




# EMIF04-1K030F3

## 4-line IPAD<sup>™</sup>, EMI filter including ESD protection



#### Figure 1. Pin configuration (bump side)





#### Figure 2. Functional schematic

#### Datasheet - production data

#### **Features**

- 4-line EMI symmetrical (I/O) low-pass filter
- High efficiency in ESD suppression on input pins (IEC 61000-4-2 level 4)
- Very low PCB space consumption
- Very thin package
- High efficiency in EMI filtering •
- High reliability offered by monolithic integration •
- High reduction of parasitic elements through integration and wafer level packaging
- Lead-free package

#### Complies with the following standards:

- IEC 61000-4-2 level 4
  - ±15 kV (air discharge)
  - ±8 kV (contact discharge)

## Application

Where EMI filtering in ESD sensitive equipment is required:

- Mobile phones and communication systems •
- Computers, printers and MCU boards •

### Description

The EMIF04-1K030F3 chip is a highly integrated device designed to suppress EMI/RFI noise for interface line filtering.

The EMIF04-1K030F3 is 4-line, ultra compact, high attenuation filter available in 0.4 mm pitch WLCSP package. Additionally, this filter includes ESD protection circuitry, which prevents damage to the protected device when subjected to ESD surges up 20 kV.

TM: IPAD is a trademark of STMicroelectronics.

#### August 2013

DocID024627 Rev 1


This is information on a product in full production.

# 1 Characteristics

Symbol	Parameter	Value	Unit
V <sub>PP</sub>	ESD discharge IEC 61000-4-2, level 4: Air discharge Contact discharge	30 20	kV
Тj	Maximum junction temperature	125	°C
T <sub>OP</sub>	Operating temperature range	- 40 to + 85	°C
T <sub>stg</sub>	Storage temperature range	- 55 to +150	°C

Table 1. Absolute maximum ratings (T<sub>amb</sub> = 25 °C)




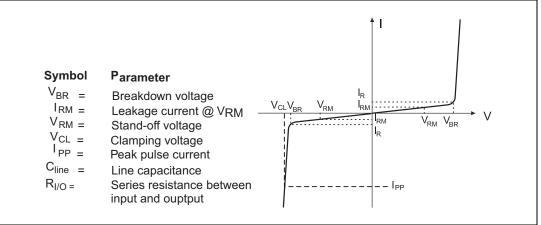


#### Table 2. Electrical characteristics (T<sub>amb</sub> = 25 °C)

Symbol	Test conditions	Min.	Тур.	Max.	Unit
I <sub>RM</sub>	V <sub>RM</sub> = 5 V per line			300	nA
V <sub>BR</sub>	I <sub>R</sub> = 1 mA	6			V
R <sub>I/O</sub>			1		kΩ
C <sub>line</sub>	$V_{\text{line}} = 0 \text{ V}, V_{\text{osc}} = 30 \text{ mV}, \text{ F} = 1 \text{ MHz}$		24	30	pF





#### Figure 6. ESD response to IEC 61000-4-2 (+8 kV contact discharge)



30M

F(Hz)

100M

300M

11-04

1G

3G

Figure 5. Analog crosstalk versus frequency

Crosstalk (dB)

0

-10-

-20-

-30-

-40-

-50

-60-

-70-

300k

ЗM

11-02

1M

10M

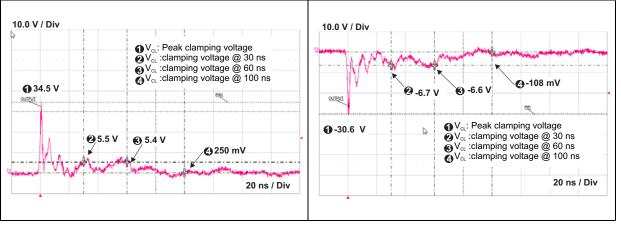

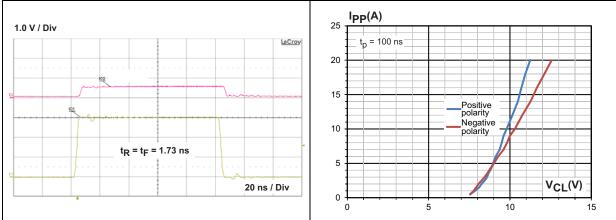


Figure 8. Digital crosstalk







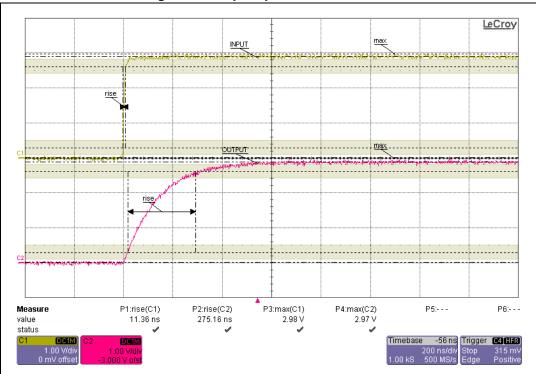



Figure 10. Step response measurement





## 2 Package information

- Epoxy meets UL94, V0
- Lead-free package

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK<sup>®</sup> packages, depending on their level of environmental compliance. ECOPACK<sup>®</sup> specifications, grade definitions and product status are available at: *www.st.com.* ECOPACK<sup>®</sup> is an ST trademark.

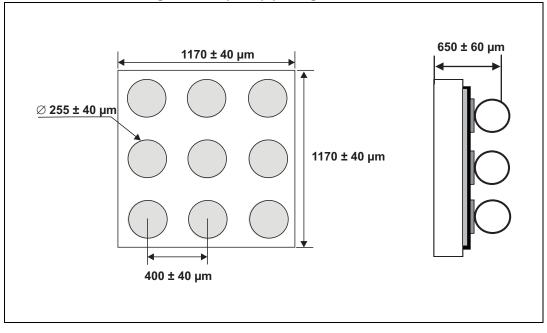




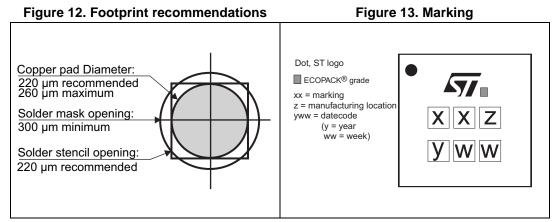



DocID024627 Rev 1

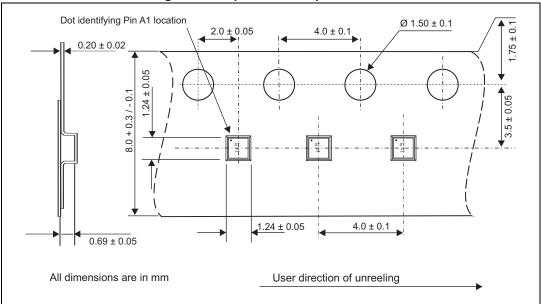




# Note: More information is available in the application notes: AN2348, "IPAD<sup>™</sup> 400 µm Flip Chip: package description and recommendations for use" AN1751, "EMI filters: recommendations and measurements"



# **3** Ordering information



	EMIF 04 - 1K0 30 F3
EMI Filter	
Number of lines	
Information	
3 letters = application	
2 digits = version	
Package	
F = Flip Chip	
x = 3: Lead-free, pitch = 400 µm	

#### Table 3. Ordering information

Order code	Marking	Package	Weight	Base qty	Delivery mode
EMIF04-1K030F3	LC	Flip Chip	1.72 mg	5000	Tape and reel (7")

# 4 Revision history

#### Table 4. Document revision history

Date	Revision	Changes
05-Aug-2013	1	Initial release



#### Please Read Carefully:

Information in this document is provided solely in connection with ST products. STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, modifications or improvements, to this document, and the products and services described herein at any time, without notice.

All ST products are sold pursuant to ST's terms and conditions of sale.

Purchasers are solely responsible for the choice, selection and use of the ST products and services described herein, and ST assumes no liability whatsoever relating to the choice, selection or use of the ST products and services described herein.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted under this document. If any part of this document refers to any third party products or services it shall not be deemed a license grant by ST for the use of such third party products or services, or any intellectual property contained therein or considered as a warranty covering the use in any manner whatsoever of such third party products or services or any intellectual property contained therein.

UNLESS OTHERWISE SET FORTH IN ST'S TERMS AND CONDITIONS OF SALE ST DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY WITH RESPECT TO THE USE AND/OR SALE OF ST PRODUCTS INCLUDING WITHOUT LIMITATION IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION), OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.

ST PRODUCTS ARE NOT AUTHORIZED FOR USE IN WEAPONS. NOR ARE ST PRODUCTS DESIGNED OR AUTHORIZED FOR USE IN: (A) SAFETY CRITICAL APPLICATIONS SUCH AS LIFE SUPPORTING, ACTIVE IMPLANTED DEVICES OR SYSTEMS WITH PRODUCT FUNCTIONAL SAFETY REQUIREMENTS; (B) AERONAUTIC APPLICATIONS; (C) AUTOMOTIVE APPLICATIONS OR ENVIRONMENTS, AND/OR (D) AEROSPACE APPLICATIONS OR ENVIRONMENTS. WHERE ST PRODUCTS ARE NOT DESIGNED FOR SUCH USE, THE PURCHASER SHALL USE PRODUCTS AT PURCHASER'S SOLE RISK, EVEN IF ST HAS BEEN INFORMED IN WRITING OF SUCH USAGE, UNLESS A PRODUCT IS EXPRESSLY DESIGNATED BY ST AS BEING INTENDED FOR "AUTOMOTIVE, AUTOMOTIVE SAFETY OR MEDICAL" INDUSTRY DOMAINS ACCORDING TO ST PRODUCT DESIGN SPECIFICATIONS. PRODUCTS FORMALLY ESCC, QML OR JAN QUALIFIED ARE DEEMED SUITABLE FOR USE IN AEROSPACE BY THE CORRESPONDING GOVERNMENTAL AGENCY.

Resale of ST products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by ST for the ST product or service described herein and shall not create or extend in any manner whatsoever, any liability of ST.

ST and the ST logo are trademarks or registered trademarks of ST in various countries. Information in this document supersedes and replaces all information previously supplied. The ST logo is a registered trademark of STMicroelectronics. All other names are the property of their respective owners.

© 2013 STMicroelectronics - All rights reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan -Malaysia - Malta - Morocco - Philippines - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

www.st.com

DocID024627 Rev 1



# **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for EMI Filter Circuits category:

Click to view products by STMicroelectronics manufacturer:

Other Similar products are found below :

761280-1 SBSGC0500224MXB SBSPP0250104MXT SBSPP0250154MXT SBSPP0500473MXT SBSPP1000102MXT SBSPP1000153MXB SBSPP1000220MCT SBSPP1000332MXT SBSPP1000470MCT SBSPP1000471MCT SBSPP1000472MXT SNZF220DFT1G CM1442-06CP EMI8041MUTAG SBSPP0500473MXB SBSPP0500683MXT SBSPP1000101MCT SBSPP1000220MCB SBSPP1000221MCT EMIF06-USD05F3 EMIF03-SIM03F3 EMI7112FCTAG EMI7403FCTBG EMI2180MTTBG CM1442-08CP CSPEMI204FCTAG SBSPP1000152MXT SBSGC5000473MXT SBSMC0500474MXT SBSMC1000334MXT EMI8043MUTAG MEA2010PE360T001 NFA18SL307V1A45L 1-6609037-5 CM1690-06DE EMIF05-SK01F3 EMIF02-USB03F2 BNX022-01L BNX024H01L BNX025H01L BNX026H01L NFA21SL806X1A48L NFL18SP157X1A3D NFL21SP106X1C3D NFL21SP207X1C3D NFL21SP307X1C3D NFL21SP506X1C3D NFL21SP706X1C3D NFW31SP207X1E4L