


## 40 A - 1200 V SCR in TO-247LL package

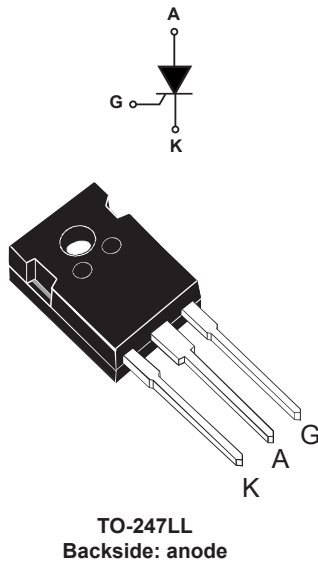

## Features

- Max. repetitive blocking voltage =  $V_{DRM}$ ,  $V_{RRM}$  = 1200 V
- $I_{GT}$  maximum = 50 mA
- RMS on state current  $I_{TRMS}$  : 40 A
- High static and dynamic commutation:
  - $di/dt$  = 100 A/ $\mu$ s
  - $dV/dt$  = 2000 V/ $\mu$ s
- **ECOPACK2** component (RoHS and HF compliance)

## Applications

- Solar / Wind renewable energy inverters and rectifiers
- Solid state relay (SSR)
- Uninterruptible power supply (UPS)
- Industrial SMPS
- Bypass
- AC DC inrush current limiter (ICL)
- AC DC voltage controlled rectifier
- Battery charger
- Industrial welding systems
- Soft starter
- Heating systems

## Description

The **TN4050-12WL** SCR is suitable in industrial application where high immunity is required with a lower gate current.

Available in through-hole high power package TO-247LL (long lead) with anode in backside.

Product status link	
<a href="#">TN4050-12WL</a>	
Product summary	
$I_{T(RMS)}$	40 A
$I_{T(AV)}$	25 A
$V_{DRM}/V_{RRM}$	1200 V
$I_{GTmax.}$	50 mA
Package	TO-247LL

# 1 Characteristics

**Table 1. Absolute maximum ratings (limiting values)**

Symbol	Parameter		Value	Unit	
$I_{T(RMS)}$	On-state RMS current (180 ° conduction angle)		40	A	
$I_{T(AV)}$	Average on-state current (180 ° conduction angle)				
$I_{TSM}$	Non repetitive surge peak on-state current ( $T_j$ initial = 25 °C), $V_R = 0$ V		$t_p = 8.3$ ms	435	A
			$t_p = 10$ ms	400	
$I^2t$	$I^2t$ value for fusing		$t_p = 10$ ms	800	A <sup>2</sup> s
$di/dt$	Critical rate of rise of on-state current $I_G = 100$ mA, $di_g/dt = 1$ A/ $\mu$ s		$T_j = 25$ °C	100	A/ $\mu$ s
$I_{GM}$	Maximum peak positive gate current	$t_p = 20$ $\mu$ s	$T_j = 125$ °C	8	A
$V_{GM}$	Maximum peak positive gate voltage			5	V
$V_{DRM}, V_{RRM}$	Repetitive peak off-state voltage (50-60 Hz)			1200	V
$P_{G(AV)}$	Average gate power dissipation		$T_j = 125$ °C	1	W
$V_{RGM}$	Maximum peak reverse gate voltage			3.5	V
$T_{stg}$	Storage junction temperature range			-40 to +150	°C
$T_j$	Operating junction temperature range			-40 to +125	

**Table 2. Electrical characteristics ( $T_j = 25$  °C unless otherwise specified)**

Symbol	Test conditions		Value	Unit	
$I_{GT}$	$V_D = 12$ V, $R_L = 33$ $\Omega$		Min.	10	mA
			Max.	50	
$V_{GT}$			Max.	1.5	V
$V_{GD}$	$V_D = V_{DRM}$ , $R_L = 3.3$ k $\Omega$	$T_j = 125$ °C	Min.	0.2	V
$I_H$	$I_T = 500$ mA, gate open		Max.	100	mA
$I_L$	$I_G = 1.2 \times I_{GT}$		Max.	130	mA
$dV/dt$	$V_D = 67\%$ $V_{DRM}$ , gate open	$T_j = 125$ °C	Min.	2	kV/ $\mu$ s
$t_{gt}$	$I_T = 40$ A, $V_D = 67\%$ $V_{DRM}$ , $I_G = 100$ mA, $(di_G/dt)_{max} = 0.2$ A/ $\mu$ s		Typ.	2	$\mu$ s
$t_q$	$I_{TM} = 40$ A, $V_D = 67\%$ $V_{DRM}$ (800 V), $di_{TM}/dt = 30$ A/ $\mu$ s, $V_R = 25$ V, $dV_D/dt = 200$ V/ $\mu$ s	$T_j = 125$ °C	Typ.	100	$\mu$ s

**Table 3. Static characteristics**


Symbol	Test conditions			Value	Unit
$V_{TM}$	$I_{TM} = 80\text{ A}$ , $t_p = 380\ \mu\text{s}$	$T_j = 25\text{ }^\circ\text{C}$	Max.	1.75	V
$V_{TO}$	Threshold voltage	$T_j = 125\text{ }^\circ\text{C}$	Max.	0.9	
$R_D$	Dynamic resistance	$T_j = 125\text{ }^\circ\text{C}$	Max.	9.8	m $\Omega$
$I_{DRM}$ , $I_{RRM}$	$V_{DRM} = V_{RRM} = 1200\text{ V}$	$T_j = 25\text{ }^\circ\text{C}$	Max.	10	$\mu\text{A}$
		$T_j = 125\text{ }^\circ\text{C}$		5	mA

**Table 4. Thermal parameters**


Symbol	Parameter		Value	Unit
$R_{th(j-c)}$	Junction to case (DC)	Max.	0.55	$^\circ\text{C/W}$
$R_{th(j-a)}$	Junction to ambient (DC)	Typ.	50	

## 1.1 Characteristics curves


**Figure 1. Maximum average power dissipation versus average on-state current**

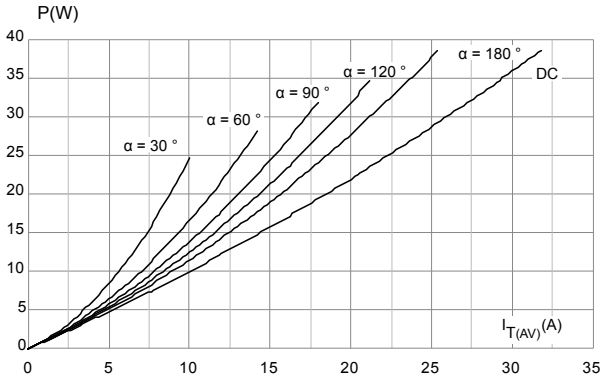


**Figure 2. Average and DC on-state current versus case temperature**

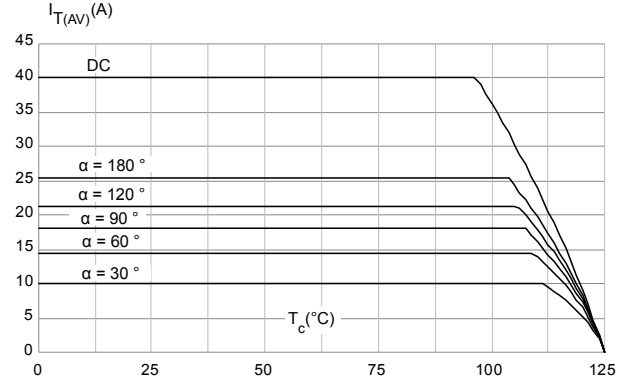


**Figure 3. On-state characteristics (maximum values)**

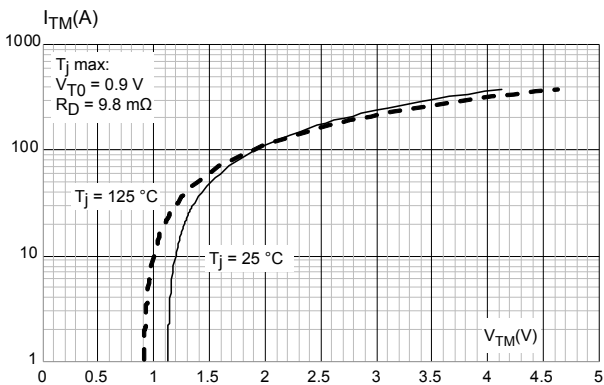


**Figure 4. Average and D.C. on-state current versus ambient temperature**

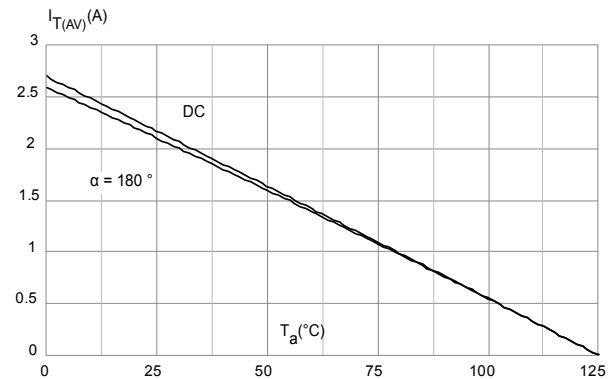


**Figure 5. Relative variation of thermal impedance junction to case and junction to ambient versus pulse duration**

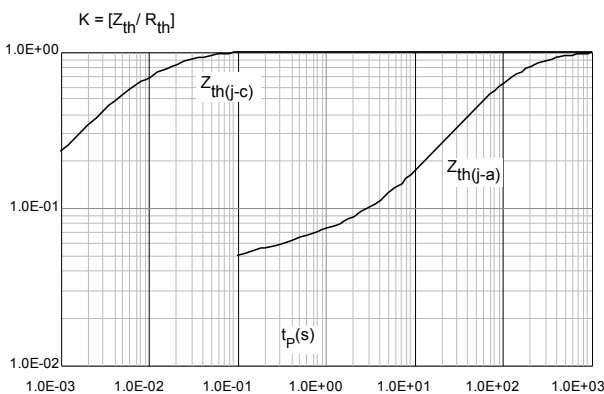


**Figure 6. Surge peak on-state current versus number of cycles**

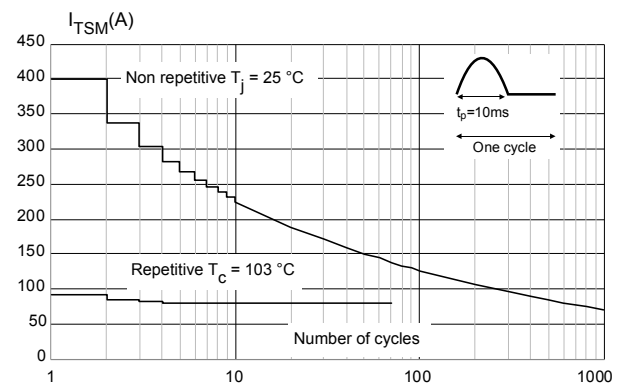


**Figure 7. Non repetitive surge peak on-state current for a sinusoidal pulse with width  $t_p < 10$  ms**

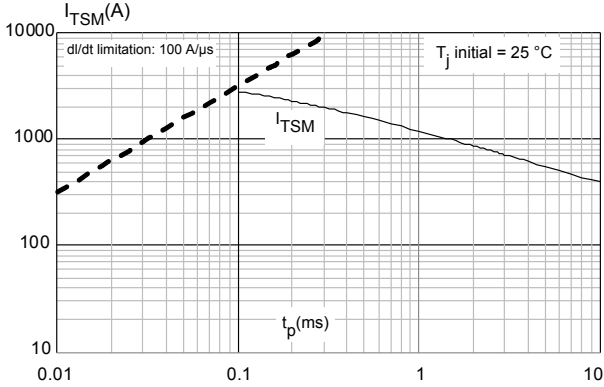


**Figure 8. Relative variation of gate trigger current and gate trigger voltage versus junction temperature (typical value)**

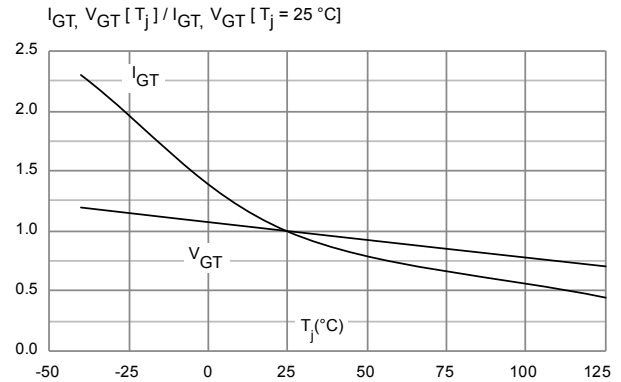


**Figure 9. Relative variation of holding and latching current versus junction temperature (typical value)**

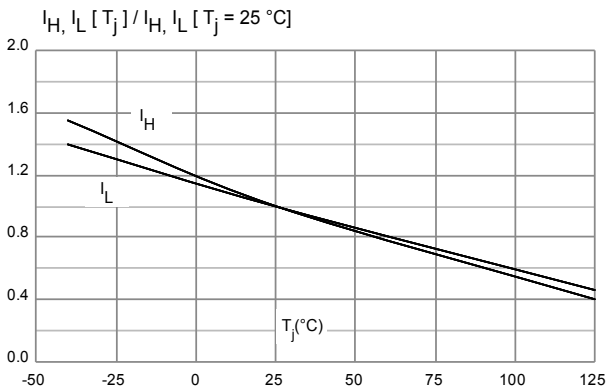

**Figure 10. Relative variation of static dV/dt immunity versus junction temperature**

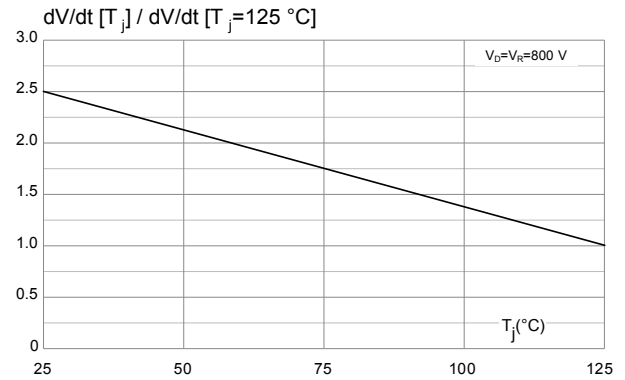

**Figure 11. Relative variation of leakage current versus junction temperature for different values of blocking voltage (typical values)**

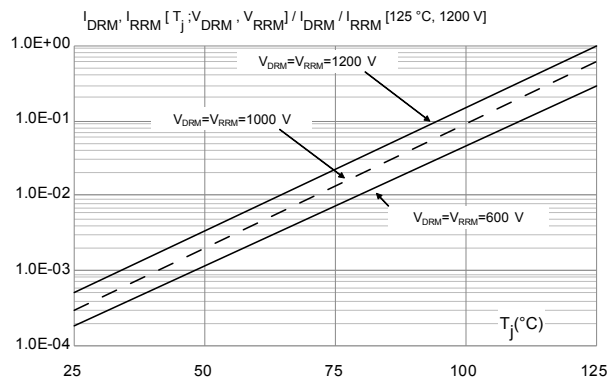


## 2 Package information

In order to meet environmental requirements, ST offers these devices in different grades of **ECOPACK** packages, depending on their level of environmental compliance. ECOPACK specifications, grade definitions and product status are available at: [www.st.com](http://www.st.com). ECOPACK is an ST trademark.

### 2.1 TO-247LL package information

- Molding epoxy resin is halogen free and meets UL94 level V0
- lead free plating of the package leads
- Cooling method: by conduction (C)
- Recommended torque value: 0.8 to 1.0 N·m

Figure 12. TO-247 long leads package outline

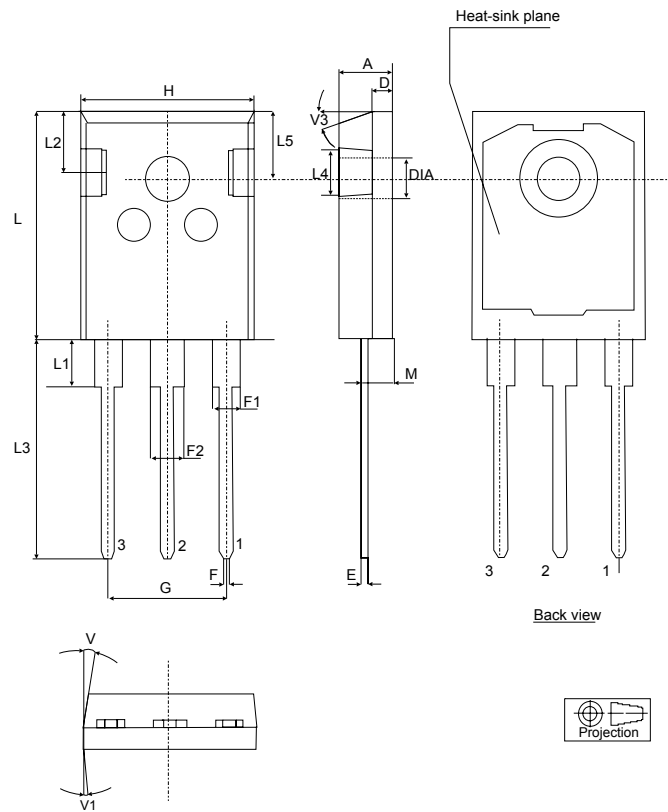

**Table 5. TO-247 long leads package mechanical data**

Dim.	mm.			Inches (only for reference)		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	4.90		5.15	0.1929		0.2028
D	1.85		2.10	0.0728		0.0827
E	0.55		0.67	0.0217		0.0264
F	1.07		1.32	0.0421		0.0520
F1	1.90		2.38	0.0748		0.0937
F2	2.87		3.38	0.1130		0.1331
G	10.90 BSC			0.429 BSC		
H	15.77		16.02	0.6209		0.6307
L	20.82		21.07	0.8197		0.8295
L1	4.16		4.47	0.1638		0.1760
L2	5.49		5.74	0.2161		0.2260
L3	20.05		20.30	0.7894		0.7992
L4	3.68		3.93	0.1449		0.1547
L5	6.04		6.29	0.2378		0.2476
M	2.25		2.55	0.0880		0.1010
V		10°			10°	
V1		3°			3°	
V3		20°			20°	
DIA	3.55		3.66	0.1398		0.1441

*Note: Resin thickness around the mounting hole is not less than 0.9 mm*

### 3 Ordering information

Figure 13. Ordering information scheme

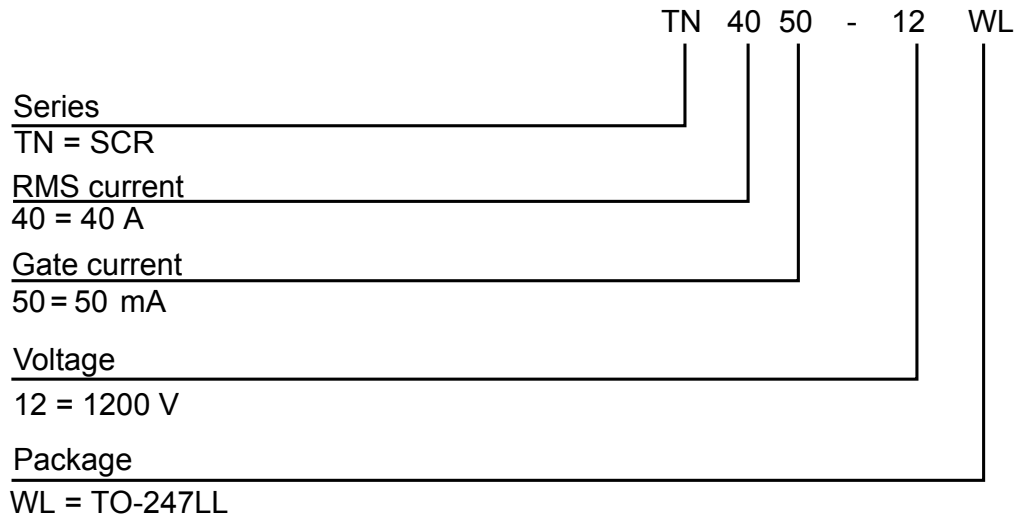


Table 6. Ordering information

Order code	Marking	Package	Weight	Base qty.	Delivery mode
TN4050-12WL	TN4050-12	TO-247LL	6.09 g	30	Tube



## Revision history

**Table 7. Document revision history**

Date	Revision	Changes
18-Feb-2020	1	Initial release.

**IMPORTANT NOTICE – PLEASE READ CAREFULLY**

STMicroelectronics NV and its subsidiaries (“ST”) reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST’s terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers’ products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. For additional information about ST trademarks, please refer to [www.st.com/trademarks](http://www.st.com/trademarks). All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2020 STMicroelectronics – All rights reserved

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Triacs](#) category:*

*Click to view products by [STMicroelectronics](#) manufacturer:*

Other Similar products are found below :

[CTA08-1000CW](#) [CTB24-800BW](#) [CTA08-1000C](#) [CTA12-800BWPT](#) [CTA16-1000B](#) [CTB24-800B](#) [BT137-600-0Q](#) [5615](#) [OT415Q](#) [2N6075A](#)  
[NTE5629](#) [NTE5688](#) [CTB08-400CW](#) [D31410](#) [T2535T-8I](#) [BTA425Z-800BTQ](#) [KS100N12](#) [TOPT16-800C0,127](#) [OT408,135](#) [BT134-800E](#)  
[BT136D](#) [BTB16Q-600BW](#) [Z0409MF](#) [BTA04-600B](#) [BTA06-600BRG](#) [BTA06-800BWRG](#) [BTA08-600BRG](#) [BTA08-800B](#) [BT136-600,127](#)  
[MAC97A6,116](#) [BT137-600E,127](#) [BTB16-600CW3G](#) [BTB16-600CW3G](#) [Z0109MN,135](#) [T825T-6I](#) [T1220T-6I](#) [NTE5638](#) [ACST1235-8FP](#)  
[BT136X-600E,127](#) [MAC4DLM-1G](#) [BT134-600D,127](#) [BTA08-600BW3G](#) [NTE56008](#) [NTE56017](#) [NTE56018](#) [NTE56059](#) [NTE5608](#)  
[NTE5609](#) [NTE5656](#) [NTE56020](#)