

SK3200R

Band20, RF-Rx SAW Filter
Revision 5.0 : April 2020

- Features**
- Specifications**
- Matching Configuration**
- Package Dimension**
- Typical Performance**

MSL 3 Device



Features

- ✧ For RF SAW filter
- ✧ Single-ended operation
- ✧ Ceramic Surface Mount Package
- ✧ RoHS compliant (2002/95/EC), Pb-free

Specifications

Parameter		Unit	Minimum	Typical	Maximum
Insertion Loss (791~821MHz)		dB	-	2.3	4.5
Amplitude ripple@20MHz (791~821MHz)		dB	-	0.5	3.5
VSWR @RX port(791~821MHz)		dB	-	1.8	4
VSWR @Ant port(791~821MHz)				1.9	4
Absolute Attenuation	10 – 770MHz	dB	40	45	-
	832 – 862 MHz	dB	30	33	
	862 – 6000 MHz	dB	18	25	
Material Temperature coefficient		KHz/°C	-25.79		
Substrate Material		-	42LT		
Ambient Temperature		°C	25		
Operating Temperature Range		° C	-30	-	+85
Storage Temperature Range		° C	-40	-	+85
Package Size		CSP1.1*0.9			

Notes:

1. All specifications are based on the test circuit shown;
2. In production, all specifications are measured by Agilent Network analyzer and full 2 port calibration at room temperature;
3. Electrical margin has been built into the design to account for the variations due to temperature drift and manufacturing tolerances;
4. This is the optimum impedance in order to achieve the performance show.


Matching Configuration



Source/Load Impedance=50 ohm

Notes - Component values may change depending on board layout.

Package Dimension




Pad Configuration:

Input <1>

Output <4>


Ground All others

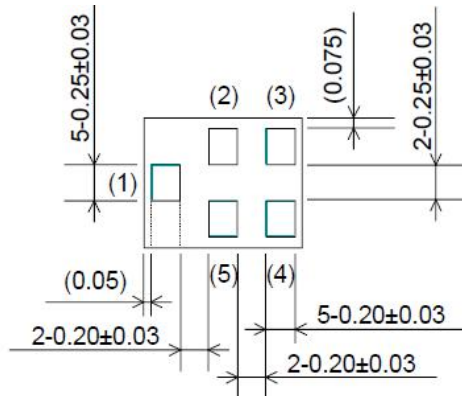

Package: 1.1*0.9

Unit: mm

Typical Performance

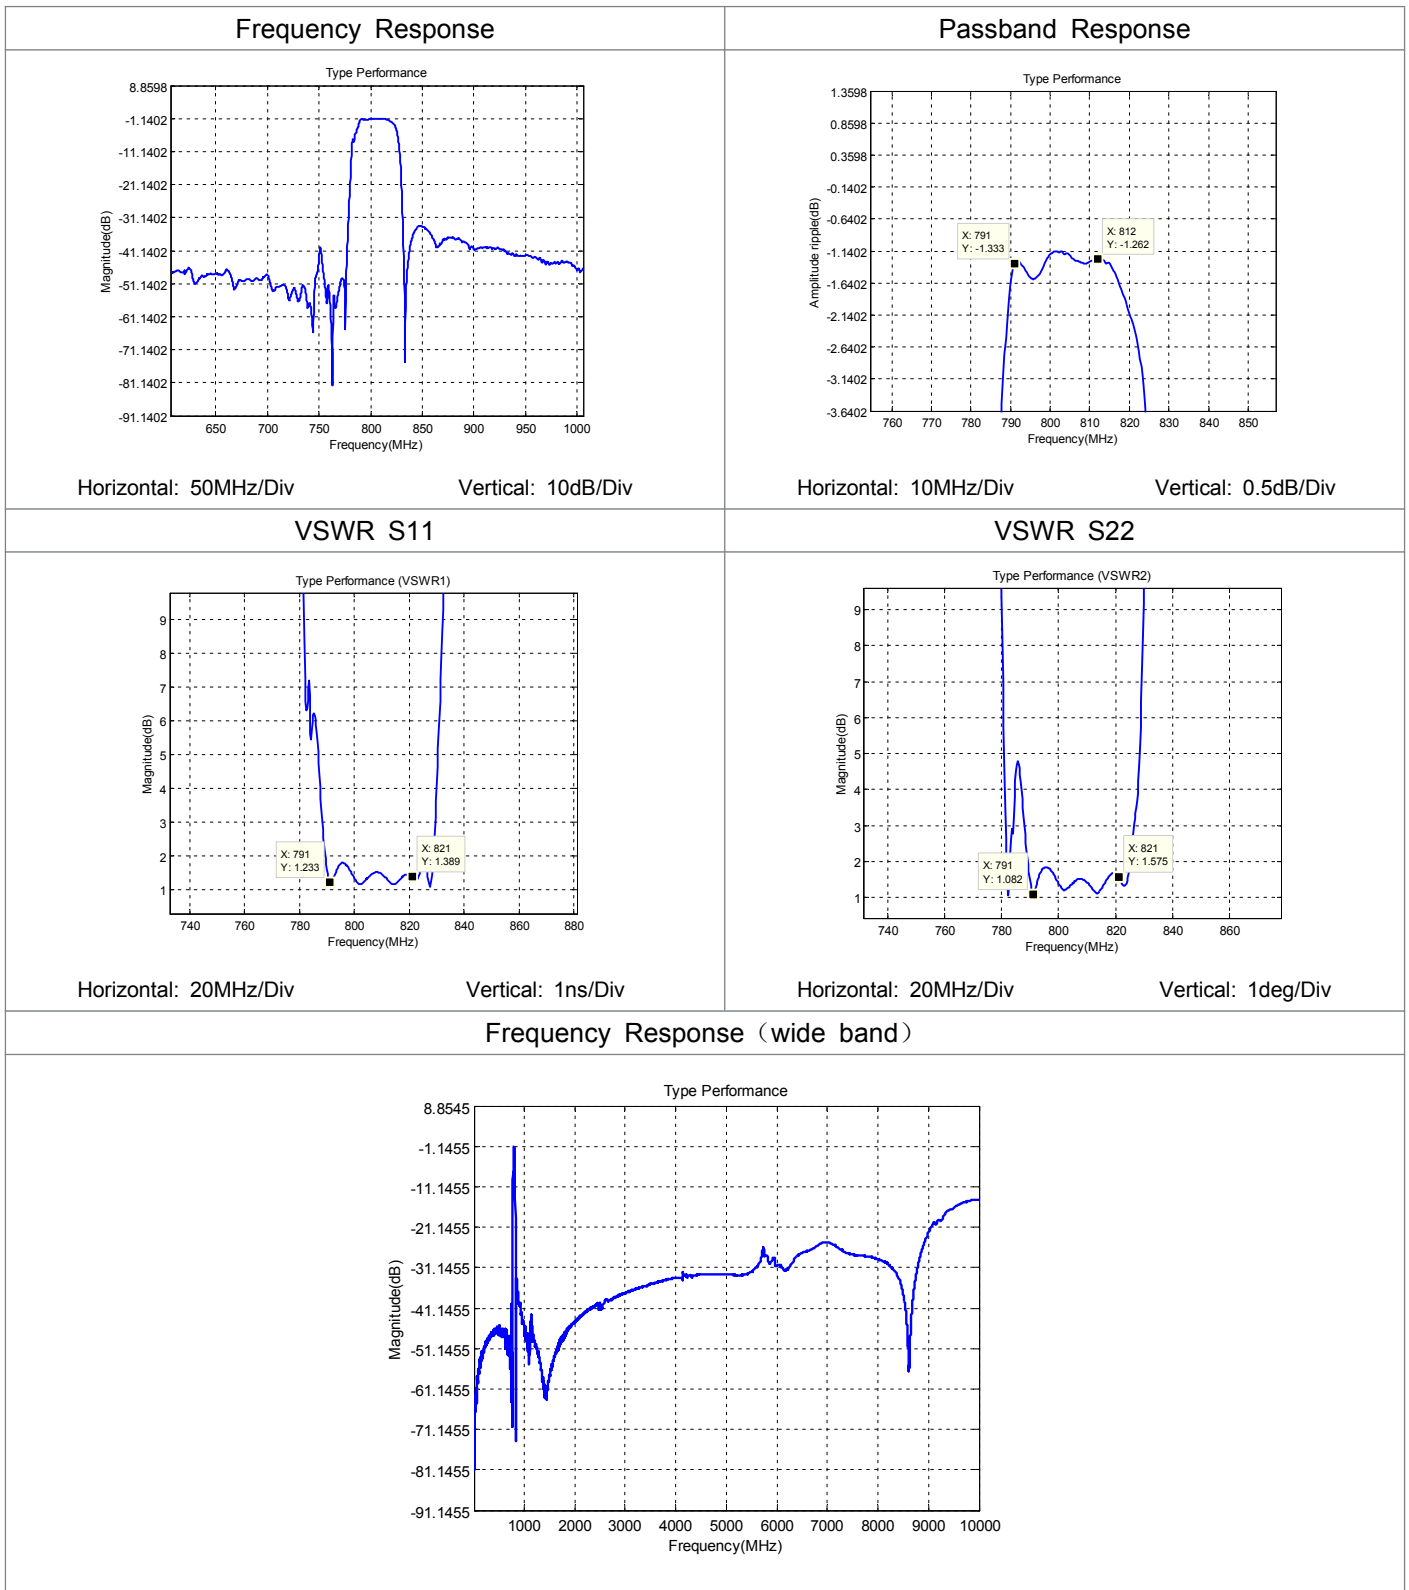

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Signal Conditioning](#) category:

Click to view products by [Suntek](#) manufacturer:

Other Similar products are found below :

[MAPDCC0001](#) [MAPDCC0004](#) [PD0409J5050S2HF](#) [HHS-109-PIN](#) [AFS14A35-1591.50-T3](#) [DS-323-PIN](#) [DSS-313-PIN](#) [B39321R801H210](#)
[1A0220-3](#) [JP510S](#) [LFB212G45SG8C341](#) [LFB322G45SN1A504](#) [LFL182G45TC3B746](#) [SF2159E](#) [30057](#) [AFS1575.42S4-T](#) [FM-104-PIN](#)
[CER0813B](#) [MAPDCC0005](#) [3A325](#) [40287](#) [41180](#) [ATB3225-75032NCT](#) [BD0810N50100AHF](#) [JHS-115-PIN](#) [DC0710J5005AHF](#)
[DC2327J5005AHF](#) [43020](#) [LFB2H2G60BB1C106](#) [LFL15869MTC1B787](#) [X3C19F1-20S](#) [XC3500P-20S](#) [10013-20](#) [SF2194E](#)
[CDBLB455KCAX39-B0](#) [TGL2208-SM, EVAL](#) [RF1353C](#) [051157-0000](#) [PD0922J5050D2HF](#) [1E1305-3](#) [1F1304-3S](#) [1G1304-30](#)
[B0922J7575AHF](#) [10017-3](#) [TP-103-PIN](#) [BD1222J50200AHF](#) [BD1722J50100AHF](#) [2450DP39K5400E](#) [BD0810J50150AHF](#)
[BD1722J50200AHF](#)