

## DESCRIPTION

The SG3D15B36MA is a low capacitance transient voltage suppressor array, designed to protect applications such as portable electronics and SMART phones. This series is rated at 150 Watts for an 8/20 $\mu$ s waveshape.

The SG3D15B36MA meets IEC 61000-4-2 (ESD) and IEC 61000-4-4 (EFT) requirements. At higher operating frequencies or faster edge rates, insertion loss and signal integrity are a major concern. The SG3D15B36MA offers a low capacitance and low leakage current in a miniature SOD-323 package.

## FEATURES

- >150 Watts Peak Pulse Power per Line (tp=8/20 $\mu$ s)
- >Protects One Power or I/O Port
- >Low clamping voltage
- >Low leakage current

## APPLICATIONS

- >Ethernet - 10/100/1000 Base T
- >Cellular Phones
- >I<sup>2</sup>C Bus Protection
- >Parallel & Serial Port Protection
- >Personal Digital Assistant (PDA)
- >Microcontroller Input Protection
- >WAN/LAN Equipment

## IEC COMPATIBILITY


- >IEC61000-4-2 (ESD)  $\pm$ 15kV (air),  $\pm$ 8kV (contact)
- >IEC61000-4-4 (EFT) 40A (5/50ns)

## MAXIMUM RATINGS @ 25°C UNLESS OTHERWISE SPECIFIED



PARAMETER	SYMBOL	VALUE	UNIT
Peak Pulse Power (tp=8/20 $\mu$ s waveform)	PPP	150	Watts
Operating Temperature Range	T <sub>J</sub>	-55~125	°C
Storage Temperature Range	T <sub>STG</sub>	-55~150	°C

## ELECTRICAL CHARACTERISTICS PER LINE @ 25°C UNLESS OTHERWISE SPECIFIED

PART NUMBER	DEVICE MARKING	V <sub>RWM</sub>	V <sub>B</sub>	I <sub>T</sub>	V <sub>C @1A</sub>	V <sub>C</sub>		I <sub>R</sub>	C <sub>T</sub>
		(V) Max.	(V) Min.	(mA)	Max.	Max.	@A	( $\mu$ A) Max.	(pF) Typ.
SG3D15B36MA	KC	36.0	40.0	1	60.0	75.0	2.0	1.0	1.0




### CHARACTERISTIC CURVES

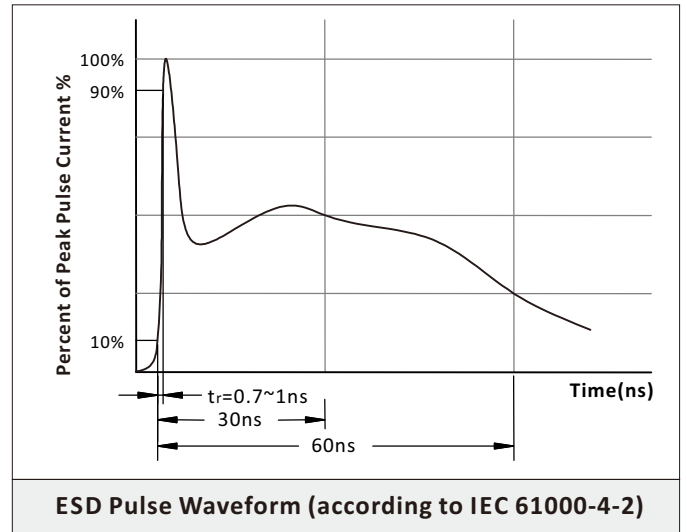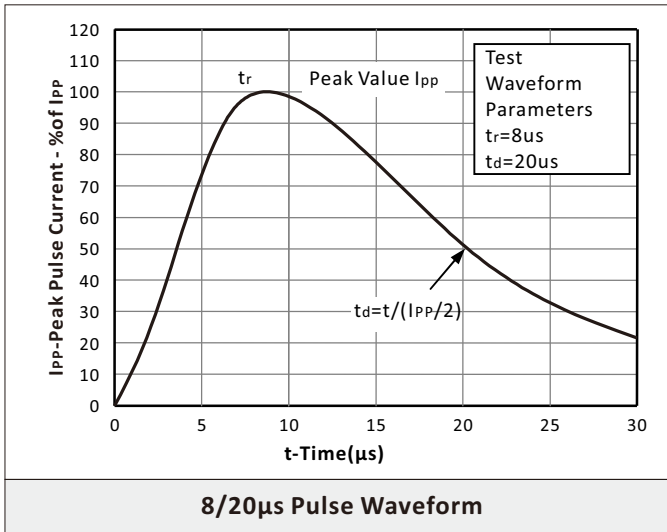


### REFLOW PROFILE

Reflow Condition		Lead-free assembly
Pre Heat	Temperature Min ( $T_{s(min)}$ )	150°C
	Temperature Max ( $T_{s(max)}$ )	200°C
	Time (min to max) ( $t_s$ )	60 – 180 secs
Average ramp up rate (Liquidus Temp ( $T_L$ ) to peak)		3°C/second max
$T_{s(max)}$ to $T_L$ - Ramp-up Rate		3°C/second max
Reflow	Temperature ( $T_L$ ) (Liquidus)	217°C
	Time (min to max) ( $t_L$ )	60 – 150 seconds
Peak Temperature ( $T_P$ )		260°C
Time within 5°C of actual peak Temperature ( $t_p$ )		20 – 40 seconds
Ramp-down Rate		6°C/second max
Time 25°C to peak Temperature ( $T_P$ )		8 minutes Max.
Do not exceed		260°C

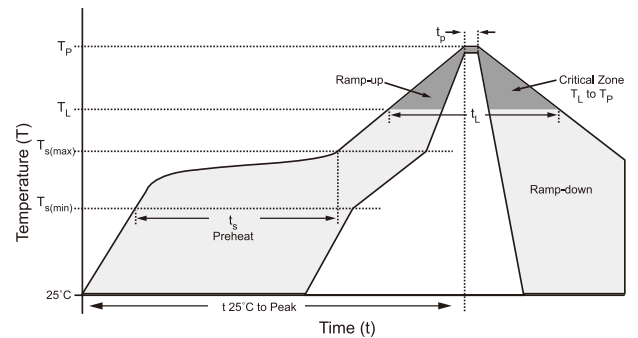


**SOD-323 PACKAGE INFORMATION**

OUTLINED DIMENSIONS				
DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	1.60	1.90	0.063	0.075
B	1.15	1.45	0.045	0.057
C	2.39	2.70	0.094	0.106
D	0.80	1.10	0.031	0.043
E	0.25	0.40	0.010	0.016
F	0.10	0.20	0.004	0.008
H	-	0.10	-	0.004
L	0.20	-	0.008	-

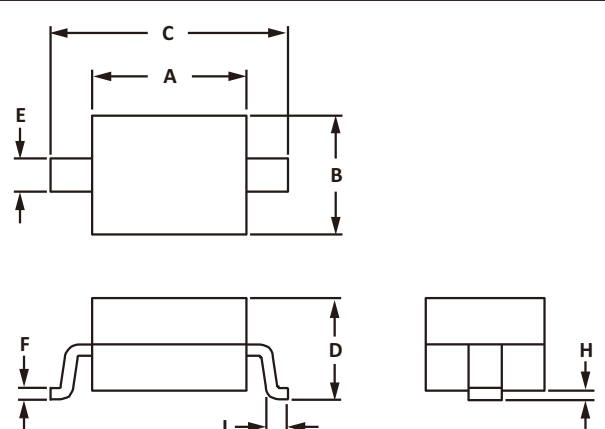
**RECOMMENDED PAD LAYOUT DIMENSION**

PAD LAYOUT DIMENSIONS				
DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	2.87	3.12	0.113	0.123
B	0.66	0.91	0.026	0.036
C	0.66	0.91	0.026	0.036

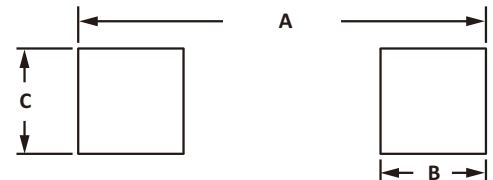
**ORDERING INFORMATION**

Part Number	Component Package	QTY/Reel	Reel Size
SG3D15B36MA	SOD-323	3000PCS	7"

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [ESD Suppressors / TVS Diodes](#) category:*

*Click to view products by [SURGING](#) manufacturer:*

Other Similar products are found below :

[60KS200C](#) [D18V0L1B2LP-7B](#) [D5V0F4U5P5-7](#) [NTE4902](#) [P4KE27CA](#) [P6KE11CA](#) [P6KE39CA-TP](#) [P6KE8.2A](#) [JANTX1N6053A](#)  
[SA110CA](#) [SA60CA](#) [SA64CA](#) [SMBJ12CATR](#) [SMBJ33CATR](#) [SMBJ8.0A](#) [ESD101-B1-02ELS E6327](#) [ESD105-B1-02EL E6327](#) [ESD112-B1-02EL E6327](#) [ESD119B1W01005E6327XTSA1](#) [ESD5V0L1B02VH6327XTSA1](#) [ESD7451N2T5G](#) [19180-510](#) [CPDT-5V0USP-HF](#)  
[3.0SMCJ33CA-F](#) [3.0SMCJ36A-F](#) [HSPC16701B02TP](#) [JANTX1N6126A](#) [JANTX1N6462](#) [JANTX1N6465](#) [USB50805e3/TR7](#)  
[D3V3Q1B2DLP3-7](#) [D55V0M1B2WS-7](#) [DRTR5V0U4SL-7](#) [SCM1293A-04SO](#) [ESD200-B1-CSP0201 E6327](#) [SM12-7](#) [SM1605E3/TR13](#)  
[SMLJ45CA-TP](#) [CEN955 W/DATA](#) [82350120560](#) [VESD12A1A-HD1-GS08](#) [CPDUR5V0R-HF](#) [CPDQC5V0U-HF](#) [CPDQC5V0USP-HF](#)  
[CPDQC5V0-HF](#) [D1213A-01LP4-7B](#) [ESD101-B1-02EL E6327](#) [824500181](#) [MMAD1108/TR13](#) [5KP100A](#)