
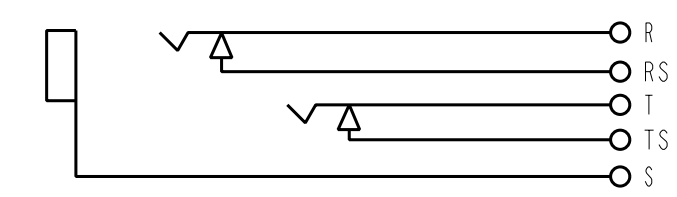


NOTES:

- MATES WITH SWITCHCRAFT PLUG TT-253.
- SPECIFICATIONS:
  - ELECTRICAL: DIELECTRIC WITHSTANDING VOLTAGE 500VAC.  
CONTACT RESISTANCE 0.020 Ω MAX (INITIAL)  
INSULATION RESISTANCE 10<sup>10</sup> Ω AT 500 VDC (INITIAL)
  - ENVIRONMENTAL: THERMAL LIMITS -55°C TO 85°C (NON OPERATING)  
THERMAL SHOCK MIL-STD-202 METHOD 107  
SALT SPRAY MIL-STD-202 METHOD 101  
MOISTURE RESISTANCE MIL-STD-202 METHOD 106 (LESS STEPS 7A & 7B)
  - MECHANICAL: SHOCK MIL-STD-202 METHOD 213  
VIBRATION MIL-STD-202 METHOD 201  
INSERTION FORCE 7 LBS MAX (31.14 N)  
WITHDRAWAL FORCE 1.5 LBS MAX (6.67 N)
  - MATERIALS: HOUSING GLASS FILLED THERMOPLASTIC UL94V-0  
SPRINGS COPPER ALLOY, SILVER PLATED  
CONTACTS GOLD ALLOY (W.E.#1) CROSSBAR
  - MECHANICAL LIFE: 10K CYCLES
- THIS PRODUCT IS RoHS COMPLIANT.

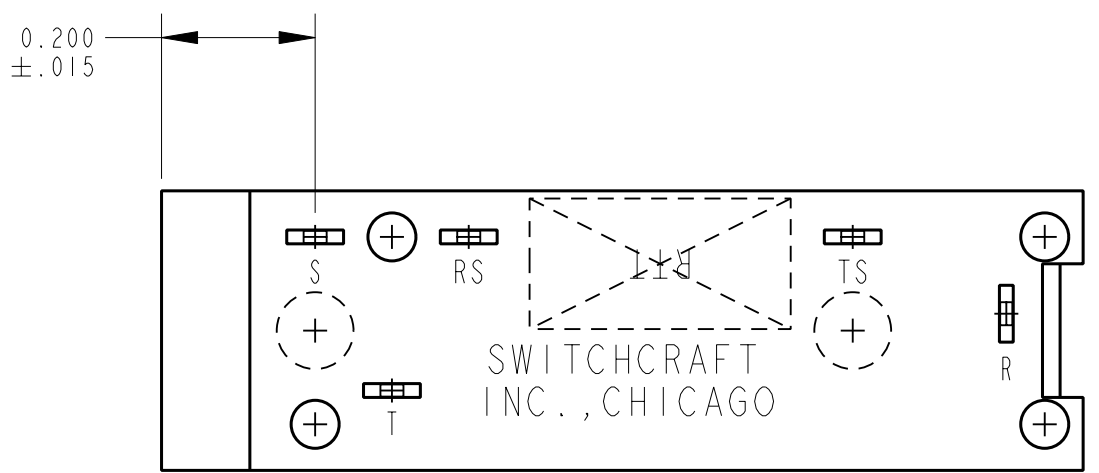

CUSTOMER DRAWING

☆ STAR SYMBOL DENOTES CRITICAL DIMENSION UNLESS OTHERWISE SPECIFIED 1. ALL DIMENSIONS IN INCHES - TWO PLACE DECIMALS ±0.01 - THREE PLACE DECIMALS ±0.005 - ANGLES ±1° - ALL DIA. CONCENTRIC WITHIN 0.005 T.I.R. 2. FEATURES ON THE SAME CENTERLINE MUST BE ALIGNED WITHIN ±0.002 3. REMOVE ALL BURRS DO NOT SCALE DRAWING					THIS DRAWING DESCRIBES A DESIGN CONSIDERED PROPRIETARY IN NATURE, DEVELOPED AND MANUFACTURED BY SWITCHCRAFT INC. AND IS RELEASED ON A CONFIDENTIAL BASIS FOR IDENTIFICATION PURPOSES ONLY.				
SIZE		WIDTH		MULT		LBS/M		TEMPER	
FINISH SPEC No.					MATERIAL SPEC No.				
FIRST USED ON					SCALE 4:1				
DATE DRAWN	BY	CHKD	APVD						
08-Aug-08	JEB	JEB	TJK						
NAME			RIGHT ANGLE SINGLE			PART No.		REV	
TT JAX - 3 CONDUCTOR, RoHS			RTT34-RTTC34 SERIES			A			
REVISIONS									
REV	ECO NUMBER	DATE	BY	APVD					
A	26162	10-17-06	JEB	TJK					

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Phone Connectors](#) category:*

*Click to view products by [Switchcraft](#) manufacturer:*

Other Similar products are found below :

[M444B](#) [6J1041A](#) [R4F](#) [E12BPKG](#) [ECP4PKG](#) [161-3502L-E](#) [MT333X](#) [171-0350-EX](#) [171-101A-EX](#) [171-3325-EX](#) [176S](#) [NC3MG-V](#)  
[NS112BX](#) [NYS228G](#) [P10834](#) [P2380](#) [P2381X](#) [P2411X](#) [P2412](#) [P2724](#) [JM2PB-AU BULK](#) [9144](#) [S2674](#) [280L](#) [163-158N-2-E](#) [171-3308-EX](#)  
[171-3500-E](#) [2501FT](#) [CMT335](#) [M10662](#) [330Q](#) [RJ5VI-S](#) [40116](#) [TM1R-AU](#) [TM2PBMJ-AU](#) [TM2PJ-AU](#) [TM2PJ-AU BULK](#) [4803.1351](#)  
[49201](#) [49205](#) [TS3PBJ-AU](#) [TS3PBMJ-AU](#) [TT32BX](#) [54B](#) [40112](#) [40205](#) [415](#) [XMT332B](#) [52170017-331](#) [570](#)