

# MODEL TL-5930


International size reference: D, ER32L615

## TECHNICAL DATA

(Typical values @+ 25°C for batteries stored for one year or less)




■ Nominal capacity @ 4 mA, to 2 V	19 Ah
■ Rated voltage	3.6 V
■ Maximum recommended continuous current	230 mA
■ Maximum pulse current capability	500 mA
■ Weight	93 g (3.28 oz)
■ Volume	51 cc
■ Operating temperature range	-55 °C to +85 °C
■ Li metal content	approx. 5 g
■ U.L. Component Recognition, MH 12193	

**TADIRAN**  
**LITHIUM**  
**BATTERIES**

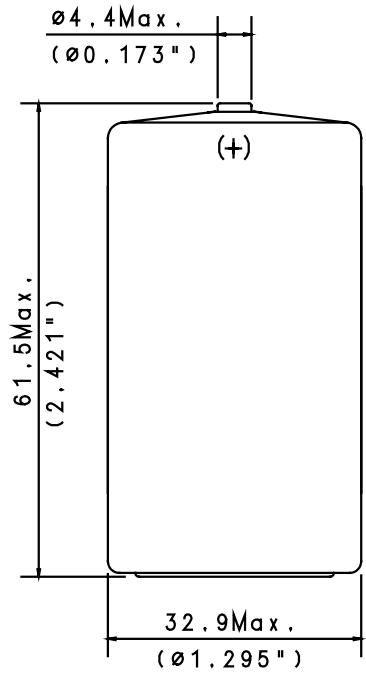

### TERMINATIONS & ORDERING NO.

SUFFIX- /S STANDARD	15-5930-21500
SUFFIX- /T SOLDER TABS	15-5930-31500

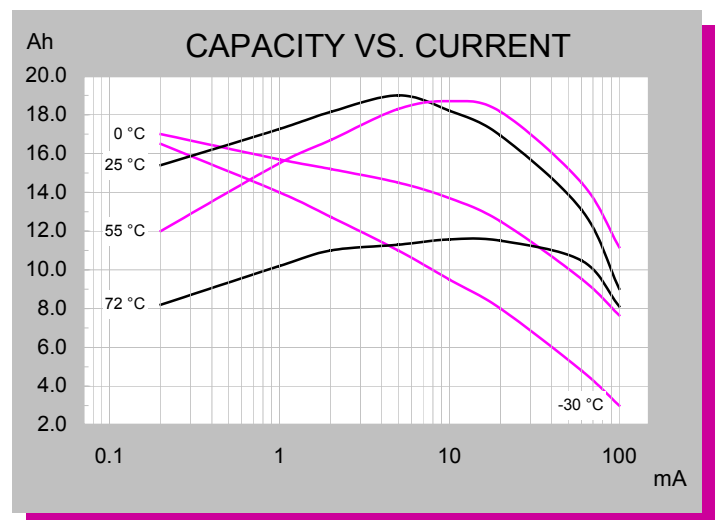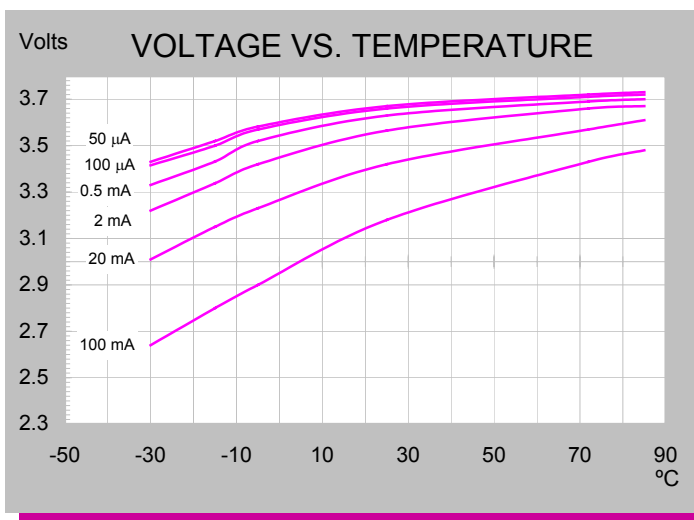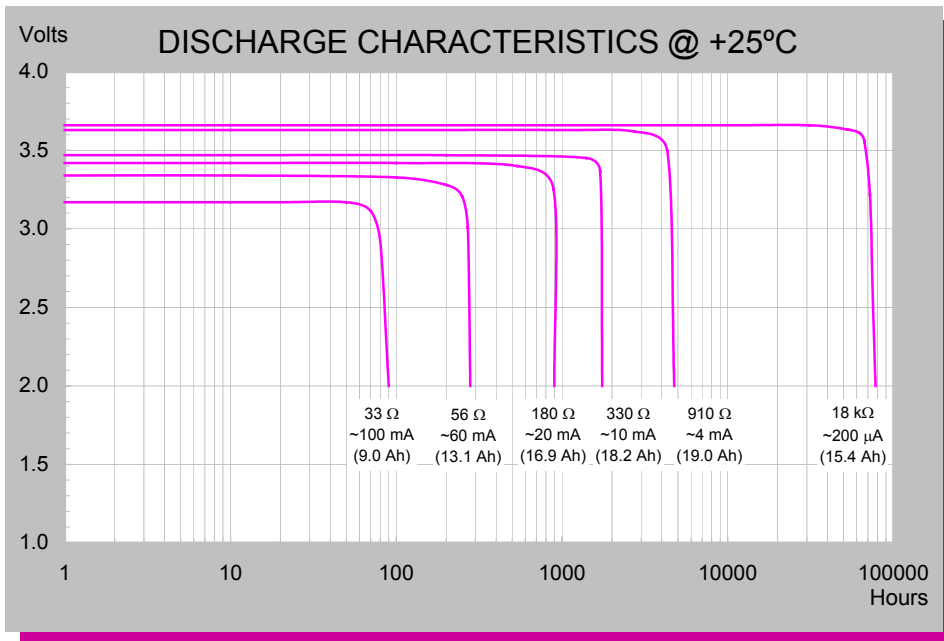

**iXtra - Long Term High Performance**

Note: Any presentations in this data sheet concerning performance are for information purpose only and are not construed as warranties either expressed or implied, of future performance.

ECN 1501879 Rev. C 11/08

# TL-5930


## CELL FEATURES

- 3.6 V Primary lithium-thionyl chloride (Li-SOCl<sub>2</sub>)
- Fast voltage recovery after long term storage and/or usage
- High energy density
- Low self discharge rate
- Bobbin construction
- Hermetic glass-to-metal-sealing
- Non-flammable electrolyte
- Restricted for transportation (Class 9 worldwide)
- Non-restricted within the US

# TADIRAN LITHIUM BATTERIES

## MAIN APPLICATIONS



- Utility meters (elect., water & gas)
- Automatic meter reading
- RF systems
- Sensors & monitoring systems
- Tracking systems
- Wireless security systems
- Automotive electronics
- Industrial electronics
- Ultra Low Power (ULP) devices
- Others

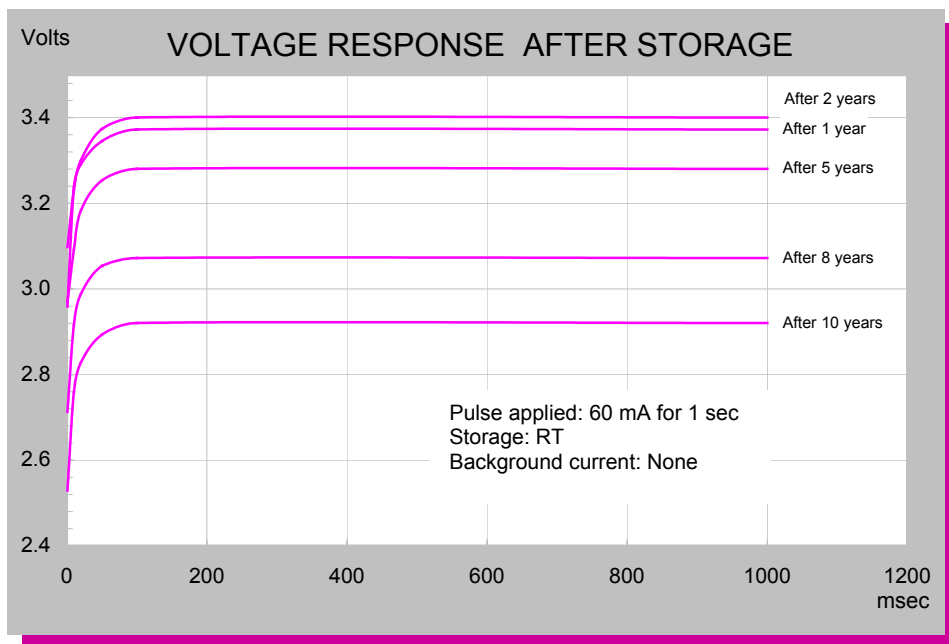

## STORAGE CONDITIONS

- Cells should be stored in a clean & dry (less than 30 % RH) area
- Temp. should not exceed +30 °C

For updated information please visit our website [www.tadiranbat.com](http://www.tadiranbat.com)

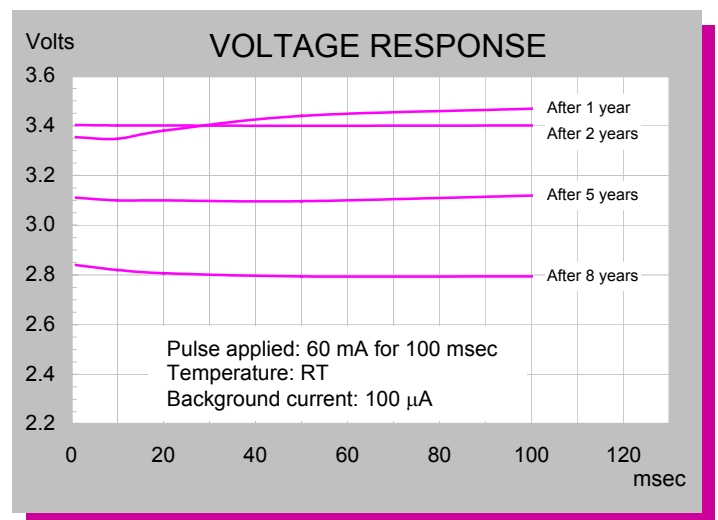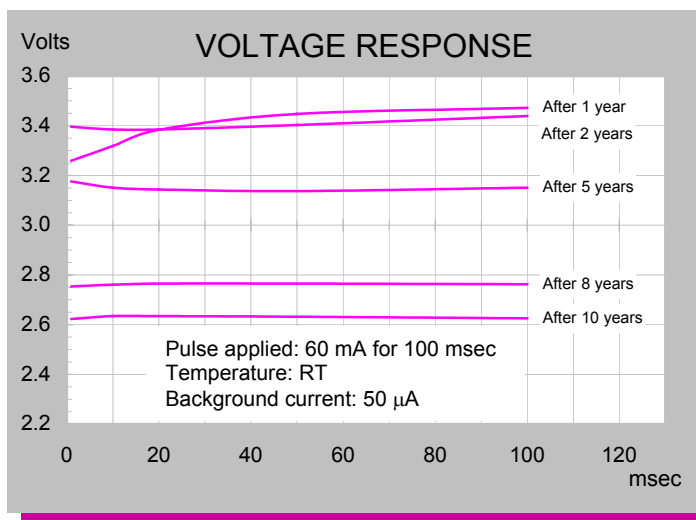

## *iXtra - Long Term High Performance*

Note: Any presentations in this data sheet concerning performance are for information purpose only and are not construed as warranties either expressed or implied, of future performance.

ECN 1501879 Rev. C 11/08

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Electronic Battery](#) category:*

*Click to view products by [Tadiran](#) manufacturer:*

Other Similar products are found below :

[R88A-BAT02W](#) [TL-5104/SBP](#) [E300781900](#) [E300782100](#) [BR-435/BN](#) [B73180A0101M199](#) [13299-0001](#) [R88A-BAT01G](#) [R88A-BAT01W](#)  
[M4T32-BR12SH6](#) [LR03AD/4P](#) [13331-0001](#) [3G2A9BAT08](#) [LR03AD/B](#) [LR20AD/B](#)