

XX Type


3.2 x 2.5 mm SMD Crystal

FEATURE

- Typical 3.2 x 2.5 x 0.7 mm ultra thin ceramic package.
- 8mm width Tape & Reel package for automatic assembly.
- Tight tolerance 10 ppm available.


TYPICAL APPLICATION

- Bluetooth, Mobile Phone, GPS
- Wireless LAN, 4G/LTE
- Hard Disk




RoHS Compliant

DIMENSION (mm)

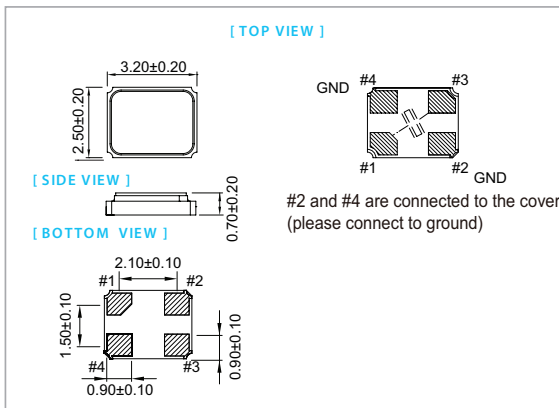

SOLDER PAD LAYOUT (mm)

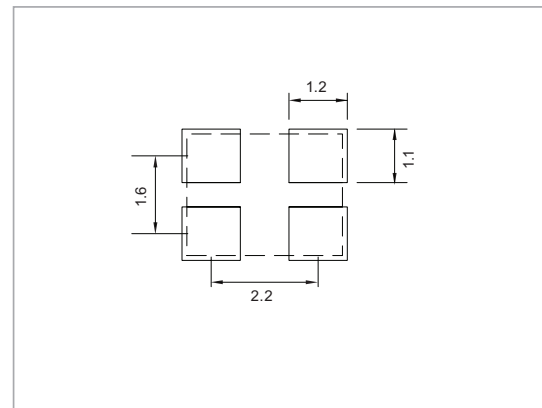

ELECTRICAL SPECIFICATION

| Parameter | Min. | Typical | Max. | Unit |
|------------------------|----------------|------------------------|------|------------|
| Storage Temp. Range | -55 | - | 125 | °C |
| Standard Frequency | | 16, 24, 26, 27, 32, 40 | | MHz |
| Level of Drive | - | 10 | 200 | μw |
| Shunt Capacitance (Co) | - | - | 3.0 | pF |
| Insulation Resistance | 500 MΩ@ DC100V | - | - | |
| Aging | | ±1.0 to ±3.0 | | ppm / year |

Standard frequencies are frequencies which the crystal has been designed and does not imply a stock position.

EQUIVALENT SERIES RESISTANCE (E. S. R.)

| Frequency Range | MODE | E.S.R |
|------------------------|------|-------|
| 12 MHz ≤ Fo ≤ 13 MHz | A1 | <150Ω |
| 13 MHz < Fo ≤ 19.5 MHz | A1 | <80Ω |
| 19.5 MHz < Fo ≤ 27 MHz | A1 | <60Ω |
| 27 MHz < Fo ≤ 60 MHz | A1 | <50Ω |

FREQ. STABILITY vs. TEMP. RANGE

| Temp. (°C) | ppm | | |
|------------|-----|-----|-----|
| | ±5 | ±10 | ±15 |
| -10 ~ +60 | △ | ○ | ○ |
| -20 ~ +70 | X | ○ | ○ |
| -40 ~ +85 | X | X | △ |

FREQ. STABILITY vs. WIDE TEMP. RANGE

| Temp. (°C) | ppm | | | |
|------------|-----|-----|-----|-----|
| | ±15 | ±20 | ±30 | ±50 |
| -40 ~ +105 | △ | ○ | ○ | ○ |
| -40 ~ +125 | X | X | △ | ○ |

* ○: Available △:Conditional X: Not available

* ○: Available △:Conditional X: Not available

Note: not all combination of options are available. Other specifications may be available upon request.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Crystals category](#):

Click to view products by [TAITIEN manufacturer](#):

Other Similar products are found below :

[CS325S24000000ABJT](#) [718-13.2-1](#) [MC405 32.0000K-R3:PURE SN](#) [FC-135R 32.7680KF-A3](#) [7A-40.000MAAE-T](#) [7B-27.000MBBK-T](#)
[FL2000085](#) [9B-15.360MBBK-B](#) [9C-7.680MBBK-T](#) [ASH7K-32.768KHZ](#) [AT-41.600MAGQ-T](#) [BTD1062E05A-513](#) [LFXTAL066198Cutt](#)
[9C-14.31818MBBK-T](#) [FA-238 50.0000MB30X-K3](#) [FC-12M 32.7680KA-AC3](#) [SSPT7F-9PF20-R](#) [FX325BS-38.88EEM1201](#)
[LFXTAL065253Cutt](#) [LFXTAL066431Cutt](#) [XT9S20ANA14M7456](#) [XT9SNLANA16M](#) [646G-24-2](#) [7A-24.576MBBK-T](#) [7B-30.000MBBK-T](#)
[WX26-32.768K-6PF](#) [9B-14.31818MBBK-B](#) [CD1AM](#) [7B-25.000MAAE-T](#) [7A-14.31818MBBK-T](#) [6504-202-1501](#) [6526-202-1501](#) [FA-118T](#)
[27.1200MB50P-K0](#) [FC-135R 32.7680KA-A3](#) [ABM12-104-37.400MHZT](#) [ABLS-10.000MHZ-D3W-T](#) [BTJ112E01E-513](#) [BTJ722K01C-7067](#)
[BTL-20-513](#) [TSX-3225 24.0000MF15X-AC](#) [TSX-3225 16.0000MF18X-AC](#) [BTJ120E02C](#) [BTL-12-513](#) [7A-10.000MBBK-T](#) [7A-](#)
[11.0592MBBK-T](#) [ABM12-103-24.000MHZT](#) [CS325S25000000ABJT](#) [ABM3B-25.000MHZ-B2-X-T](#) [FC-135 32.7680KA-A5](#) [FX0800015](#)