

6A, 50V - 1000V Standard Bridge Rectifier

FEATURES

- AEC-Q101 qualified available
- Ideal for printed circuit board
- High case dielectric strength of 1500V_{RMS}
- High surge current capability
- Typical IR less than 0.1μA
- UL Recognized File # E-326243
- RoHS Compliant
- Halogen-free according to IEC 61249-2-21


APPLICATIONS

- Switching mode power supply (SMPS)
- Adapters
- Lighting application


MECHANICAL DATA

- Case: GBU
- Molding compound meets UL 94V-0 flammability rating
- Terminal: Matte tin plated leads, solderable per J-STD-002
- Mounting torque: 0.56 N·m maximum
- Polarity: As marked
- Weight: 4.00g (approximately)

| KEY PARAMETERS | | |
|--------------------|-----------|------|
| PARAMETER | VALUE | UNIT |
| I _F | 6 | A |
| V _{RRM} | 50 - 1000 | V |
| I _{FSM} | 175 | A |
| T _{J MAX} | 150 | °C |
| Package | GBU | |
| Configuration | Quad | |

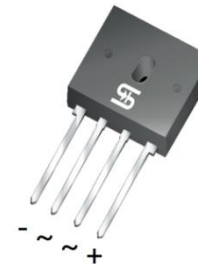

GBU

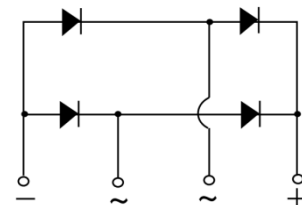

| ABSOLUTE MAXIMUM RATINGS (T _A = 25°C unless otherwise noted) | | | | | | | | | |
|--|---------------------|--------------|---------|---------|---------|---------|---------|---------|------------------|
| PARAMETER | SYMBOL | GBU 601 | GBU 602 | GBU 603 | GBU 604 | GBU 605 | GBU 606 | GBU 607 | UNIT |
| Marking code on the device | | GBU 601 | GBU 602 | GBU 603 | GBU 604 | GBU 605 | GBU 606 | GBU 607 | |
| Repetitive peak reverse voltage | V _{RRM} | 50 | 100 | 200 | 400 | 600 | 800 | 1000 | V |
| Reverse voltage, total rms value | V _{R(RMS)} | 35 | 70 | 140 | 280 | 420 | 560 | 700 | V |
| Forward current | I _F | 6 | | | | | | | A |
| Surge peak forward current, 8.3ms single half sine-wave superimposed on rated load | I _{FSM} | 175 | | | | | | | A |
| Rating for fusing (t<8.3ms) | I ² t | 127 | | | | | | | A ² s |
| Junction temperature | T _J | - 55 to +150 | | | | | | | °C |
| Storage temperature | T _{STG} | - 55 to +150 | | | | | | | °C |

| THERMAL PERFORMANCE | | | |
|--|-----------------|------------|-------------|
| PARAMETER | SYMBOL | TYP | UNIT |
| Junction-to-ambient thermal resistance | $R_{\theta JA}$ | 21 | °C/W |
| Junction-to-case thermal resistance | $R_{\theta JC}$ | 2 | °C/W |

| ELECTRICAL SPECIFICATIONS ($T_A = 25^\circ\text{C}$ unless otherwise noted) | | | | | | |
|---|--------------------------------------|---|---------------|------------|------------|---------------|
| PARAMETER | | CONDITIONS | SYMBOL | TYP | MAX | UNIT |
| Forward voltage per diode ⁽¹⁾ | | $I_F = 3\text{A}, T_J = 25^\circ\text{C}$ | V_F | - | 1.0 | V |
| | | $I_F = 6\text{A}, T_J = 25^\circ\text{C}$ | | - | 1.1 | V |
| Reverse current @ rated V_R per diode ⁽²⁾ | | $T_J = 25^\circ\text{C}$ | I_R | - | 5 | μA |
| | | $T_J = 125^\circ\text{C}$ | | - | 500 | μA |
| Junction capacitance per diode | GBU601 GBU602 GBU603 GBU604 | 1MHz, $V_R = 4.0\text{V}$ | C_J | 211 | - | pF |
| | GBU605 GBU606 GBU607 | | | 94 | - | pF |

Notes:

1. Pulse test with $PW = 0.3\text{ms}$
2. Pulse test with $PW = 30\text{ms}$

| ORDERING INFORMATION | | |
|--|----------------|----------------|
| ORDERING CODE ⁽¹⁾⁽²⁾ | PACKAGE | PACKING |
| GBU60x | GBU | 20 / Tube |
| GBU60xH | GBU | 20 / Tube |

Notes:

1. "x" defines voltage from 50V(GBU601) to 1000V(GBU607)
2. "H" means AEC-Q101 qualified

CHARACTERISTICS CURVES

($T_A = 25^\circ\text{C}$ unless otherwise noted)

Fig.1 Forward Current Derating Curve

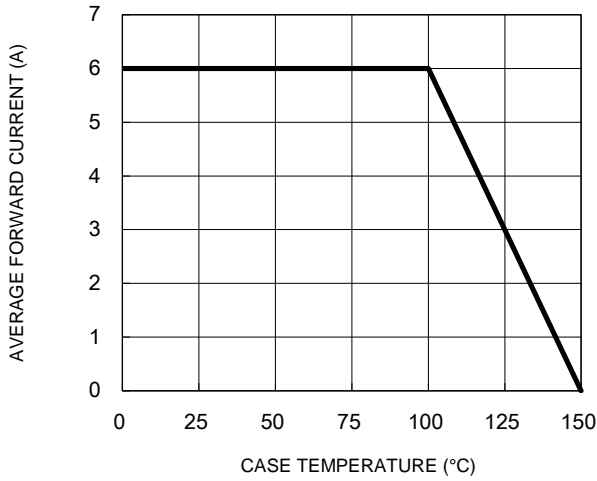


Fig.2 Typical Junction Capacitance

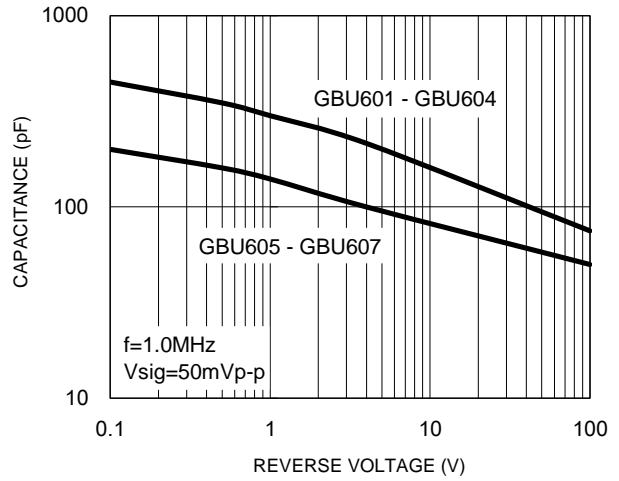


Fig.3 Typical Reverse Characteristics

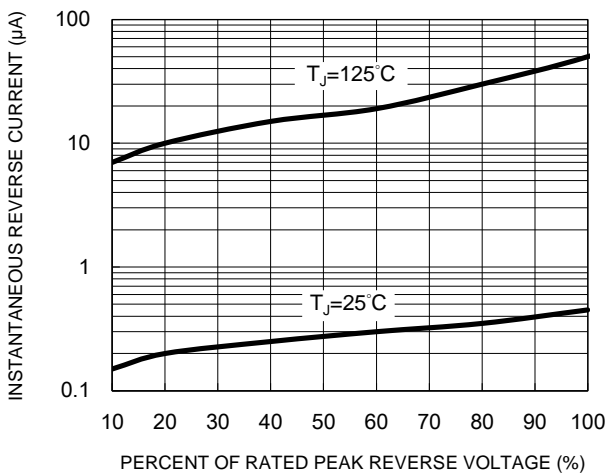


Fig.4 Typical Forward Characteristics



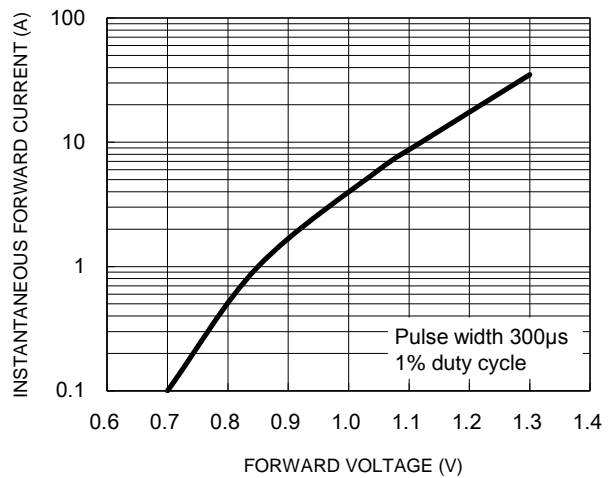


Fig.5 Maximum Non-Repetitive Forward Surge Current

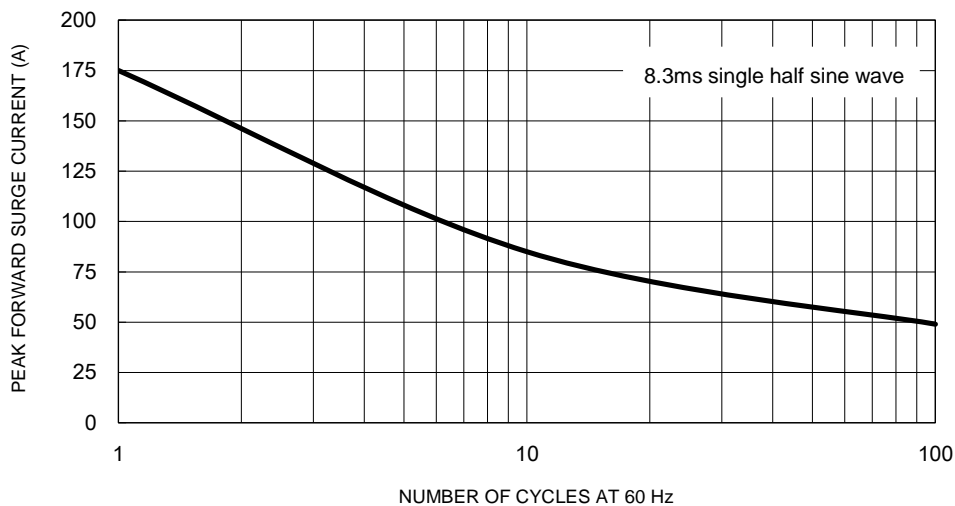

PACKAGE OUTLINE DIMENSIONS

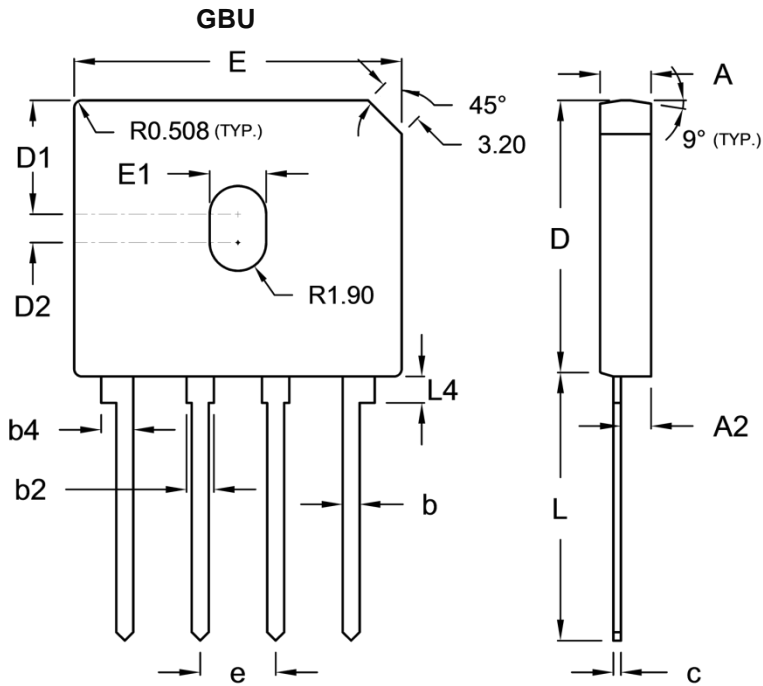

| DIM. | Unit (mm) | | Unit (inch) | |
|------|-----------|-------|-------------|-------|
| | Min. | Max. | Min. | Max. |
| A | 3.30 | 3.56 | 0.130 | 0.140 |
| A2 | 1.90 | 2.16 | 0.075 | 0.085 |
| b | 1.02 | 1.27 | 0.040 | 0.050 |
| b2 | 1.65 | 2.03 | 0.065 | 0.080 |
| b4 | 2.16 | 2.54 | 0.085 | 0.100 |
| c | 0.46 | 0.56 | 0.018 | 0.022 |
| D | 18.30 | 18.80 | 0.720 | 0.740 |
| D1 | 7.40 | 7.90 | 0.291 | 0.311 |
| D2 | 1.65 | 2.16 | 0.065 | 0.085 |
| E | 21.80 | 22.30 | 0.858 | 0.878 |
| E1 | 3.50 | 4.10 | 0.138 | 0.161 |
| e | 4.83 | 5.33 | 0.190 | 0.210 |
| L | 17.50 | 18.00 | 0.689 | 0.709 |
| L4 | 1.52 | 2.03 | 0.060 | 0.080 |

MARKING DIAGRAM



- P/N = Marking Code
- G = Green Compound
- YWW = Date Code
- F = Factory Code

Notice

Specifications of the products displayed herein are subject to change without notice. TSC or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Purchasers are solely responsible for the choice, selection, and use of TSC products and TSC assumes no liability for application assistance or the design of Purchasers' products.

Information contained herein is intended to provide a product description only. No license, express or implied, to any intellectual property rights is granted by this document. Except as provided in TSC's terms and conditions of sale for such products, TSC assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of TSC products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify TSC for any damages resulting from such improper use or sale.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Bridge Rectifiers](#) category:

Click to view products by [Taiwan Semiconductor](#) manufacturer:

Other Similar products are found below :

[MB2510](#) [MB252](#) [MB356G](#) [MB358G](#) [90MT160KPBF](#) [GBJ1504-BP](#) [GBU15J-BP](#) [GBU15K-BP](#) [GBU4A-BP](#) [GBU4D-BP](#) [GBU6B-E3/45](#)
[GSIB680-E3/45](#) [DB101-BP](#) [DF01](#) [DF10SA-E345](#) [KBPC50-10S](#) [RS405GL-BP](#) [G5SBA60-E3/51](#) [GBU10J-BP](#) [GBU6M](#) [GBU8D-BP](#)
[GBU8J-BP](#) [GSIB1520-E3/45](#) [2KBB10](#) [36MB140A](#) [TB102M](#) [MB1510](#) [MB258](#) [MB6M-G](#) [MB86](#) [TL401G](#) [MDA920A2](#) [TU602](#) [TU810](#)
[BR1005-BP](#) [BR101-BP](#) [BR84DTP204](#) [BU2008-E3/51](#) [36MB100A](#) [KBPC10/15/2501WP](#) [KBPC25-02](#) [VS-2KBB60](#) [DF06SA-E345](#)
[DF1510S](#) [VS-40MT160PAPBF](#) [W02M](#) [GBL02-E3/45](#) [GBU4G-BP](#) [GBJ2506-BP](#) [GBU6B-E3/51](#)