

Model

PAM250

250 Watts_{max} output power

Power Factor Correction

Single Output

Switch Mode Power Supply




Medical Grade
Certifications

H.A.L.T.
TESTED

Highly
Accelerated
Life
Testing

Electrical Specifications

Input Voltage:	85-132/180-264 VAC, 47-63 Hz, 1 phase
Input Current:	<6A RMS @ 115 VAC @ full load <3A RMS @ 230 VAC @ full load
Inrush Current:	<35A, pk @ 265 VAC @ cold start <75A, pk @ 132 VAC @ cold start
Harmonic Distortion:	Meets EN61000-3-2 for Class A
EMI Filtering:	Meets CISPR 11 and 22 and FCC Part 15 Class B (conducted)
Input Protection:	Internal AC line fuse; 250 VAC, 8A
Output Power:	250W with 25CFM air; 130W Convection
Line Regulation:	± 0.3%
Load Regulation:	± 0.5%
PARD:	<1% or 50mV; 20MHz bandwidth
Hold-up Time:	16 ms @ full load (120 VAC)
Output Polarity:	Output is floating
Minimum Load:	0% of rated load
Transient Response:	3% for 25% load change @ 1A/μs; 50% duty cycle 50/60 Hz
Output Rise Time:	<100 ms (10% to 90%)
Current Limit:	105-130% of rated current; Hiccup
Remote Sense:	Compensates for up to 250mV of total cable drop
Remote On/Off:	Optional
Leakage Current:	< 300 μA

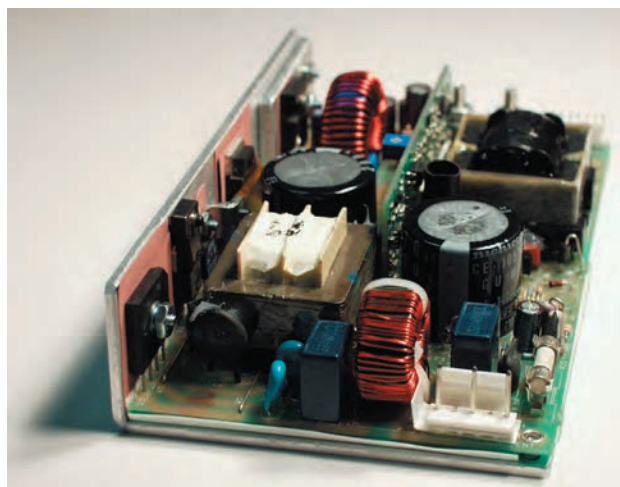

Thermal Shutdown	Standard
DC OK:	Standard; Open Collector
Turn-on Delay:	<1 second after application of AC Input
Stability:	<0.1% for 8 hours after 1/2-hour warm up
Isolation:	>20 MΩ @ 100 VDC between output terminals and chassis ground
AC Power Fail:	TTL _{LOW} logic "0" at least 2 ms before output drops 5%; Open collector
Oversvoltage Protect:	Factory set, 125% ±5%, cycle AC to reset
Reverse Voltage:	Output has reverse voltage protection; Reverse current limited to 100% of output rating
Efficiency:	Up to 85%
MTBF:	MIL-STD-HDBK 217E >200,000 hours @ 25°C Highly Accelerated Life Testing

Available Voltage Outputs*

Voltage Codes	Voltages (Volts)	Continuous Current (Amps)
-4	12.0	21
-5	15.0	17
-6	24.0	10.5
-7	28.0	9.0
-8	36.0	7.2
-9	48.0	5.5

* Consult factory for other voltages and OEM quantities.

Note: Standard models are shown **bold**

PART # STRUCTURE:

MODEL - VOLTAGE CODE - OPTION CODES (back)
 - V1 -
PAM250 - **X** - **ABC....**

Example: Part Number **PAM250-6-OR**= 250W Power Factor Corrected, 24V @ 10.5A with an OR-ring Diode and Remote On/Off.
 See 3rd page for PAM250 CODE TABLE AND AVAILABLE OPTIONS.

Model

PAM250

Options (code)

- | | |
|---|------------------------------------|
| 12V@0.5A Aux./Fan Drive (A) | Droop Current Share $\pm 10\%$ (B) |
| Fan Assembly (C) | DC OK Invert (E) |
| PF Invert (F) | Field-Configurable (G) |
| Single Wire Current Share $\pm 5\%$ (I) | Square Current Limit (J) |
| Molex Connector (K) | Metric Mounting (M) |
| OR-ing Diode (O) | Remote On/Off (R) |
| Remote On/Off Invert (S) | |

GUZym7 ca d'JubWV

Recognition to UL60601-1
 CSA C22.2 No. 601.1
 BAUART Certification to EN60601-1
 CB Test Report in Accordance with IEC60601-1
 CE Declaration to Low Voltage Directive 2006/95/EC




Surge & ESD Test Levels

- | | |
|---|--------------------------------|
| EN61000-4-5 Level 3 | EN61000-4-2 Level 2 |
| EN61000-3-2 for Class A | EN61000-4-2 Level 3 (Air Only) |
| EN61000-4-4 Level 3 | EN61000-4-11 |
| CISPR 11 and 22 FCC Part 15 Class B (conducted) | |

Physical Specifications

- | | |
|---------------------|---|
| Dimensions: (HxWxL) | 1.5" x 4.0" x 7" |
| Operating Temp: | 0 to 70°C; rated power to 50°C
derate linearly to 50% at 70°C. |
| Relative Humidity: | 5% to 90%, non-condensing |
| Storage: | -50 to 85°C/20-90% RH |
| Altitude: | 6561
40,000' storage |

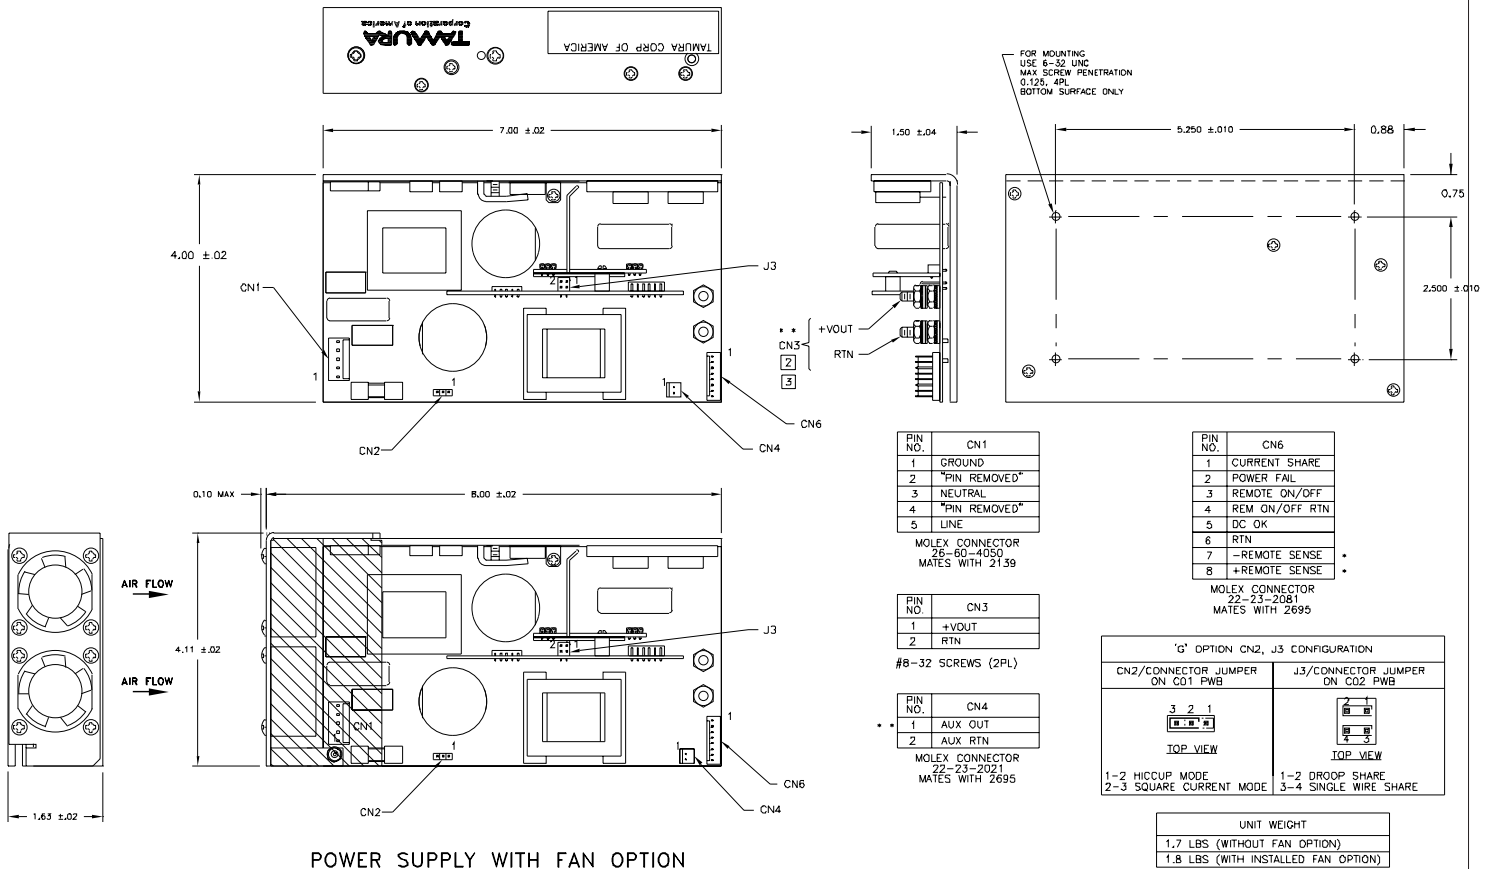

3 OPTIONAL—MOLEX CONNECTOR (OPTION 'K'—LIMITED TO 7A) MAY BE SPECIFIED FOR CN3 INSTEAD OF STANDARD OUTPUT STUDS.
 2 DO NOT EXCEED 17 INCH-LBS (MAX TORQUE) WHEN TIGHTENING TOP NUTS ON OUTPUT STUDS.
 1. FOR CLARITY NOT ALL ITEMS ARE SHOWN IN EACH VIEW.

* **WARNING:** DAMAGE WILL OCCUR IF REMOTE SENSE LEADS (CN6-7 & CN6-8) ARE REVERSED OR USED WITH LOAD DISCONNECTED FROM OUTPUT (CN3).
 ** **NOTE:** FOR PROPER REGULATION OF AUXILIARY OUTPUT, APPLY AT LEAST 10% OF RATED LOAD TO VOUT.

© Copyright 2011 TAMURA CORPORATION OF AMERICA. Specifications subject to change without notice.



TAMURA CORPORATION OF AMERICA
 1040 South Andreasen Drive, STE. 100 Escondido, CA 92029-1951
 (951) 699-1270 / Fax: (951) 676-9482
(800) 472-6624 www.tamuracorp.com



PAM250 Series Power Supply

Standard Models
PAS250-X-Y₁ ... Y_n

Tailored Models
PAS250-60ZZZ

Custom Models
PAS250-61ZZZ

	Voltage and Current Ratings		Standard Options
X Codes	Volts	Amps	Y Code Descriptions
1	Not Available		A 12Vdc, 0.5A Auxiliary Output** B Droop Share* C Fan Assembly** E DCOK Invert F PF Invert G Field configurable options – B, I, and J I Single Wire Share* J Square Current Limit K Molex Connector, 7A max. (#8 stud standard) M Metric Mounting O ORing Diode R Remote On/Off (closed is OFF) S Remote On/Off Invert (open is OFF) *Includes Option J **Options A and C are not available together
2	Not Available		
3	Not Available		
4	12.0	21.0	
5	15.0	17.0	
6	24.0	10.5	
7	28.0	9.0	
8	36.0	7.2	
9	48.0	5.5	
			Tailored Units (no safety changes)
			60ZZZ, where ZZZ = Factory Assigned Number Harnesses Added, Special test data, Etc.
			Custom Units (safety critical changes)
			61ZZZ, where ZZZ = Factory Assigned Number

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Switching Power Supplies](#) category:

Click to view products by [Tamura](#) manufacturer:

Other Similar products are found below :

[70841011](#) [73-551-0005](#) [73-551-0048](#) [PS3E-B12F](#) [PS3E-E12F](#) [AAD600S-4-OP](#) [R22095](#) [KD0204](#) [9021](#) [LDIN100150](#) [LPM000-BBAR-01](#)
[LPX17S-C](#) [EVS57-10R6/R](#) [FP80](#) [FRV7000G](#) [22929](#) [PS3E-F12F](#) [CQM1IA121](#) [40370121900](#) [VI-PU22-EXX](#) [40370121910](#) [LDIN5075](#)
[LPM615-CHAS](#) [LPX140-C](#) [09-160CFG](#) [70841025](#) [VPX3000-CBL-DC](#) [LPM000-BBAR-05](#) [LPM000-BBAR-08](#) [LPM124-OUTA1-48](#)
[LPM000-BBAR-07](#) [LPM109-OUTA1-10](#) [LPM616-CHAS](#) [08-30466-1055G](#) [08-30466-2175G](#) [08-30466-2125G](#) [DMB-EWG](#) [TVQF-1219-](#)
[18S](#) [6504-226-2101](#) [CQM1IPS01](#) [SP-300-5](#) [CQM1-IPS02](#) [VI-MUL-ES](#) [22829](#) [08-30466-0065G](#) [VI-RU031-EWWX](#) [08-30466-0028G](#) [VI-](#)
[LUL-EU](#) [EP3000AC48INZ](#) [VP-C2104853](#)