


**Component
Image & Dimension**

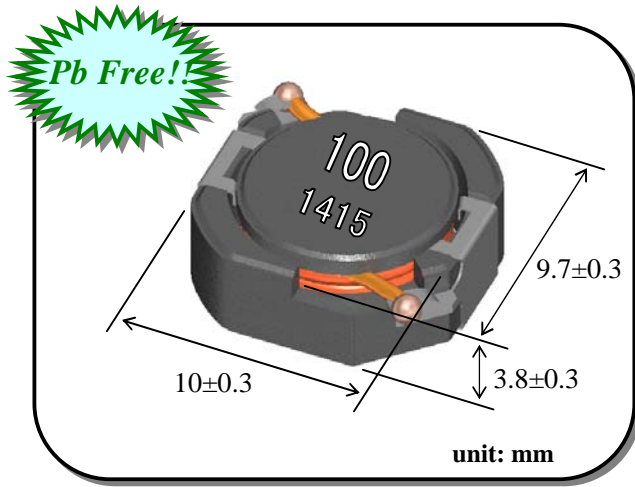


Features :

- a) Miniature Size :
Mount Area : 9.7mm x 10mm
Low Profile : 4.1mm Max. Height
- b) Tough Design
Generic use for Automotive Appliance.
Heat and vibration, mechanical shock resistance ability can endure an automobile use.
Operation temperature ; -40°C ~ +125°C
(Including self-temperature rise)
Storage temperature ; -40°C ~ +125°C
- c) High Magnetic Shield Construction should actualize High Resolution for EMC Protection.
- d) Automatic Mounting in Tape & Reel Package.

Applications :

Automotive Appliance (ECM, HID, Air Bag, Transmission Control, Car Navigation, Car Audio, GPS System) etc.

*Recommended Land Pattern (Unit : mm)



Electrical Specification (Ref.)

TDK-EPC Identification	Inductance		Test Freq. (kHz)	DC Resistance		Rated DC Current	
	Spec. (uH)	Tol. (+/-%)		Spec. (Ohm.)	Tol. (+/-%)	Idc 1 (A)	Idc 2 (A)
CLF10040T- 1R0N-H	1.0	+/-30%	100	5.7m	+/-30%	12.0	6.3
CLF10040T- 1R5N-H	1.5	+/-30%	100	7.1m	+/-30%	10.6	5.8
CLF10040T- 2R2N-H	2.2	+/-30%	100	9.7m	+/-30%	7.5	5.0
CLF10040T- 3R3N-H	3.3	+/-30%	100	11.0m	+/-30%	6.6	4.8
CLF10040T- 4R7N-H	4.7	+/-30%	100	14.5m	+/-30%	5.4	4.2
CLF10040T- 6R8N-H	6.8	+/-30%	100	18.5m	+/-30%	4.8	3.7
CLF10040T- 100M-H	10	+/-20%	100	26m	+/-20%	4.0	3.3
CLF10040T- 150M-H	15	+/-20%	100	40m	+/-20%	3.2	2.5
CLF10040T- 220M-H	22	+/-20%	100	55m	+/-20%	2.7	2.2
CLF10040T- 330M-H	33	+/-20%	100	80m	+/-20%	2.2	1.7
CLF10040T- 470M-H	47	+/-20%	100	125m	+/-20%	1.9	1.3
CLF10040T- 680M-H	68	+/-20%	100	180m	+/-20%	1.6	1.1
CLF10040T- 101M-H	100	+/-20%	100	0.24	+/-20%	1.3	1.0
CLF10040T- 151M-H	150	+/-20%	100	0.38	+/-20%	1.0	0.8
CLF10040T- 221M-H	220	+/-20%	100	0.52	+/-20%	0.88	0.70
CLF10040T- 331M-H	330	+/-20%	100	0.86	+/-20%	0.70	0.53
CLF10040T- 471M-H	470	+/-20%	100	1.21	+/-20%	0.56	0.44

Note) Idc 1 : Depend on the Inductance Saturation. (-10% Saturation from Initial L Value)
Idc 2 : Depend on the self temperature rise. (+30 degC typ.)

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Fixed Inductors](#) category:

Click to view products by [TDK](#) manufacturer:

Other Similar products are found below :

[CR32NP-100KC](#) [CR43NP-680KC](#) [CR54NP-820KC](#) [CR54NP-8R5MC](#) [CTX32CT-100](#) [70F224AI](#) [MGDQ4-00004-P](#) [MHL1ECTTP18NJ](#)
[MHL1JCTTD12NJ](#) [PE-51506NL](#) [PE-53601NL](#) [PE-53602NL](#) [PE-53630NL](#) [PE-53824SNLT](#) [PE-62892NL](#) [PE-92100NL](#) [PG0434.801NLT](#)
[PG0936.113NLT](#) [9310-16](#) [PM06-2N7](#) [PM06-39NJ](#) [A01TK](#) [1206CS-471XJ](#) [HC2-2R2TR](#) [HC2LP-R47-R](#) [HC3-2R2-R](#) [1206CS-151XG](#)
[RCH664NP-140L](#) [RCH664NP-4R7M](#) [RCH8011NP-221L](#) [RCP1317NP-332L](#) [RCP1317NP-391L](#) [RCR1010NP-470M](#) [RCR110DNP-331L](#)
[DH2280-4R7M](#) [DS1608C-106](#) [ASPI-4020HI-R10M-T](#) [B10TJ](#) [B82477P4333M](#) [B82498B3101J000](#) [B82498B3680J000](#) [ELJ-RE27NJF2](#)
[1812CS-153XJ](#) [1812CS-183XJ](#) [1812CS-223XJ](#) [1812LS-104XJ](#) [1812LS-105XJ](#) [1812LS-124XJ](#) [1812LS-154XJ](#) [1812LS-223XJ](#)