


1.2 - 2.5A Point of Load Converter

Features

- ◆ 9 to 26.4V Input
- ◆ 3.3 to 12.6V Outputs
- ◆ Surface Mount
- ◆ Low 5.5mm Profile
- ◆ Non Isolated Output
- ◆ Wide range output
- ◆ Constant switching frequency
- ◆ Five sided shielding

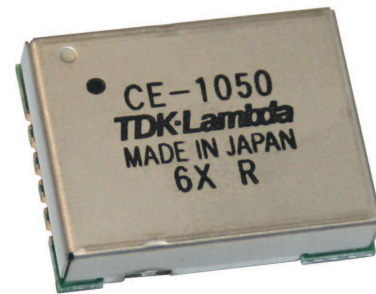

Specifications

Model		CE-1050
Nominal Output Voltage	(1) VDC	+3.3 to +12.6
Input Voltage Range	VDC	9 - 26.4
Input Current (max)	A	1.8
Output Voltage Tolerance	%	N/A
Ripple & Noise (typ) (pk - pk)	mV	50 (18V input, 5V 2.5A output)
Total Regulation (typ)	mV	Vout=3.3 to 5.0:±3.5%; Vout ≥ 5.0: ±5%
Overload Protection (typ)	A	3.5
Overvoltage Protection	-	None
Remote Sense	-	None
Remote On / Off	-	Voltage on pin 5: ON = 3 - 6V; OFF= 0 - 0.6V
Sequencing	-	None
Temperature (operating)	°C	-20 to +85°C
Temperature (storage)	°C	-20 to +85°C
Humidity (operating)	-	10-90% RH Non condensing @ max temp 38°C
Humidity (storage)	-	Sealed packaging, see Technical Download
Cooling	-	Convection or forced air
Isolation Voltage	VDC	N/A
Vibration (non operating)	-	Frequency: 10-2000Hz, Sweep time: 4 minutes per cycle Amplitude: 10G, 30 minutes each x, y, and z direction
Shock	-	Peak Acceleration: 100G, Duration: 6msec; three times each axis
Safety Agency Approvals	-	N/A
Weight (max)	g	3.7
Size	mm	21.3 x 16.4 x 5.5
Warranty	-	1 year


Notes:

(1) Input / output voltage differential must ≥ 4V.


OBSOLETE

Derating Curves


Vout=3.3V

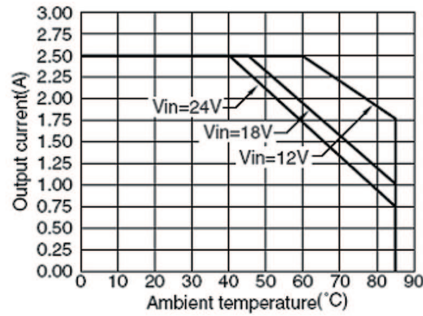


Vout=9.0V

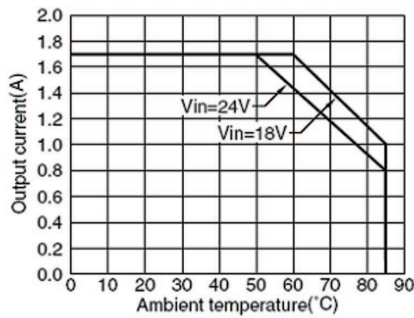

Vout=5.0V

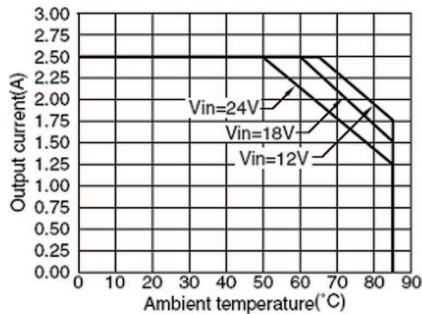


Vout=12V

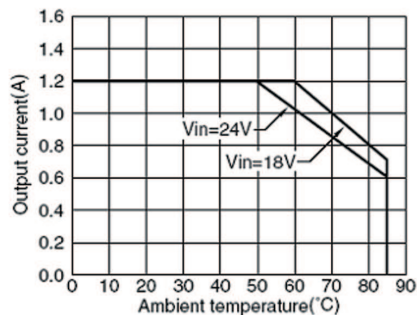

Model Selector

Model	Output ¹ Voltage (V)	Output ¹ Adjust (V)	Output Current (A)	Efficiency (typ)
CE-1050	3.3 - 12.6V	3.3 - 12.6V	see curves	90%

Outline Drawing

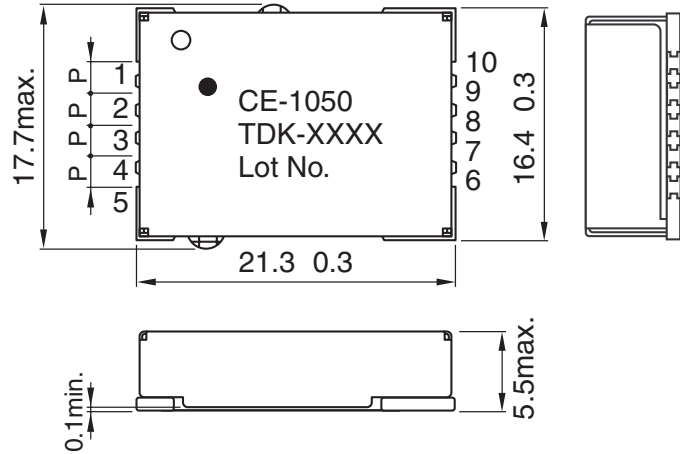

Pinout

Pin	Function	Description
1	Vin	+V input
2	Vin	+V input
3	GND	-V input
4	GND	-V input
5	On / Off	Remote On/Off
6	GND	-V output
7	GND	-V output
8	Vset	Output trim
9	Vout	+V output
10	Vout	+V output

Options

Suffix	Options
Blank	Tray package
-TP	Tape and reel (400 per reel)

For Additional Information, please visit us.tdk-lambda.com/lp/products/ce-series.htm



OBSOLETE

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Isolated DC/DC Converters](#) category:

Click to view products by [TDK-Lambda](#) manufacturer:

Other Similar products are found below :

[ESM6D044440C05AAQ](#) [FMD15.24G](#) [PSL486-7LR](#) [PSR152.5-7IR](#) [Q48T30020-NBB0](#) [AVO240-48S12B-6L](#) [AVO250-48S28B-6L](#) [NAN-0505](#) [HW-L16D](#) [JAHW100Y1](#) [217-1617-001](#) [22827](#) [SPB05C-12](#) [SQ24S15033-PS0S](#) [18952](#) [19-130041](#) [CE-1003](#) [CE-1004](#) [GQ2541-7R](#) [PSE1000DCDC-12V](#) [RDS180245](#) [MAU228](#) [419-2065-201](#) [449-2075-101](#) [J80-0041NL](#) [V300C24C150BG](#) [419-2062-200](#) [419-2063-401](#) [419-2067-101](#) [419-2067-501](#) [419-2068-001](#) [DCG40-5G](#) [DFC15U48D15](#) [449-2067-000](#) [XGS-0512](#) [XGS-1205](#) [XGS-1212](#) [XGS-2412](#) [XGS-2415](#) [XKS-1215](#) [033456](#) [NCT1000N040R050B](#) [SPB05B-15](#) [SPB05C-15](#) [SSQE48T25025-NAA0G](#) [L-DA20](#) [HP3040-9RG](#) [HP1001-9RTG](#) [XKS-2415](#) [XKS-2412](#)