


132-204W Quarter Brick Converter

Features

- ◆ Standard Quarter Brick Footprint
- ◆ 18-60V, 36-75VDC Inputs
- ◆ 5V 30A - 15V 10A Nominal Outputs
- ◆ Through Hole Mounting
- ◆ Low 10.41mm Profile
- ◆ 1500VDC Basic Isolation
- ◆ High operating efficiency (>90%)
- ◆ Constant switching frequency
- ◆ Low component count

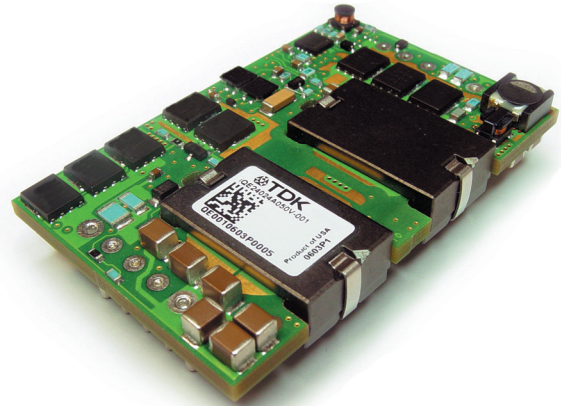

Key Market Segments & Applications



Specifications		iQE		
Model		5	12	15
Nominal Output Voltage	VDC	5	12	15
Input Voltage Range	VDC	See Model Selector		
Input Current (max)	A	10		
Efficiency	-	Typically 90% at full load		
Output Voltage Tolerance	VDC	4.85 - 5.15	11.58 - 12.42	14.48 - 15.52
Ripple & Noise (max)(pk to pk) (1)	mV	150	150	150
Line Regulation (max)	mV	15	30	30
Load Regulation (max)	mV	30	30	30
Overload Protection (typ)	%	Inception- 133-158% of rated output; Short circuit - auto recovery		
Overvoltage Protection	VDC	5.7 - 6.7	13.6 - 16.5	16.7 - 21
Remote Sense	-	Yes		
Remote On / Off	-	Positive or Negative Logic available, see Model Selector		
Temperature (operating)	°C	-40 to 125		
Temperature (storage)	°C	-55 to 125		
Humidity (operating)	-	20-95% RH Non condensing		
Humidity (storage)	-	10-95% RH Non condensing		
Cooling	-	Convection or forced air		
Isolation Voltage	VDC	1500		
Vibration (non operating)	-	5 to 50Hz @ 0.5g (4.9m/s ²), and 50 to 500Hz @ 1.5g (14.7m/s ²) per Bellcore TR-EOP-000063-5.4.4		
Shock	-	196.1m/s ²		
Safety Agency Approvals	-	IEC/UL/CSA/EN62368-1, 60950-1, CE Mark		
Weight (max)	g	50		
Size	mm	57.9 x 36.8 x 10.41		
Warranty	-	3 Years		

Notes: See website for detailed specifications

- (1) Measured across one 22 μ F and one 0.1 μ F ceramic capacitor;
BW = 20MHz


Model Selector

Model	Input Voltage (V)	Output Voltage (V)	Adjust Range (V)	Max. Curr. (A)	Max. Output Power (W)	On/Off Polarity	Pin Length
iQE48030A050V-000-R	36 - 75	5	4.5 - 5.5	30	150	Pos	0.145
iQE48030A050V-001-R	36 - 75	5	4.5 - 5.5	30	150	Neg	0.145
iQE4W011A120V-001-R	18 - 60	12	10.8 - 13.2	11	132	Neg	0.145
iQE48017A120V-000-R	36 - 75	12	10.8 - 13.2	17	204	Pos	0.145
iQE48017A120V-001-R	36 - 75	12	10.8 - 13.2	17	204	Neg	0.145
iQE48017A120V-007-R	36 - 75	12	10.8 - 13.2	17	204	Neg	0.180
iQE48010A150V-001-R	36 - 75	15	13.5 - 16.5	10	150	Neg	0.145
iQE48010A150V-007-R	36 - 75	15	13.5 - 16.5	10	150	Neg	0.180

Preferred Model

Other models available for volume opportunities. Contact factory.

Recommended Footprint (Top View)

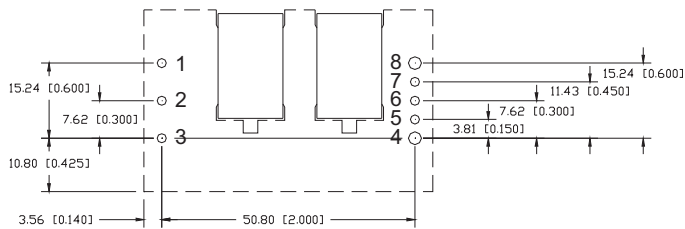

Pinout

PIN	Function
1	Vin (+)
2	On / Off
3	Vin (-)
4	Vout (-)
5	Sense (-)
6	Trim
7	Sense (+)
8	Vout (+)

For Additional Information, please visit
<https://product.tdk.com/en/power/>



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Isolated DC/DC Converters](#) category:

Click to view products by [TDK-Lambda](#) manufacturer:

Other Similar products are found below :

[ESM6D044440C05AAQ](#) [FMD15.24G](#) [PSL486-7LR](#) [Q48T30020-NBB0](#) [JAHW100Y1](#) [SPB05C-12](#) [SQ24S15033-PS0S](#) [18952](#) [19-130041](#)
[CE-1003](#) [CE-1004](#) [GQ2541-7R](#) [RDS180245](#) [MAU228](#) [J80-0041NL](#) [DFC15U48D15](#) [XGS-0512](#) [XGS-1205](#) [XGS-1212](#) [XGS-2412](#) [XGS-](#)
[2415](#) [XKS-1215](#) [06322](#) [NCT1000N040R050B](#) [SPB05B-15](#) [SPB05C-15](#) [L-DA20](#) [DCG40-5G](#) [QME48T40033-PGB0](#) [XKS-2415](#) [XKS-2412](#)
[XKS-2405](#) [XKS-1212](#) [XKS-1205](#) [XKS-0515](#) [XKS-0505](#) [XGS-2405](#) [XGS-1215](#) [XGS-0515](#) [PS9Z-6RM4](#) [73-551-5038I](#) [AK1601-9RT](#) [VI-](#)
[R5022-EXWW](#) [PSC128-7iR](#) [RPS8-350ATX-XE](#) [DAS1004812](#) [VI-LJ11-iz](#) [PQA30-D24-S24-DH](#) [VI-M5F-CQ](#) [VI-LN2-EW](#)