


## High Efficiency Eighth Brick DC-DC Converters

### Features

- ◆ Industry Standard Package and Pin Out
- ◆ Output Currents up to 30 Amps
- ◆ Designed for Telecom Standards
- ◆ Output Voltage Adjustment
- ◆ Remote On / Off
- ◆ High Efficiency
- ◆ Same Pinout as Quarter Bricks
- ◆ Meets Basic Isolation

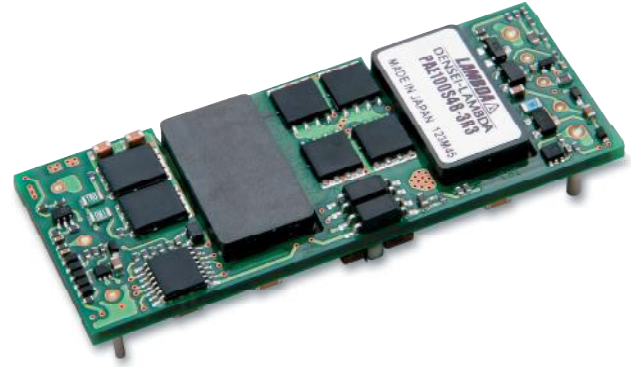

### Key Market Segments & Applications



Specifications			PAE50S48-1R8	PAE50S48-2R5	PAE50S48-3R3	PAE50S48-5
Model			PAE100S48-1R8	PAE100S48-2R5	PAE100S48-3R3	PAE100S48-5
Nominal Output Voltage			1.8	2.5	3.3	5
Input Voltage Range	VDC		36-76			
Output Voltage Accuracy	%		±1			
Max Ripple & Noise	mV		100			
Max Line Regulation	mV		10			
Max Load Regulation	mV		10			
Overcurrent Protection (1)	-		PAE50 models 105% - 150%, PAE100 models 105% - 140%			
Overvoltage Protection (max) (2)	-		115% - 135%			120%-140%
Remote Sense	-		Yes			
Remote On / Off	-		Yes (open = off; short to 0V = on)			
Operating Temperature	-		-40°C to +85°C (See website for derating)			
Operating Humidity	-		5 - 95% RH (non-condensing)			
Storage Temperature	-		-40°C to +100°C			
Storage Humidity	-		5 - 95% RH (non-condensing)			
Cooling	-		Convection or Forced Air			
I/O Isolation Voltage	-		Input to Output 1500VDC			
Vibration (non operating)	-		10 - 55Hz (1 minute), Amplitude 0.825mm (49m/s <sup>2</sup> max) X, Y, Z 1 hour			
Shock	-		< 196.1 m/s <sup>2</sup>			
Safety Agency Approvals	-		IEC/EN/UL/CSA60950-1, IEC/EN/UL/CSA62368-1 and CE Mark			
Weight (Typ)	g		25			
Size (WxHxD)	mm		22.76 X 8.5 X 57.9 (See Outline Drawing)			
Warranty	yrs		Two Years			


Notes:

- (1) Converter shut down, auto restart
- (2) Auto restart on /V models


## PAE Models

Models	Voltage (V)	Adjust Range	Max. Curr. (A)	Max. Output Power (W)	Efficiency at Full Load (%)	Input Curr. (A)
PAE50S48-1R8/V	1.8	1.44 - 1.98	20	36.0	87	0.87
PAE100S48-1R8/V	1.8	1.44 - 1.98	30	54.0	87	1.30
PAE50S48-2R5/V	2.5	2.00 - 2.75	18	45.0	89	1.06
PAE100S48-2R5/V	2.5	2.00 - 2.75	25	62.5	89	1.47
PAE50S48-3R3/V	3.3	2.64 - 3.63	16	52.8	90	1.23
PAE100S48-3R3/V	3.3	2.64 - 3.63	25	82.5	90	1.91
PAE50S48-5/V	5.0	4.25 - 5.75	10	50.0	90	1.16
PAE100S48-5/V	5.0	4.25 - 5.75	20	100.0	90	2.32

## Outline Drawing

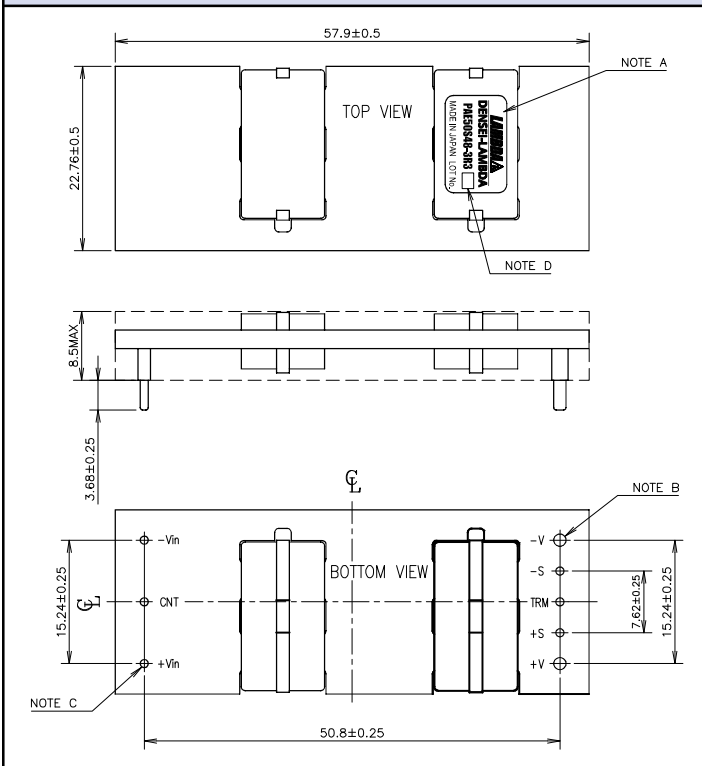

## Derating Curve

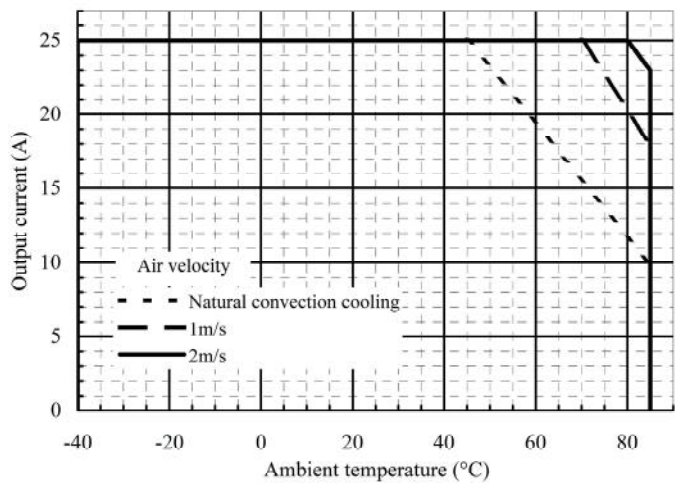

## Other DC-DC Products

PX	10-40W, 12-48V I/P DC-DC
CC-E	1.5-25W, 5V, 12V, 24V & 48V I/P DC-DC
PAQ, PAH, PAF	50-700W quarter, half & full bricks

For Additional Information, please visit  
<https://product.tdk.com/info/en/products/power/index.html>



## Options

Suffix	Description
Blank	Manual Reset
/V	Auto Reset (Preferred)

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Isolated DC/DC Converters](#) category:*

*Click to view products by [TDK-Lambda](#) manufacturer:*

Other Similar products are found below :

[ESM6D044440C05AAQ](#) [FMD15.24G](#) [PSL486-7LR](#) [Q48T30020-NBB0](#) [JAHW100Y1](#) [SPB05C-12](#) [SQ24S15033-PS0S](#) [18952](#) [19-130041](#)  
[CE-1003](#) [CE-1004](#) [GQ2541-7R](#) [RDS180245](#) [MAU228](#) [J80-0041NL](#) [DFC15U48D15](#) [XGS-0512](#) [XGS-1205](#) [XGS-1212](#) [XGS-2412](#) [XGS-2415](#) [XKS-1215](#) [06322](#) [NCT1000N040R050B](#) [SPB05B-15](#) [SPB05C-15](#) [L-DA20](#) [DCG40-5G](#) [QME48T40033-PGB0](#) [XKS-2415](#) [XKS-2412](#)  
[XKS-1212](#) [XKS-1205](#) [XKS-0515](#) [XKS-0505](#) [XGS-2405](#) [XGS-1215](#) [XGS-0515](#) [PS9Z-6RM4](#) [73-551-5038I](#) [AK1601-9RT](#) [VI-N61-CM](#) [VI-R5022-EXWW](#) [PSC128-7iR](#) [RPS8-350ATX-XE](#) [DAS1004812](#) [PQA30-D24-S24-DH](#) [VI-M5F-CQ](#) [VI-LN2-EW](#) [VI-PJW01-CZY](#)