

### Features

- Protects one data or power line
- Ultra low leakage: nA level
- Low operating voltage: 5V
- Low clamping voltage
- Complies with following standards:
  - IEC 61000-4-
    - Air discharge:  $\pm 15\text{kV}$
    - Contact discharge:  $\pm 8\text{kV}$
  - IEC61000-4-4 (EFT) 40A (5/50ns)
- RoHS Compliant

### Mechanical Characteristics

- Package: SOD-523
- Lead Finish: Matte Tin
- Case Material: “Green” Molding Compound.
- UL Flammability Classification Rating 94V-0
- Moisture Sensitivity: Level 3 per J-STD-020
- Terminal Connections: See Diagram Below


### Applications

- Cellular Handsets and Accessories
- Personal Digital Assistants
- Notebooks and Handhelds
- Portable Instrumentation
- Digital Cameras
- Peripherals
- Audio Players
- Keypads, Side Keys, LCD Displays, USB2.0

### Ordering Information

| Part Number  | Qty per Reel | Reel Size |
|--------------|--------------|-----------|
| ESD5V0B3-523 | 3000         | 7"        |

### Dimensions and Pin Configuration

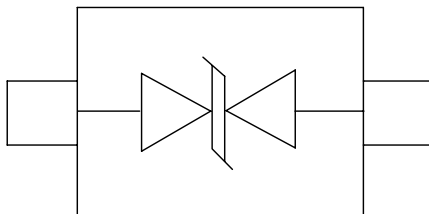


**Absolute Maximum Ratings ( $T_A=25^\circ\text{C}$  unless otherwise specified)**

| Parameter                       | Symbol | Value       | Unit             |
|---------------------------------|--------|-------------|------------------|
| ESD per IEC 61000-4-2 (Air)     | VESD   | $\pm 15$    | kV               |
| ESD per IEC 61000-4-2 (Contact) |        | $\pm 8$     |                  |
| Operating Temperature Range     | TJ     | -55 to +125 | $^\circ\text{C}$ |
| Storage Temperature Range       | Tstg   | -55 to +150 | $^\circ\text{C}$ |


**Electrical Characteristics ( $T_A=25^\circ\text{C}$  unless otherwise specified)**

| Symbol    | Parameter                                   |
|-----------|---------------------------------------------|
| $I_{PP}$  | Maximum Reverse Peak Pulse Current          |
| $V_C$     | Clamping Voltage @ $I_{PP}$                 |
| $V_{RWM}$ | Working Peak Reverse Voltage                |
| $I_R$     | Maximum Reverse Leakage Current @ $V_{RWM}$ |
| $V_{BR}$  | Breakdown Voltage @ $I_T$                   |
| $I_T$     | Test Current                                |
| $I_F$     | Forward Current                             |
| $V_F$     | Forward Voltage @ $I_F$                     |
| $P_{pk}$  | Peak Power Dissipation                      |
| C         | Capacitance @ $V_R = 0$ and $f = 1.0$ MHz   |

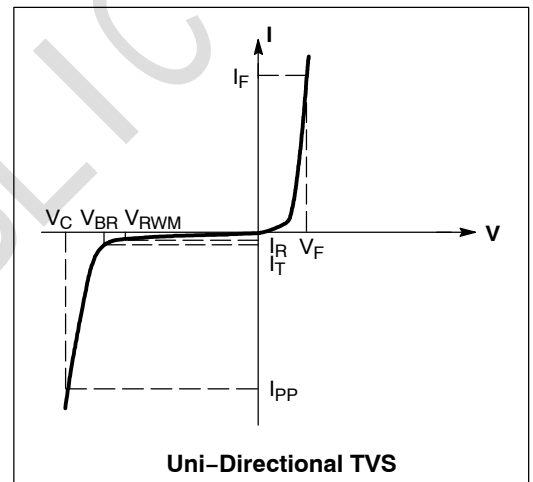


| Parameter               | Symbol    | Min | Typ | Max | Unit | Test Condition                                    |
|-------------------------|-----------|-----|-----|-----|------|---------------------------------------------------|
| Reverse Working Voltage | $V_{RWM}$ |     |     | 5   | V    |                                                   |
| Breakdown Voltage       | $V_{BR}$  | 6   |     |     | V    | $I_T = 1\text{mA}$                                |
| Reverse Leakage Current | $I_R$     |     |     | 200 | nA   | $V_{RWM} = 5\text{V}$                             |
| Clamping Voltage        | $V_C$     |     |     | 10  | V    | $I_{PP} = 1\text{A}$ (8 x 20 $\mu\text{s}$ pulse) |
| Junction Capacitance    | $C_J$     |     | 2.5 | 3   | pF   | $V_R = 0\text{V}$ , $f = 1\text{MHz}$             |


**Typical Performance Characteristics ( $T_A=25^{\circ}\text{C}$  unless otherwise Specified)**

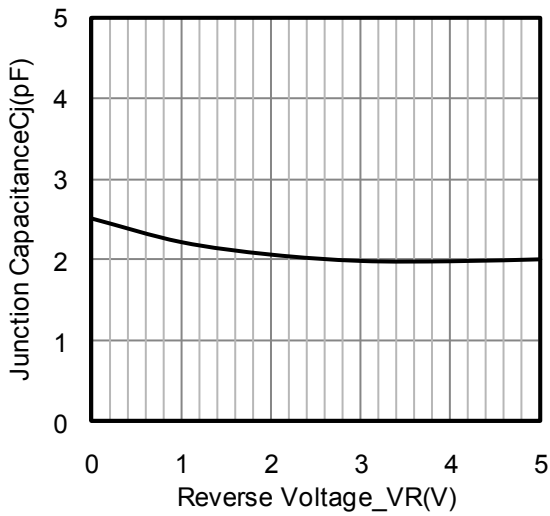


**Junction Capacitance vs. Reverse Voltage**

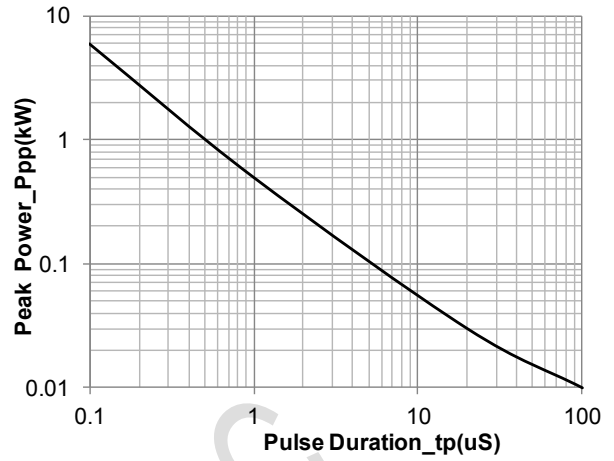


**Peak Pulse Power vs. Pulse Time**

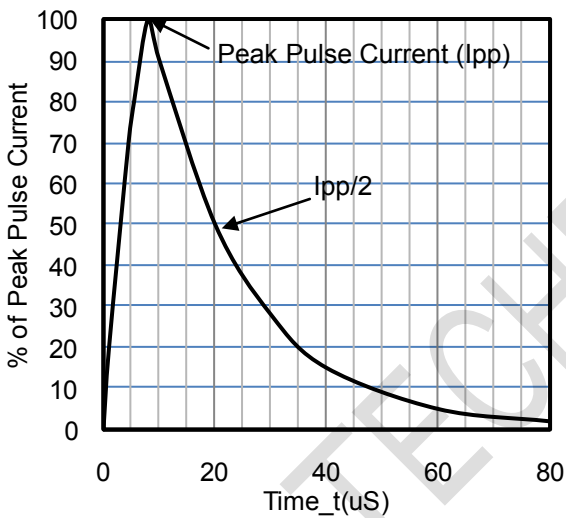

**8 X 20uS Pulse Waveform**

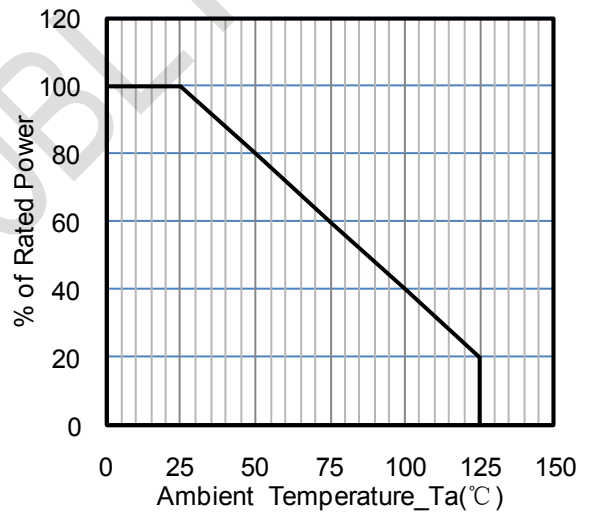


**Power Derating Curve**

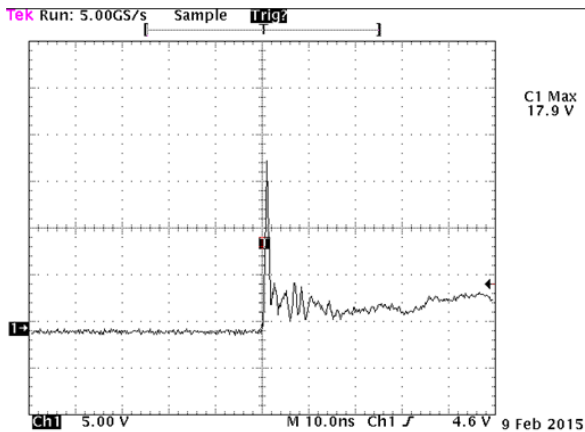

**ESD Clamping Voltage**


**+8 kV Contact per IEC61000-4-2**

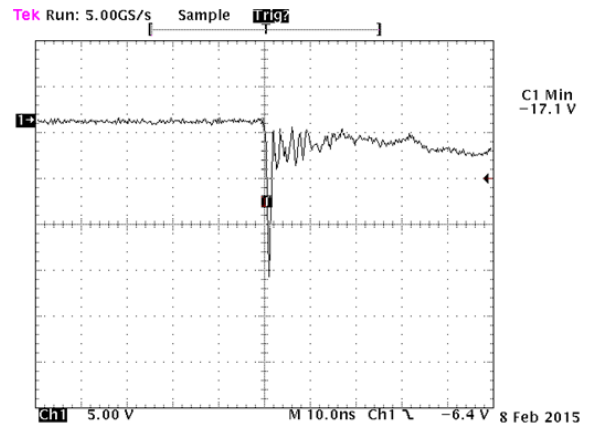

**ESD Clamping Voltage**

**-8 kV Contact per IEC61000-4-2**


**SOD-523 Package Outline Drawing**

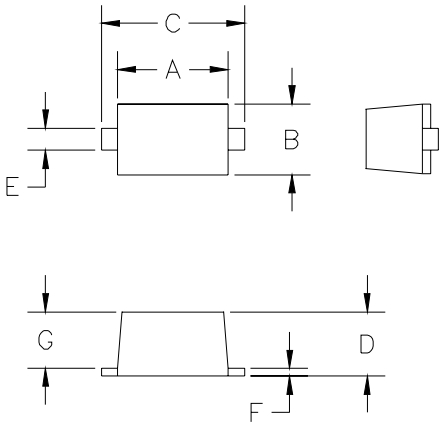

| DIM <sup>N</sup> | INCHES |      | MM [1] |      | NOTE |
|------------------|--------|------|--------|------|------|
|                  | MIN    | MAX  | MIN    | MAX  |      |
| A                | .043   | .051 | 1.10   | 1.30 | —    |
| B                | .028   | .035 | 0.70   | 0.90 | —    |
| C                | .059   | .067 | 1.50   | 1.70 | —    |
| D                | .020   | .028 | 0.50   | 0.70 | —    |
| E                | .010   | .014 | 0.25   | 0.35 | —    |
| F                | .004   | .008 | 0.10   | 0.20 | —    |
| G                | .020   | .028 | 0.50   | 0.70 | —    |

[1] CONTROLLING DIMENSION: MILLIMETERS

**Suggested Land Pattern**

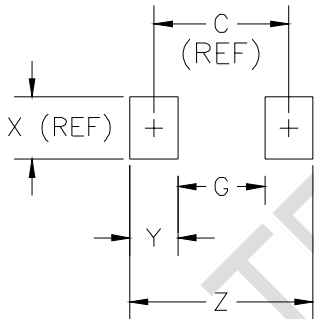

| DIM <sup>N</sup> | INCHES |      | MM [1] |      | NOTE |
|------------------|--------|------|--------|------|------|
|                  | MIN    | MAX  | MIN    | MAX  |      |
| C                | —      | .067 | —      | 1.70 | REF  |
| G                | —      | .043 | —      | 1.10 | —    |
| X                | —      | .031 | —      | 0.80 | REF  |
| Y                | —      | .024 | —      | 0.60 | —    |
| Z                | —      | .091 | —      | 2.30 | —    |

[1] CONTROLLING DIMENSION: MILLIMETERS

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [ESD Suppressors / TVS Diodes](#) category:*

*Click to view products by [TECH PUBLIC](#) manufacturer:*

Other Similar products are found below :

[NTE4902](#) [P4SMAJ15A](#) [P4SMAJ26A](#) [SMAJ400CA-TP](#) [TGL34-47CA](#) [ESDAULC45-1BF4](#) [SM1605E3/TR13](#) [SMF20A-TP](#) [P4SMAJ12A](#)  
[CPDUR24V-HF](#) [CPDQC5V0USP-HF](#) [CPDQC5V0-HF](#) [MPLAD30KP45CAE3](#) [MMBZ27VCLQ-7-F](#) [MMAD1108/TR13](#) [MPLAD30KP24A](#)  
[ACPDQC5V0R-HF](#) [DFLT170A-7](#) [NTE4900](#) [NTE4926](#) [NTE4938](#) [SMF22A-TP](#) [SMF12A-TP](#) [SLVU2.8-TP](#) [SMLJ6.5CA-TP](#) [SMAJ6.5CA-](#)  
[TP](#) [MMAD1108E3/TR13](#) [D5V0M1U2LP3-7](#) [SMAJ400A-TP](#) [AOZ8811DT-03](#) [AOZ8831DI-05](#) [AOZ8831DT-03](#) [SMAJ188CA](#) [3SMC33CA](#)  
[BK](#) [CPDQC3V3C-HF](#) [CPDQC12VE-HF](#) [MPLAD30KP170CA](#) [82357120100](#) [5.0SMLJ15CA-TP](#) [5KP18A-TP](#) [P6KE8.2A-TP](#)  
[MPLAD30KP43CAE3](#) [SMAJ43A-TP](#) [D5V0F6U8LP33-7](#) [TVS5501V10MUT5G](#) [5.0SMLJ24CA-TP](#) [SMAJ110CA-TP](#) [MPLAD15KP75CAE3](#)  
[MMAD1103e3/TR13](#) [DFLT40AQ-7](#)