

## Features

- Ultra small package: 0.6x0.3x0.3mm
- Ultra low capacitance: 0.2 pF typical
- Ultra low leakage: nA level
- Low operating voltage: 5V
- Low clamping voltage
- 2-pin leadless package
- Complies with following standards:
  - - IEC 61000-4-2 (ESD) immunity test
  - Air discharge:  $\pm 23\text{kV}$
  - Contact discharge:  $\pm 20\text{kV}$
  - IEC61000-4-5 (Lightning) 3A (8/20  $\mu\text{s}$ )
- These are Pb-Free Devices
- Response Time is Typically  $< 1\text{ ns}$


## Mechanical Characteristics

- Package: DFN0603-2 (0201)
- Lead Finish: Matte Tin
- Case Material: “Green” Molding Compound.
- Moisture Sensitivity: Level 3 per J-STD-020
- Terminal Connections: See Diagram Below
- Shipping Qty :15000pcs Or 10000/7Inch Tape & Reel

## Applications

- Cellular Handsets and Accessories
- Personal Digital Assistants
- Notebooks and Handhelds
- Portable Instrumentation
- Digital Cameras
- Peripherals

## Dimensions and Pin Configuration



**Absolute Maximum Ratings** (Tamb=25°C unless otherwise specified)

| Parameter                       | Symbol | Value       | Unit |
|---------------------------------|--------|-------------|------|
| Peak Pulse Power (8/20µs)       | Ppk    | 70          | W    |
| Peak Pulse Current (8/20µs)     | Ipp    | 3           | A    |
| ESD per IEC 61000-4-2 (Air)     | VESD   | ±18         | kV   |
| ESD per IEC 61000-4-2 (Contact) |        | ±12         |      |
| Operating Temperature Range     | TJ     | -55 to +125 | °C   |
| Storage Temperature Range       | Tstg   | -55 to +150 | °C   |

**Electrical Characteristics** (TA=25°C unless otherwise specified)

| Parameter               | Symbol | Min | Typ | Max  | Unit | Test Condition        |
|-------------------------|--------|-----|-----|------|------|-----------------------|
| Reverse Working Voltage | VRWM   |     |     | 5    | V    |                       |
| Breakdown Voltage       | VBR    | 6   | 7.5 | 8.6  | V    | IT = 1mA              |
| Reverse Leakage Current | IR     |     |     | 0.07 | µA   | VRWM = 5V             |
| Clamping Voltage        | VC     |     |     | 12   | V    | Ipp=1A(8x 20us pulse) |
| Clamping Voltage        | VC     |     |     | 20   | V    | Ipp=3A(8x 20us pulse) |
| Junction Capacitance    | CJ     |     | 0.2 | 0.25 | pF   | VR = 0V, f = 1MHz     |

**Typical Performance Characteristics ( $T_A=25^\circ\text{C}$  unless otherwise Specified)**

Fig1. 8/20 $\mu\text{s}$  Pulse Waveform

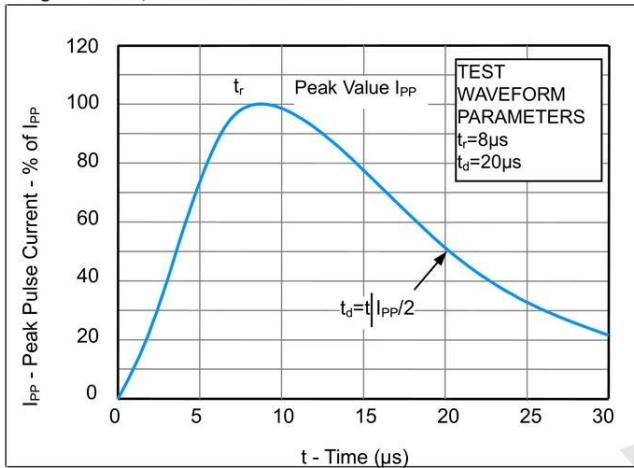


Fig2. ESD Pulse Waveform (according to IEC 61000-4-2)



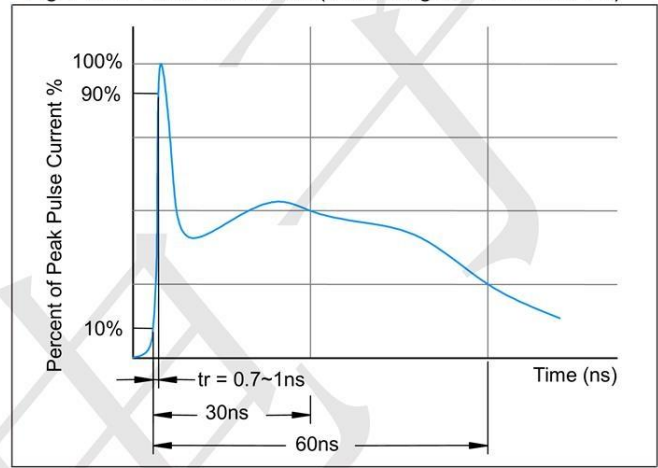


Fig3. Power Derating Curve



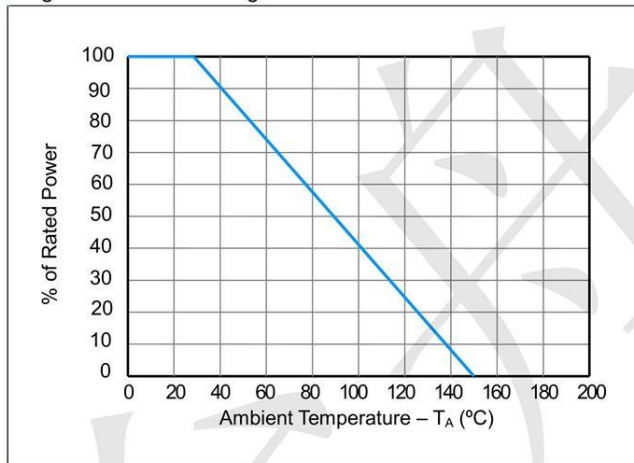


**DFN0603-2 Package Outline Drawing (0201)**

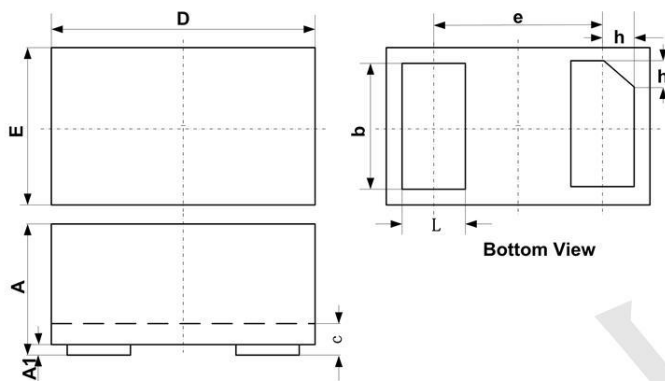

| SYM | DIMENSIONS  |       |       |
|-----|-------------|-------|-------|
|     | MILLIMETERS |       |       |
|     | MIN         | NOM   | MAX   |
| A   | 0.230       | 0.300 | 0.330 |
| A1  | 0.000       | 0.020 | 0.050 |
| b   | 0.215       | 0.245 | 0.275 |
| c   | 0.120       | 0.150 | 0.180 |
| D   | 0.550       | 0.600 | 0.650 |
| e   | 0.355 BSC   |       |       |
| E   | 0.250       | 0.300 | 0.350 |
| L   | 0.160       | 0.190 | 0.220 |
| h   | 0.079 BSC   |       |       |

**Suggested Land Pattern**

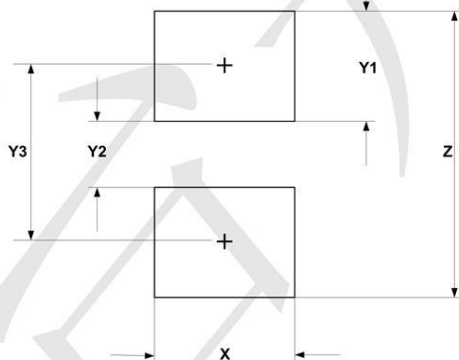

| SYM | DIMENSIONS  |        |
|-----|-------------|--------|
|     | MILLIMETERS | INCHES |
| X   | 0.30        | 0.012  |
| Y1  | 0.25        | 0.010  |
| Y2  | 0.15        | 0.006  |
| Y3  | 0.40        | 0.016  |
| Z   | 0.65        | 0.026  |

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [ESD Suppressors / TVS Diodes](#) category:*

*Click to view products by [TECH PUBLIC](#) manufacturer:*

Other Similar products are found below :

[60KS200C](#) [D18V0L1B2LP-7B](#) [D5V0F4U5P5-7](#) [DESD5V0U1BB-7](#) [NTE4902](#) [P4KE27CA](#) [P6KE11CA](#) [P6KE39CA-TP](#) [P6KE8.2A](#)  
[SA110CA](#) [SA60CA](#) [SA64CA](#) [SMBJ12CATR](#) [SMBJ33CATR](#) [SMBJ8.0A](#) [ESD101-B1-02ELS E6327](#) [ESD105-B1-02EL E6327](#) [ESD112-B1-02EL E6327](#) [ESD119B1W01005E6327XTSA1](#) [ESD5V0L1B02VH6327XTSA1](#) [ESD7451N2T5G](#) [19180-510](#) [CPDT-5V0USP-HF](#)  
[3.0SMCJ33CA-F](#) [3.0SMCJ36A-F](#) [HSPC16701B02TP](#) [D3V3Q1B2DLP3-7](#) [D55V0M1B2WS-7](#) [DESD5V0U1BL-7B](#) [DRTR5V0U4SL-7](#)  
[SCM1293A-04SO](#) [ESD200-B1-CSP0201 E6327](#) [SM12-7](#) [SMF8.0A-TP](#) [SMLJ45CA-TP](#) [SMQA1000T1G](#) [CEN955 W/DATA](#) [82350120560](#)  
[VESD12A1A-HD1-GS08](#) [CPDUR5V0R-HF](#) [CPDQC5V0U-HF](#) [CPDQC5V0USP-HF](#) [CPDQC5V0-HF](#) [IP4042CX5/LF,135](#) [D1213A-01LP4-7B](#) [D1213A-02WL-7](#) [1SMB33CAT3G-XYZ](#) [MMAD1108/TR13](#) [5KP100A](#) [5KP15A](#)