


SPECIFICATION CONTROL DRAWING

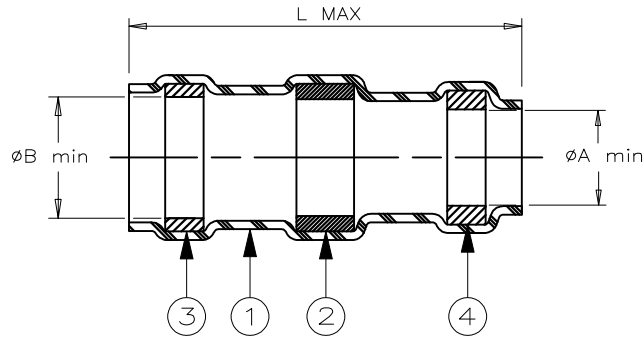

PRODUCT REVISION		Product dimensions			Cable dimensions			
Product Name		L MAX	øA min	øB min	øD MAX	øE min	øG MAX	J±0.5 (±0.02)
D-101-00	P	17.25 (0.680)	4.55 (0.180)	5.00 (0.200)	5.00 (0.200)	2.5 (0.100)	4.55 (0.180)	7 (0.275)

APPLICATION

These parts are designed to provide an environment protected shield termination on cables, rated for 125°C minimum, meeting the dimensional criteria listed, having tin or silver plated copper shields.

Install using Raychem-approved convection or infrared tools in accordance with Raychem assembly procedure RCPS-100-70.

PERFORMANCE


Assemblies will meet requirements of Raychem specification RT-1404 and National Aerospace Standard NAS-1747.

Temperature range:
-55°C to +150°C.

TECHNICAL DETAILS

ITEM	DESCRIPTION	MATERIAL
①	Heat-shrinkable insulation sleeve Transparent blue.	Radiation cross-linked polyvinylidene fluoride.
②	Solder preform with flux.	Sn63 Pb37 solder alloy with mildly activated rosin flux. Thermal indicator: violet
③	Meltable ring. color: grey	Thermally stabilized thermoplastic.
④	Meltable ring. color: grey	Thermally stabilized thermoplastic.

For best results, prepare the cable as shown:

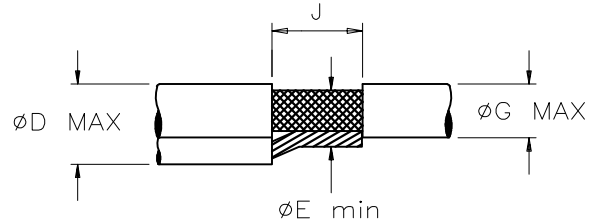

IF THIS DOCUMENT IS PRINTED IT BECOMES UNCONTROLLED.
CHECK FOR THE LATEST REVISION.

		THERMOFIT DEVICES		TE CONNECTIVITY 300 Constitution Drive Menlo Park, CA 94025		TITLE: <h2 style="text-align: center;">SOLDERSLEEVE SHIELD TERMINATOR</h2>	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS.						DOCUMENT NO: <h2 style="text-align: center;">D-101-00</h2>	
TOLERANCES: 0.00 --- 0.0 --- 0 ---		ANGLES: --- ROUGHNESS IN MICRON		RAYCHEM RESERVES THE RIGHT TO AMEND THIS DRAWING AT ANY TIME. USERS SHOULD EVALUATE THE SUITABILITY OF THE PRODUCT FOR THEIR APPLICATION.		REV: 3 DATE: 20APR11	
CAD FILE: D961387		REPLACES: D10100		DRAWN: J.JUDGE		SHEET: 1 OF 1	

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Solder Sleeves & Shield Tubing](#) category:

Click to view products by [TE Connectivity](#) manufacturer:

Other Similar products are found below :

[D-260-C-A](#) [899170-000](#) [620040N001](#) [620069N003](#) [620263N004](#) [CTA-0050-01](#) [629624-000](#) [6501390002](#) [CX0781-000](#) [CX0782-000](#)
[696396-000](#) [697080-000](#) [715325N001](#) [FLX40-030-02-CS8652](#) [908357N001](#) [D-436-38CS2908](#) [CB0213-000](#) [CB0219-000](#) [274384-000](#)
[285343-000](#) [970053-000](#) [ST18-2-00](#) [FLX40-020-04-CS8651](#) [317035-000](#) [325534-000](#) [D-100-00-WOTI](#) [D-150-1011](#) [395947-000](#)
[427243N001](#) [514535-000](#) [C03534-000](#) [CB0220-000](#) [D44133N001](#) [626168-000](#) [451893-000](#) [931289-000](#) [162583-000](#) [585769N001](#)
[610001N004](#) [6200060004](#) [622041N003](#) [626167-000](#) [EG3678-000](#) [650075N002](#) [6500820003](#) [6500850004](#) [650126N010](#) [650127N005](#)
[146201-000](#) [7400720001](#)