#### SAFETY ORGANIZATIONS

THIS FILTER HAS BEEN FORMALLY RECOGNIZED, CERTIFIED OR APPROYED BY THE LISTED AGENCY. THEREFORE, ALL TEST/REQUIREMENTS SPECIFIED IN THE LATEST REVISION OF THE FOLLOWING AGENCY STANDARDS HAVE BEEN MET:

UL RECOGNIZED: UL 1283 CSA CERTIFIED: CSA 22.2, # 8 VDE APPROVED: EN 133200

#### OPERATING SPECIFICATIONS

LINE CURRENT/YOLTAGE: 10 AMP/40°C, 120/250YAC

LINE FREQUENCY: 50-60Hz

MAXIMUM LEAKAGE CURRENT,

EACH LINE TO GROUND:

0.21 mÅ @ 120V, 60Hz 0.36 mÅ @ 250V, 50Hz

60

OPERATING AMBIENT TEMP. RANGE: -10°C TO +40°C @ RATED CURRENT, Ic.

IN AN AMBIENT,  $T_0$ , HIGHER THAN 40°C, THE MAXIMUM OPERATING CURRENT,  $I_0$ , IS AS FOLLOWS:  $I_0 = I_0 - \sqrt{100 - I_0}$ 100 - T<sub>o</sub>  $I_0 = I_r - /$ 

#### RELIABILITY SPECIFICATIONS:

STORAGE TEMPERATURE: -40°C TO +85°C HUMIDITY: 21 DAYS @ 40°C 95% RH. CURRENT DYERLOAD TEST: 6 TIMES In FOR 8 ZECONOS

#### TEST SPECIFICATIONS:

INDUCTANCE: 0.495mH NOMINAL CAPACITANCE: (MEASURED @ 1KHz, 0.250VAC MAX., 25°C±1°C)

LINE TO GROUND: 0.0056µF ±20% LINE TO LINE: 0.201µF ±20% 1.5M DISCHARGE RESISTOR:

L/G ÅND L/L I.R.

NO DISCHARGE RESISTOR: 6000MA (MIN.) @ 100VDC,

20°C AND 50% RH

CATALOG # 10EK1

10631-0187-05 KAW


EC # APPRVD DATE

### RECOMMENDED RECEIVING INSPECTION HIPOT:

LINE TO GROUND: 1500YAC OR 2250YDC FOR 1 MINUTE LINE TO LINE: 1450YDC FOR 1 MINUTE

#### FILTER APPROVAL:

THE BEST WAY TO SELECT AND QUALIFY A FILTER IS FOR YOUR ENGINEERING TO TEST THE UNIT IN YOUR EQUIPMENT.

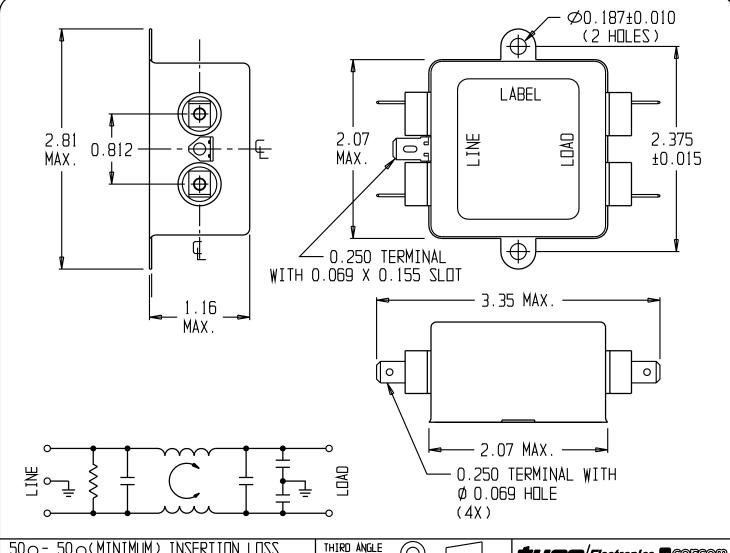

50介-	50a-50a(MINIMUM) INSERTION LOSS									
FREQUENCY MHz	0.15	0.5	1.0	2.0	5.0	10	20	30		
COMMON dB	10	21	26	31	38	41	44	45		
DIFF. dB	8	3	30	50	60	60	50	44		

THIRD ANGLE OPROJECTION UNLESS OTHERWISE SPECIFIED, TOLERANCE TO BE ± .025

MATERIAL & FINISH: AS SUPPLIED This document is proprietory to CORCOM INC. and is not to be reproduced nor used for nanufacturing purposes except on CORCOM'S prior written consent.

TLICO Electronics COMO 844 E. ROCKLAND RD. LIBERTYYILLE IL 60048

## CUSTOMER DRAWING 10EK1

,		11	
TYCO: 1-	1600027-3		
			_^
SCALE: NTS	DATE: 12SEP89	CATALOG NO.	REV.
		4070774	A .
DRV. BY:	DRIG: _w	10EK1	A*

# **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Power Line Filters category:

Click to view products by TE Connectivity manufacturer:

Other Similar products are found below:

6609019-3 6609026-5 6609030-6 6609973-2 D30A 7-1609090-5 F2810 F4456A F7382Z F7863Z FAHAV3100ZC000 806276 FN2020B
1-06 FN2080B-10-06 FN2410H-32-33 FN2410H-80-34 FP144 FS4153-20-06 FS4353-500-99 12-MMB-030-11-D DB4-393 15811T200

20B1 LC630 2B1 1609080-2 1609993-8 1-6609070-1 F1100AA02 F1150CC10 F1500CA10 F1500CA15 F4041Z F7585E 1B1

FN2070A-16-06 FN2090A-20-06 FN2090B-12-06 FN2090Z-1-06 FN2410H-25-33 FN2410H-60-34 FN2410H-8-44 FN2412H-8-44

FN323B-6-01 FN3258H-130-35 FN610R-3-06 20EHQ7 20EHZ7 20K1 30B6