
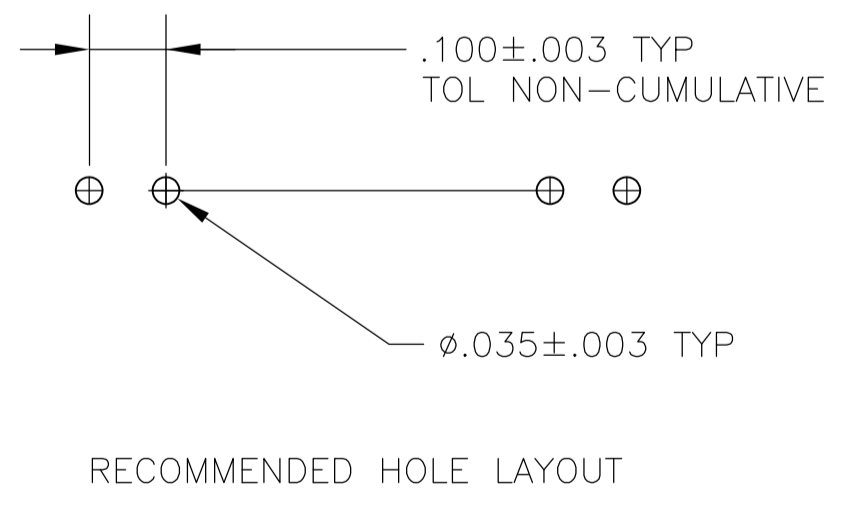


- 1 ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS
- 2 TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADERS ARE HELD LAT AGAINST THE PRINTED CIRCUIT BOARD
- 3 THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING
- 4 POINT OF MEASUREMENT FOR PLATING THICKNESS
- 5 PARTS PACKAGED IN GPAX
- 6 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

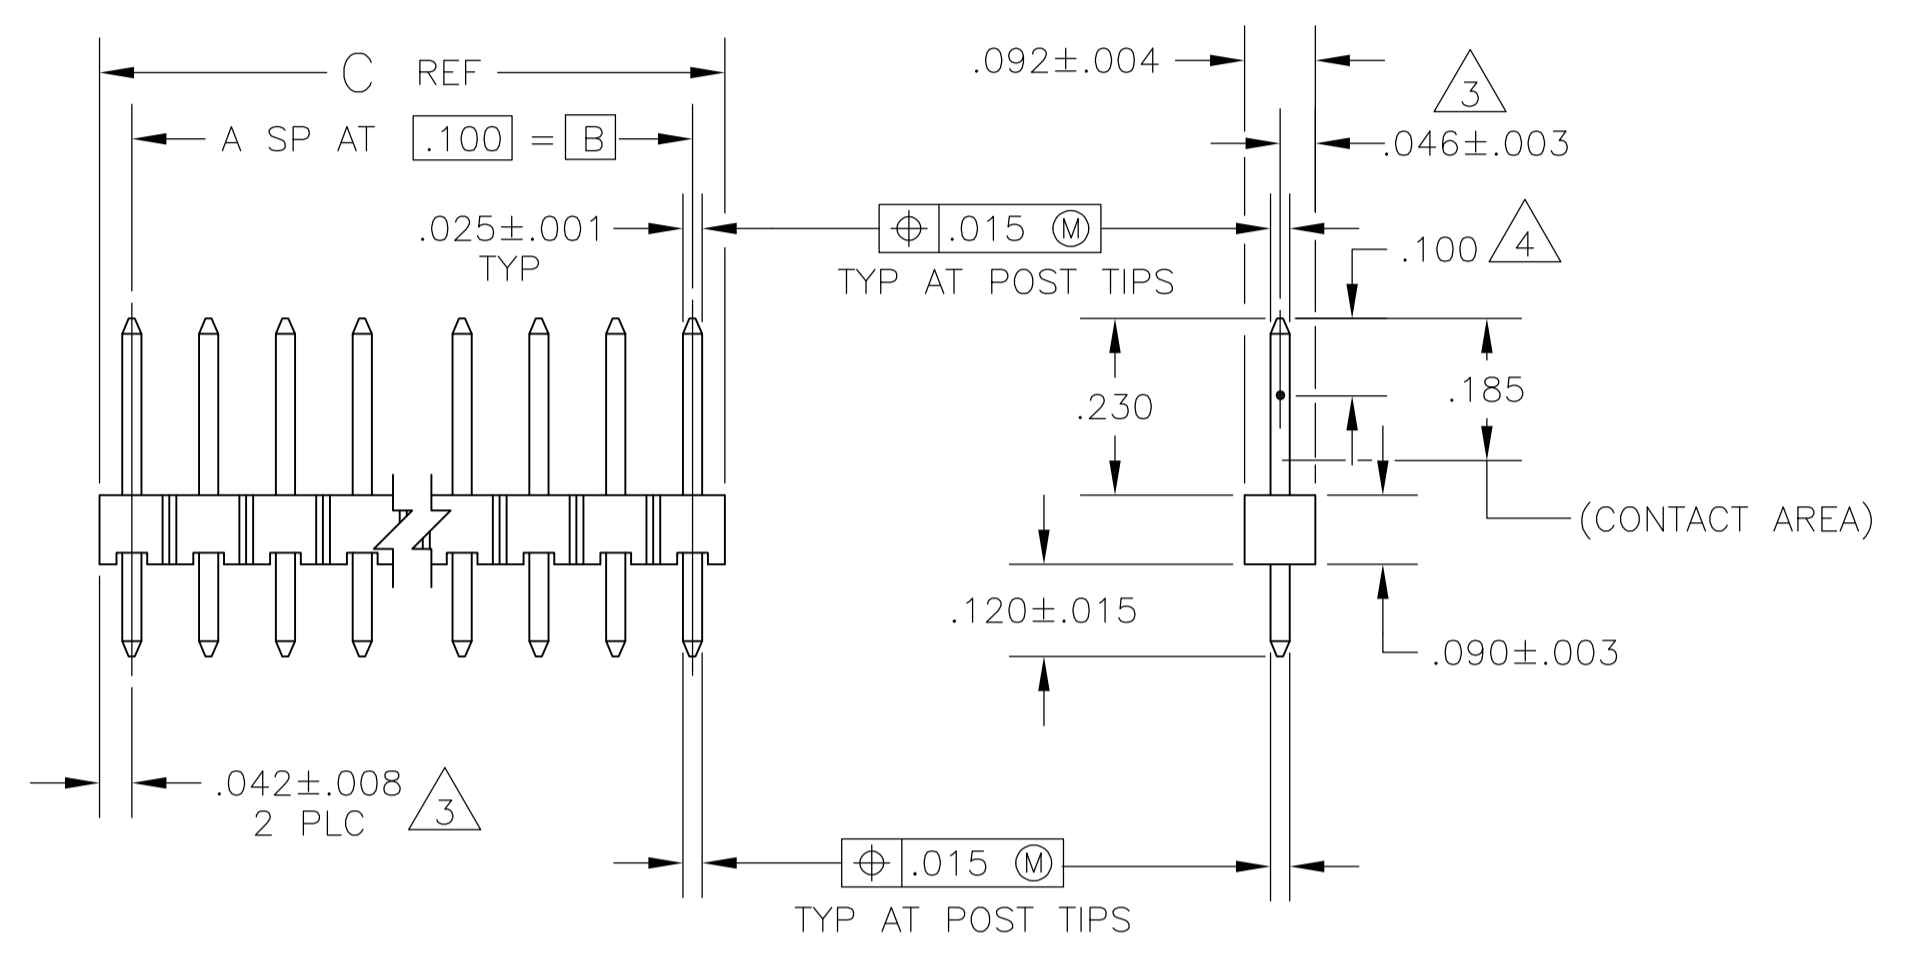

5	6	OBSOLETE	.284	.200	2	3	4-103239-2
			3.984	3.900	39	40	4-103239-0
6	OBSOLETE	3.884	3.800	38	39	3-103239-9	
		3.784	3.700	37	38	3-103239-8	
		3.684	3.600	36	37	3-103239-7	
		3.584	3.500	35	36	3-103239-6	
		3.484	3.400	34	35	3-103239-5	
		3.384	3.300	33	34	3-103239-4	
		3.284	3.200	32	33	3-103239-3	
		3.184	3.100	31	32	3-103239-2	
		3.084	3.000	30	31	3-103239-1	
		2.984	2.900	29	30	3-103239-0	
		2.884	2.800	28	29	2-103239-9	
		2.784	2.700	27	28	2-103239-8	
		2.684	2.600	26	27	2-103239-7	
		2.584	2.500	25	26	2-103239-6	
		2.484	2.400	24	25	2-103239-5	
		2.384	2.300	23	24	2-103239-4	
		2.284	2.200	22	23	2-103239-3	
		2.184	2.100	21	22	2-103239-2	
2.084	2.000	20	21	2-103239-1			
1.984	1.900	19	20	2-103239-0			
6	OBSOLETE	1.884	1.800	18	19	1-103239-9	
		1.784	1.700	17	18	1-103239-8	
		1.684	1.600	16	17	1-103239-7	
		1.584	1.500	15	16	1-103239-6	
		1.484	1.400	14	15	1-103239-5	
6	SUPERSEDED BY 6-146281-3	1.384	1.300	13	14	1-103239-4	
		1.284	1.200	12	13	1-103239-3	
6	OBSOLETE	1.184	1.100	11	12	1-103239-2	
		1.084	1.000	10	11	1-103239-1	
		.984	.900	9	10	1-103239-0	
		.884	.800	8	9	103239-9	
		.784	.700	7	8	103239-8	
		.684	.600	6	7	103239-7	
		.584	.500	5	6	103239-6	
		.484	.400	4	5	103239-5	
		.384	.300	3	4	103239-4	
		.284	.200	2	3	103239-3	
		.184	.100	1	2	103239-2	
		.084	—	—	1	103239-1	
		C	B	A	NO OF POSN	PART NUMBER	

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED:	DIN H MOLL 13OCT87	STE TE Connectivity
0 PLC ± -	1 PLC ± -	CHK T. CLARK 20OCT87	NAME
2 PLC ± -	3 PLC ± .005	APVD T. CLARK 20OCT87	PRODUCT SPEC
4 PLC ± -	ANGLES ± -	APPLICATION SPEC	SIZE
MATERIAL: HOUSING: FLAME RESISTANT THERMOPLASTIC COLOR: BLACK POSTS: COPPER ALLOY	FINISH: POSTS: .00020 GOLD ON CONTACT AREA .00010-00005 WHITE TIN LEAD ON SOLDER TAIL, ALL OVER .00020 NICKEL	WEIGHT: —	RESTRICTED TO
RESTRICTED CUSTOMER		SCALE: 4:1	SHEET 1 OF 1 REV J

HEADER ASSY, MOD II, BREAKAWAY, SINGLE ROW, .100CL, VERTICAL, WITH .025 SQUARE POSTS

00779 © 103239

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [TE Connectivity](#) manufacturer:

Other Similar products are found below :

[95000-104TRLF](#) [10135584-644402LF](#) [DF62W-EP2022PCA](#) [95000-106TRLF](#) [DF62W-2022SCA](#) [DF62W-EP2022PC](#) [2203348](#) [DF62W-2022SC](#) [1084018](#) [1029039](#) [1084017](#) [802-10-012-10-002000](#) [1112640](#) [1112639](#) [000-34000](#) [0009482033](#) [0009507031](#) [57102-S06-03LF](#) [57202-S52-04LF](#) [PCN6-15S-2.5E](#) [0039019024](#) [58102-G61-06LF](#) [582553-1](#) [0009508121](#) [0050291907](#) [018731A](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#) [60101931](#) [60598-1 \(Cut Strip\)](#) [M1625-3R/100](#) [61062-3](#) [61082-181009](#) [636-1427](#) [638009-1](#) [641938-9](#) [641991-4](#) [644168-1](#) [647662-1](#) [65039-019ELF](#) [65817-002LF](#) [65817-015LF](#) [65863-015LF](#) [66207-023LF](#) [67016-026LF](#) [67046-001LF](#) [67095-007LF](#) [68002-116](#) [68016-236H](#) [68648-049](#)