



REVISIONS				
P	LTN	DESCRIPTION	DATE	APVD
I		PROPOSED	17NOV2016	JM RP
B		REVISED TO ECO-17-004845	28APR2017	AP RP
C		REVISED PER ECO-19-008905	11JUN2019	AP RP
D		REVISED PER ECO-20-008922	30JUN2020	AP RP

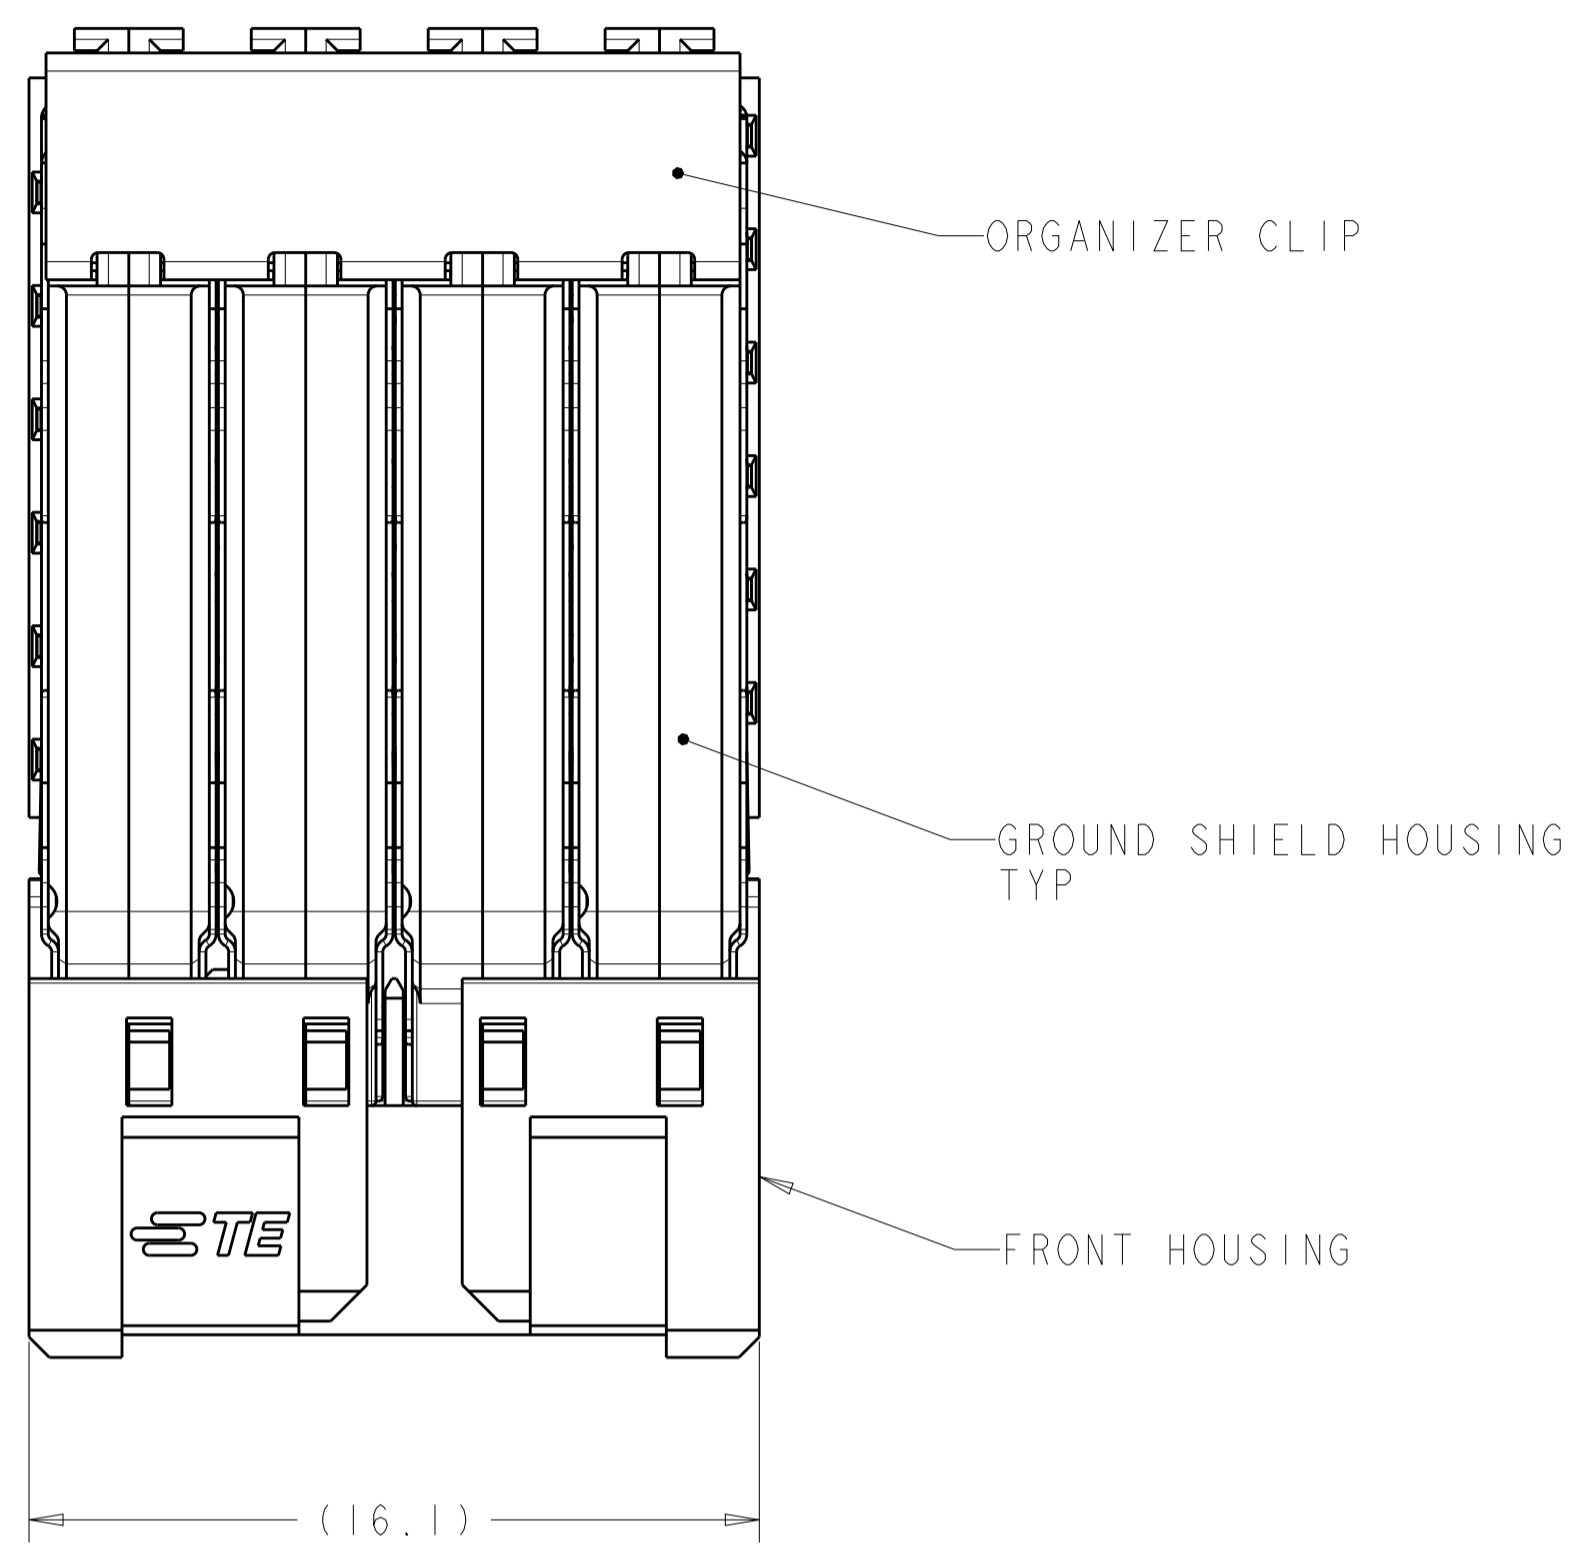

- △ CONTACTS AND SHIELDS - COPPER ALLOY
 ORGANIZER - STAINLESS STEEL
 HOUSING, GROUND SHELLS, AND PIN SPACER - THERMOPLASTIC, UL 94V-0, BLACK
- △ FINISH:
 MATING AREA: 1.25um MIN GOLD OVER 1.25um MIN NICKEL UNDERPLATE OVER ENTIRE CONTACT. COMPLIANT PIN AREA: . 0.5um MIN TIN-LEAD
- △ GROUND PLATED THRU HOLE REQUIREMENTS:
 FINISHED HOLE = $\varnothing 0.37 \pm 0.05$
 HOLE SIZE PRIOR TO PLATING = $\varnothing 0.450 \pm 0.025$
 COPPER THICKNESS = 0.025 MIN
 0.05um MIN GOLD OVER 3um-6um NICKEL
- △ SIGNAL PLATED THRU HOLE REQUIREMENTS:
 FINISHED HOLE = $\varnothing 0.29 \pm 0.05$
 HOLE SIZE PRIOR TO PLATING = $\varnothing 0.368 \pm 0.025$ (#79 DRILL)
 COPPER THICKNESS = 0.025 MIN
 0.05um MIN GOLD OVER 3um-6um NICKEL
- △ SI VIA PLATED THRU HOLE REQUIREMENTS:
 FINISHED HOLE = ($\varnothing 0.22$)
 HOLE SIZE PRIOR TO PLATING = $\varnothing 0.300 \pm 0.025$
 COPPER THICKNESS = 0.025 MIN
 0.05um MIN GOLD OVER 3um-6um NICKEL
- △ SIGNAL HOLES AND SI VIAS:
 PTH DIMENSIONS APPLY TO THE TOP 1.00mm OF THE PCB THICKNESS FROM THE CONNECTOR MOUNTING SIDE.
 GROUND HOLES:
 PTH DIMENSIONS APPLY TO THE TOP 1.25mm OF THE PCB THICKNESS FROM THE CONNECTOR MOUNTING SIDE.
- △ CONNECTOR MARKED WITH PART NUMBER, DATE CODE, AND "85 OHM" IN APPROXIMATE AREA SHOWN.
- △ DATUMS AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER
- △ APPLIES TO FINISHED HOLE DIAMETER
- △ DATAMATRIX BARCODE MARKING IN THIS AREA.

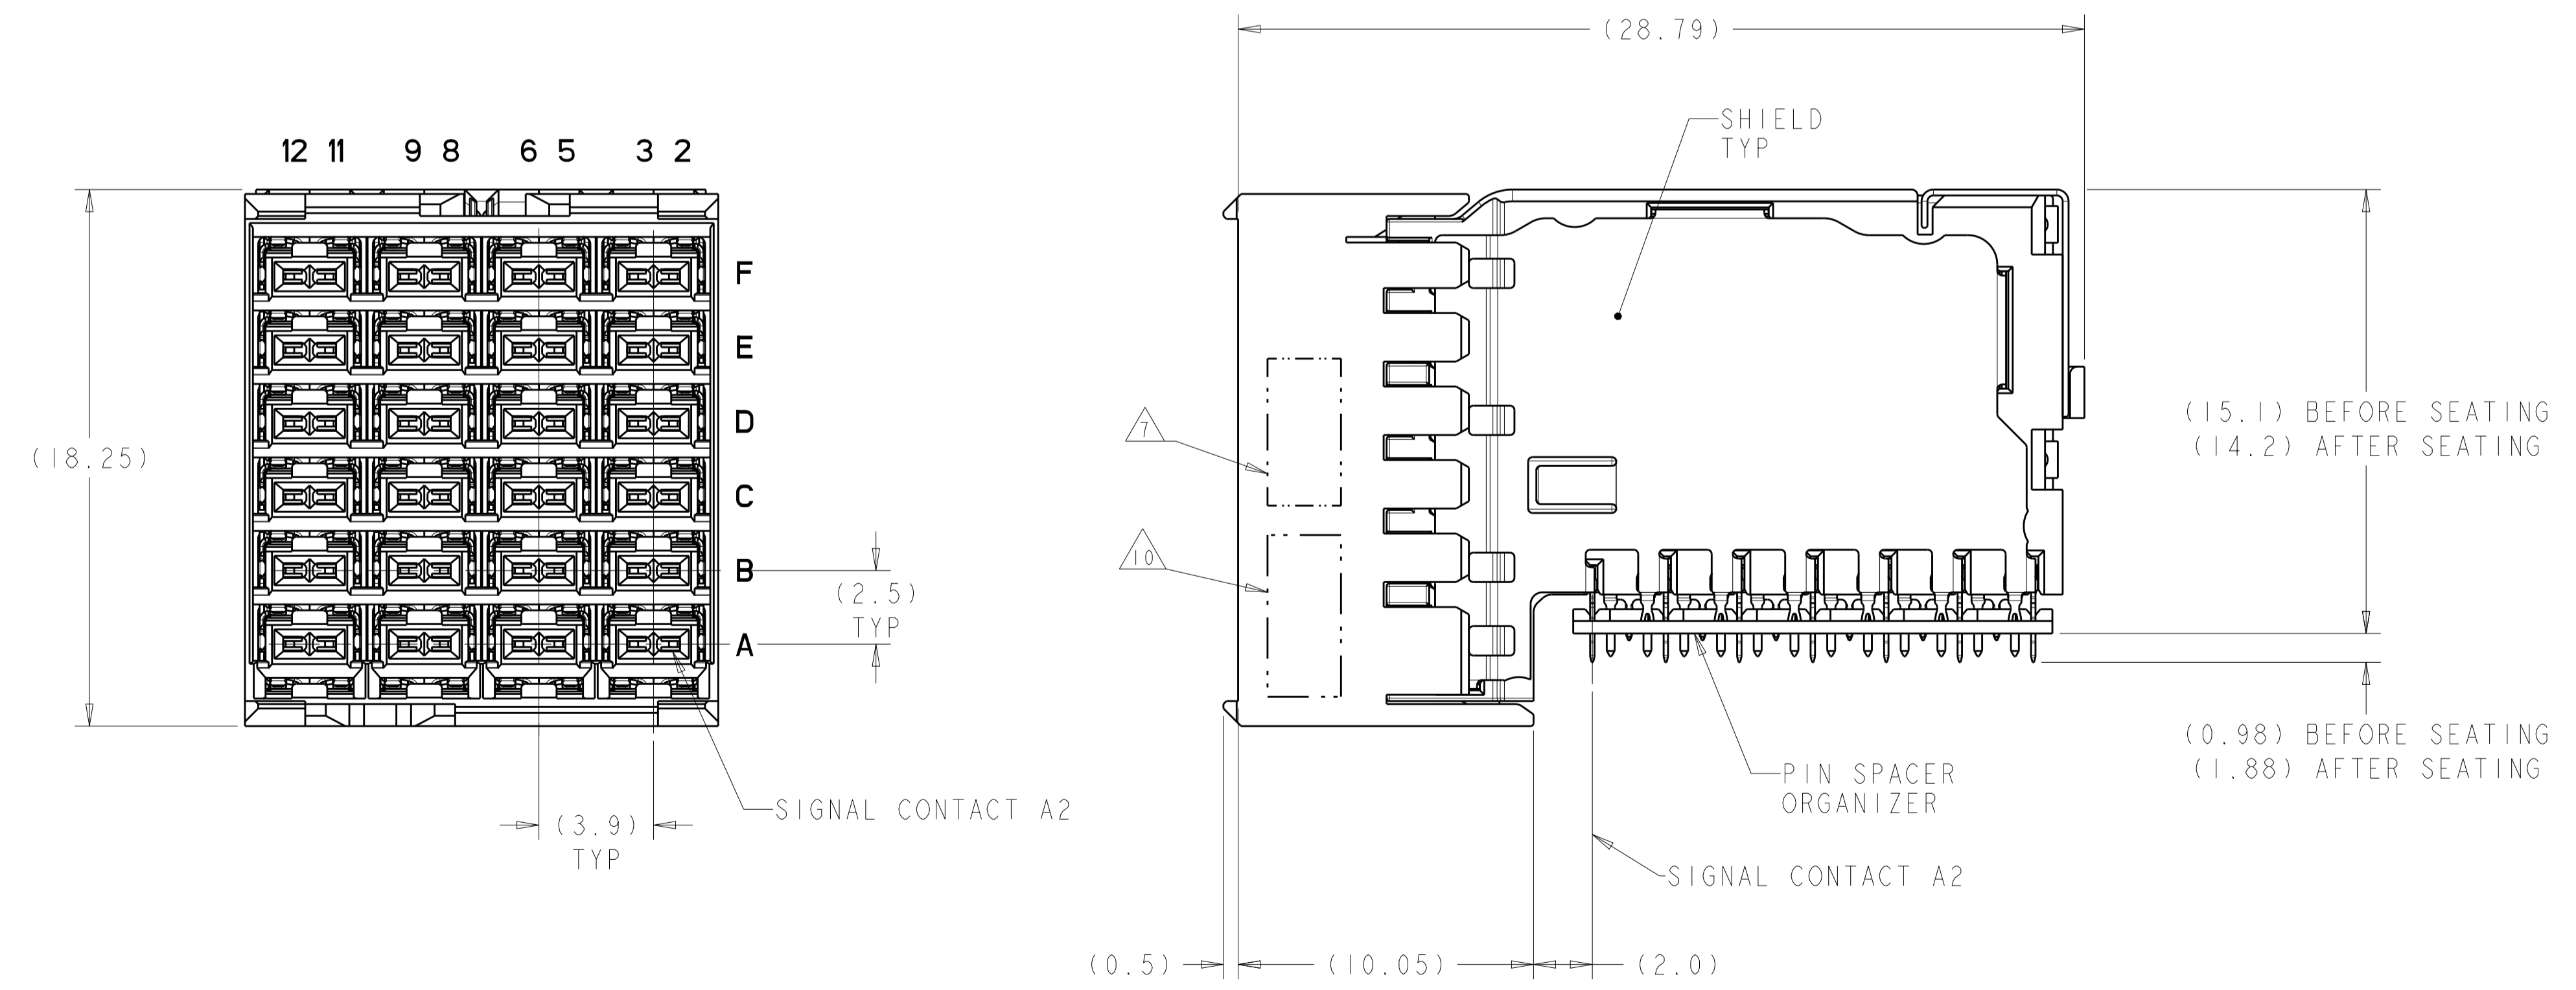

2187687-1
 PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		OWN J. McCLINTON 13JAN2017	TE Connectivity
DIMENSIONS: mm		CHK R. PATTERSON 13JAN2017	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD R. PATTERSON 13JAN2017	NAME RIGHT ANGLE RECEPTACLE ASSEMBLY, 6 PAIR 4 COLUMN, 85 OHM, PAIR-IN-ROW, STRADA WHISPER
0 PLC ±		PRODUCT SPEC 108-32021	
2 PLC ±0.13		APPLICATION SPEC 114-32029	
3 PLC ±		SIZE CAGE CODE DRAWING NO A1 00779 C=2187687	
4 PLC ±		RESTRICTED TO SPACE MICRO	
MATERIAL		WEIGHT	CUSTOMER DRAWING
ANGLES		SCALE 6:1	SHEET 1 OF 2
FINISH		REV D	

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [High Speed/Modular Connectors](#) category:

Click to view products by [TE Connectivity](#) manufacturer:

Other Similar products are found below :

[650827-1](#) [74040-1346](#) [1410191-1](#) [1410368-3](#) [1410964-2](#) [1410326-3](#) [1410367-3](#) [1410971-4](#) [1467833-1](#) [2000877-1](#) [2000878-1](#) [2041314-1](#)
[2065387-1](#) [2187307-1](#) [163P](#) [1934290-1](#) [2000875-1](#) [2065917-1](#) [2102736-2](#) [FSR-40](#) [2169868-2](#) [22354-8](#) [437-5040-000](#) [5-1393565-0](#) [039-](#)
[0246-000](#) [0740618502](#) [0761601016](#) [0784461022](#) [10123159-12ELF](#) [030-2415-003/100 PK](#) [030-7380-004](#) [030-2494-001](#) [532939-1](#) [5532901-](#)
[3](#) [3-1469268-7](#) [74748-102LF](#) [10041743-101LF](#) [10066670-100002LF](#) [1-533915-1](#) [249-4515-000](#) [7-1469373-3](#) [DL2-2J/S](#) [2000713-8](#)
[2000713-7](#) [10124313-101LF](#) [3011-21](#) [757105208](#) [430305-001](#) [4395800100](#) [8140115](#)