
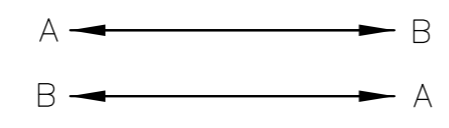


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS				
P	LTR	DESCRIPTION	DATE	DWN	APVD	
CE	16	C	ECR-14-011637	14AUG2014	HZ RZ	

1. MAXIMUM CONNECTOR INSERTION LOSS IS 0.5dB PLUS CABLE ATTENUATION OF 3.5dB/km AT 850nm. MEASURE AGAINST A REFERENCE LEAD
2. TEST DATA PROVIDED WITH EACH ASSEMBLY.
3. PRODUCT AND PROCESSING MUST MEET REQUIREMENTS OF TEC-138-702.

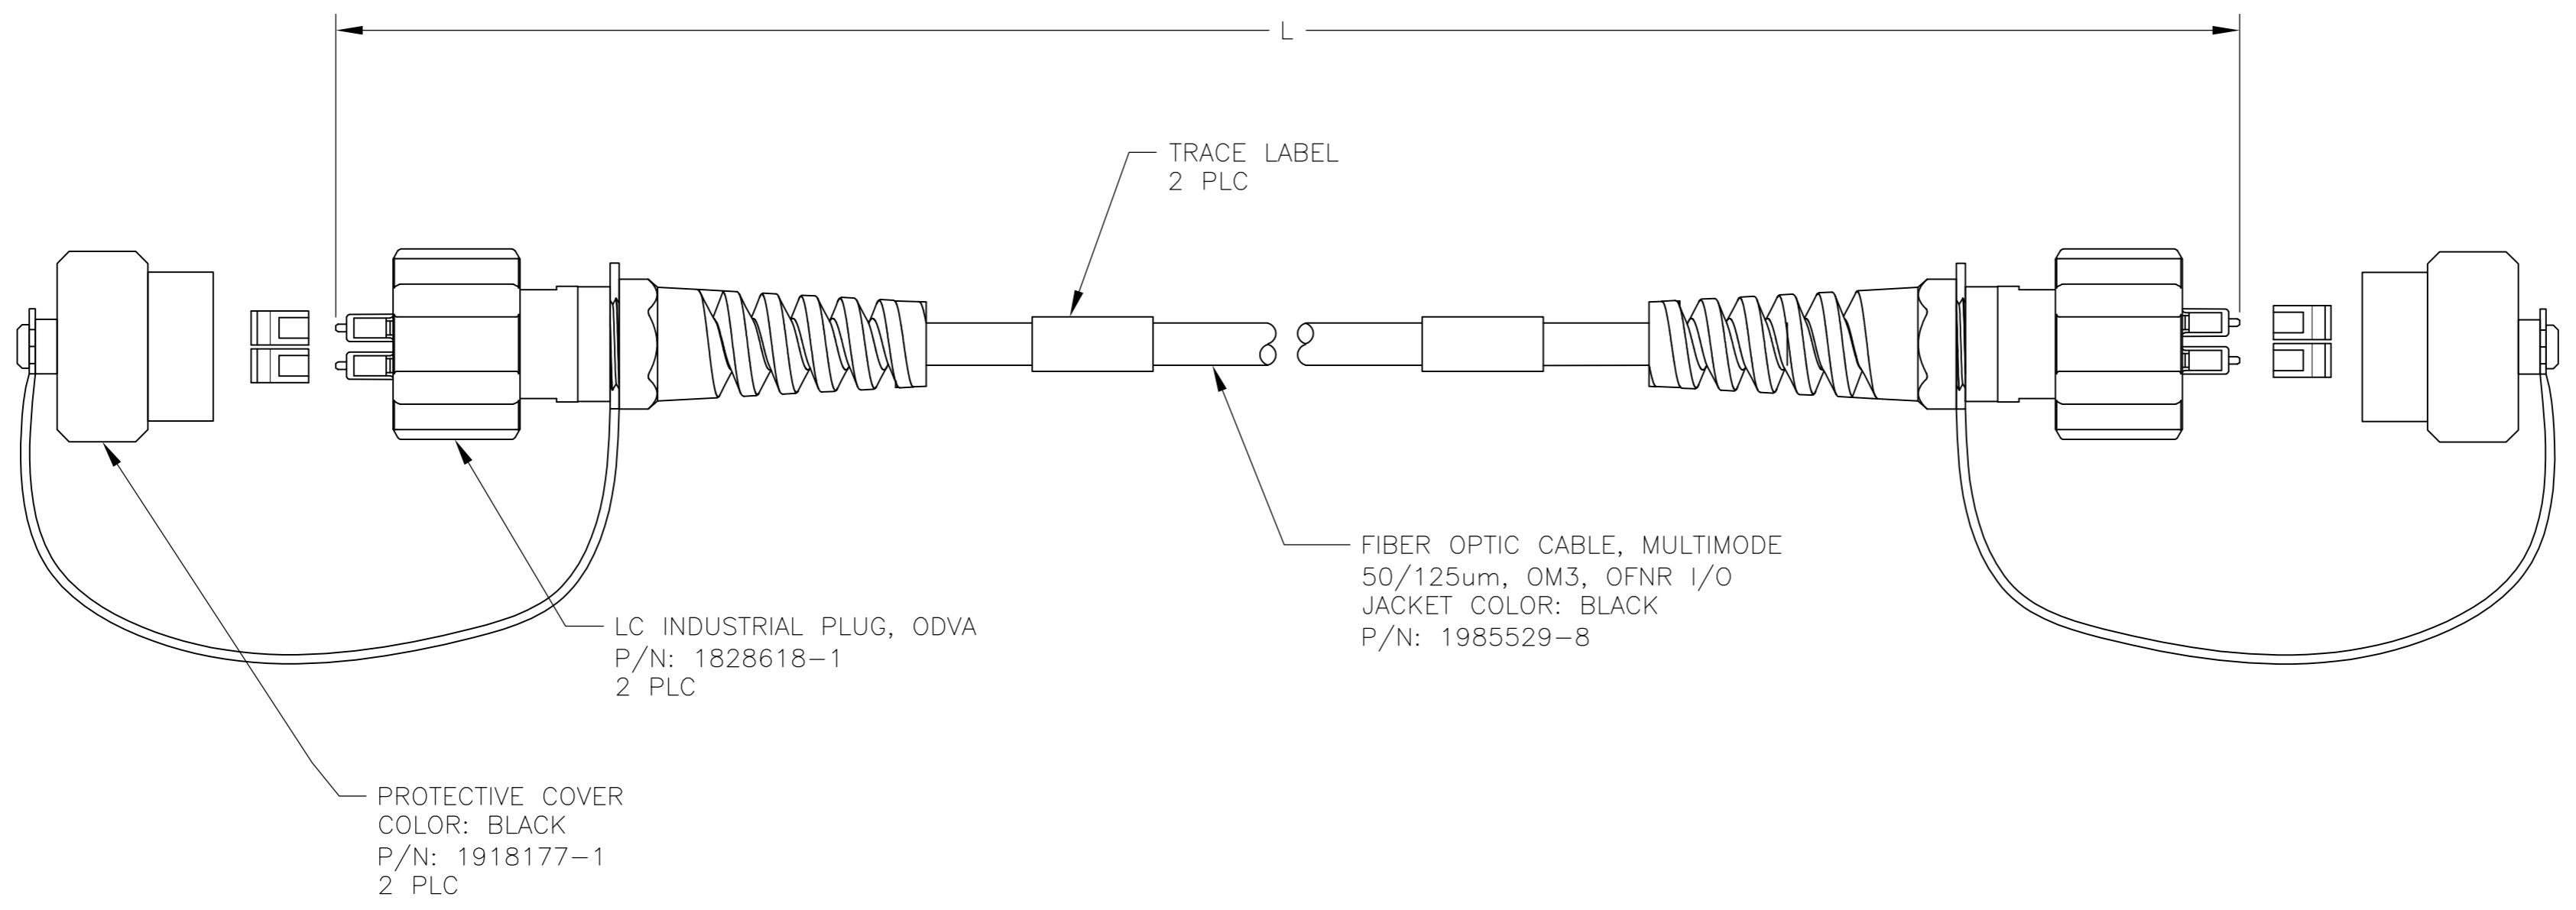

FIBER PATH DETAIL

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN LG EBY 23MAR09	TE Connectivity													
DIMENSIONS: METERS [INCHES]		CHK J.DUNCAN 23MAR09														
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD D. BAECHTLE 23MAR09	NAME CABLE ASSEMBLY, FIBER OPTIC, 50/125, OM3, 2 FIBER BREAKOUT CABLE, SEALED CIRCULAR LC DUPLEX (ODVA), BOTH ENDS													
<table border="1"> <tr><td>0 PLC</td><td>± -</td></tr> <tr><td>1 PLC</td><td>± -</td></tr> <tr><td>2 PLC</td><td>± -</td></tr> <tr><td>3 PLC</td><td>± -</td></tr> <tr><td>4 PLC</td><td>± -</td></tr> <tr><td>ANGLES</td><td>± -</td></tr> </table>		0 PLC	± -	1 PLC	± -	2 PLC	± -	3 PLC	± -	4 PLC	± -	ANGLES	± -	PRODUCT SPEC	SIZE A2	
0 PLC	± -															
1 PLC	± -															
2 PLC	± -															
3 PLC	± -															
4 PLC	± -															
ANGLES	± -															
MATERIAL		APPLICATION SPEC	CAGE CODE 00779	DRAWING NO 2064915												
FINISH		WEIGHT	SCALE NTS	SHEET 1 of 2												
		CUSTOMER DRAWING	RESTRICTED TO	REV C												

2064915

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
CE	16	-	-	SEE SHEET 1	-	-	-

1.38	250.0±2.50	[9842.5±98.4]	8-2064915-2
0.85	100.0±1.00	[3937.0±39.4]	8-2064915-1
1.03	152.40±1.50	[6000.0±60.0]	8-2064915-0
0.77	76.00±0.76	[2992.1±29.9]	7-2064915-6
0.76	75.00±0.75	[2953.0±30.0]	7-2064915-5
0.71	61.00±0.61	[2400.0±24.0]	6-2064915-1
0.68	50.00±0.50	[1969.0±20.0]	5-2064915-0
0.64	40.00±0.40	[1574.80±15.75]	4-2064915-0
0.64	39.00±0.35	[1535.43±13.78]	3-2064915-9
0.63	38.00±0.35	[1496.06±13.78]	3-2064915-8
0.63	37.00±0.35	[1456.69±13.78]	3-2064915-7
0.63	36.00±0.35	[1417.32±13.78]	3-2064915-6
0.62	35.00±0.35	[1377.95±13.78]	3-2064915-5
0.62	34.00±0.30	[1338.58±11.81]	3-2064915-4
0.62	33.00±0.30	[1299.21±11.81]	3-2064915-3
0.61	32.00±0.30	[1259.84±11.81]	3-2064915-2
0.61	31.00±0.30	[1220.47±11.81]	3-2064915-1
0.61	30.00±0.30	[1181.10±11.81]	3-2064915-0
0.60	29.00±0.30	[1141.73±11.81]	2-2064915-9
0.60	28.00±0.30	[1102.36±11.81]	2-2064915-8
0.59	27.00±0.30	[1062.99±11.81]	2-2064915-7
0.59	26.00±0.30	[1023.62±11.81]	2-2064915-6
0.59	25.00±0.30	[984.25±11.81]	2-2064915-5
0.58	24.00±0.30	[944.88±11.81]	2-2064915-4
0.58	23.00±0.30	[905.51±11.81]	2-2064915-3
0.58	22.00±0.30	[866.14±11.81]	2-2064915-2
0.57	21.00±0.30	[826.77±11.81]	2-2064915-1
0.57	20.00±0.30	[787.40±11.81]	2-2064915-0
0.57	19.00±0.30	[748.03±11.81]	1-2064915-9
0.56	18.00±0.30	[708.66±11.81]	1-2064915-8
0.56	17.00±0.30	[669.29±11.81]	1-2064915-7
0.56	16.00±0.30	[629.92±11.81]	1-2064915-6
0.55	15.00±0.15	[590.55±5.91]	1-2064915-5
0.55	14.00±0.15	[551.18±5.91]	1-2064915-4
0.55	13.00±0.15	[511.81±5.91]	1-2064915-3
0.54	12.00±0.15	[472.44±5.91]	1-2064915-2
0.54	11.00±0.15	[433.07±5.91]	1-2064915-1
0.54	10.00±0.15	[393.70±5.91]	1-2064915-0
0.53	9.00±0.15	[354.33±5.91]	2064915-9
0.53	8.00±0.15	[314.96±5.91]	2064915-8
0.52	7.00±0.08	[275.59±3.15]	2064915-7
0.52	6.00±0.08	[236.22±3.15]	2064915-6
0.52	5.00±0.08	[196.85±3.15]	2064915-5
0.51	4.00±0.08	[157.48±3.15]	2064915-4
0.51	3.00±0.05	[118.11±1.97]	2064915-3
0.51	2.00±0.05	[78.74±1.97]	2064915-2
0.50	1.00±0.05	[39.37±1.97]	2064915-1

MAX IL (dB) 1 L METERS [INCHES] PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	23MAR09		TE Connectivity																
DIMENSIONS: METERS [INCHES]		CHK	23MAR09																		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		J. DUNCAN																			
<table border="0"> <tr><td>0 PLC</td><td>±</td><td>-</td></tr> <tr><td>1 PLC</td><td>±</td><td>-</td></tr> <tr><td>2 PLC</td><td>±</td><td>-</td></tr> <tr><td>3 PLC</td><td>±</td><td>-</td></tr> <tr><td>4 PLC</td><td>±</td><td>-</td></tr> <tr><td>ANGLES</td><td>±</td><td>-</td></tr> </table>		0 PLC	±			-	1 PLC	±	-	2 PLC	±	-	3 PLC	±	-	4 PLC	±	-	ANGLES	±	-
0 PLC	±	-																			
1 PLC	±	-																			
2 PLC	±	-																			
3 PLC	±	-																			
4 PLC	±	-																			
ANGLES	±	-																			
MATERIAL	FINISH	APVD	23MAR09	NAME	CABLE ASSEMBLY, FIBER OPTIC, 50/125, OM3, 2 FIBER BREAKOUT CABLE, SEALED CIRCULAR LC DUPLEX (ODVA), BOTH ENDS																
		PRODUCT SPEC		SIZE	A2																
		APPLICATION SPEC		CAGE CODE	00779																
		WEIGHT	-	DRAWING NO	C-2064915																
CUSTOMER DRAWING		SCALE		SHEET	2 OF 2																
				REV	C																

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Fibre Optic Cable Assemblies](#) category:

Click to view products by [TE Connectivity](#) manufacturer:

Other Similar products are found below :

[7-21002-9](#) [760-1518](#) [FA04390-50-M-72-LC-N](#) [MLB 501 V RED](#) [MLB 501 V YELLOW](#) [1-3636-600-5208](#) [2061529-7](#) [1-6693182-0](#)
[1754898-1](#) [21055-6](#) [FXBSCSCE2LM002](#) [3000005](#) [3-21053-2](#) [MLB 2001 V RED](#) [MLB 2001 V YELLOW](#) [MLB 501 V BLACK](#) [5492011-6](#)
[106284-7000](#) [5492011-5](#) [5492011-8](#) [5492011-9](#) [8-21007-5](#) [2123524-2](#) [2123524-1](#) [106386-4447](#) [DFSM-SCSC-2M](#) [2123909-4](#) [2123909-8](#)
[106273-0629](#) [2125046-1](#) [2821236-3](#) [2821310-2](#) [2821310-3](#) [2821313-4](#) [FX2ERLNLNSNM0.5](#) [CF-980062-074](#) [CF-901200-394](#) [CF-980062-](#)
[073](#) [CF-980062-071](#) [CF-980062-075](#) [CF-980062-072](#) [17-300310-100](#) [2821236-2](#) [2821313-1](#) [G-FC-FC-S-002.0-DX-A-18-Y](#) [G-E2A-E2A-S-](#)
[003.0-SX-A-18-Y](#) [956-322-502214](#) [FA04474](#) [1083665](#) [1111540](#)