

SPECIFICATION CONTROL DRAWING

55A6315

TITLE ONE CONDUCTOR CABLE, SHIELDED, JACKETED
MEDIUM WEIGHT, 600 VOLT

DATE: 7-29-87


REVISION: A

This specification sheet forms a part of the latest issue of Raychem Specification 55A

COMPONENT WIRE - 55A0213

SHIELD - TIN-COATED COPPER

JACKET - RADIATION-CROSSLINKED,
MODIFIED ETFE

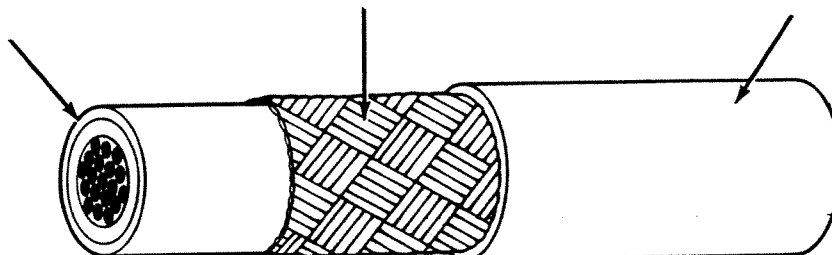

CABLE CONSTRUCTION DETAILS

PART NUMBER	CONDUCTOR SIZE (AWG)	SHIELD SIZE (AWG)	JACKET THICKNESS (in.)		CABLE DIAMETER (in.)		MAXIMUM WEIGHT (lbs/1000 ft)
			MINIMUM	NOMINAL	NOMINAL	MAXIMUM	
55A6315-22-*	22	38	.006	.008	.080	.085	7.5
55A6315-20-*	20	38	.006	.008	.088	.093	9.6
55A6315-18-*	18	38	.006	.008	.099	.104	12.8
55A6315-16-*	16	38	.006	.008	.106	.111	15.0
55A6315-14-*	14	38	.006	.008	.121	.127	21.1
55A6315-12-*	12	38	.006	.008	.139	.146	29.5

CABLE RATINGS AND ADDITIONAL REQUIREMENTS

TEMPERATURE RATING: 150°C

Maximum continuous conductor temperature
VOLTAGE RATING: 600 volts (rms)
ACCELERATED AGING: 300 ± 3°C for 7 hours
BLOCKING: 200 + 3°C for 6 hours
DIELECTRIC WITHSTAND: 1500 volts, 60 Hz

FLAMMABILITY:

Procedure 1, 3 seconds (maximum); 3 in. (maximum);
no flaming of facial tissue

JACKET COLOR: White preferred

JACKET ELONGATION AND TENSILE STRENGTH:

Elongation, 50% (minimum)
Tensile Strength, 5000 lbf/in² (minimum)

JACKET FLAWS:

Spark Test, 1000 volts, 60 Hz (rms), 100% test
Impulse Dielectric Test, 6.0 kV (peak), 100% test

LIFE CYCLE: 200 ± 3°C for 168 hours

LOW TEMPERATURE-COLD BEND: -65 ± 2°C for 4 hours

SHIELD COVERAGE: 85% (minimum)

THERMAL SHOCK: 300 ± 3°C for 6 hours

VOLTAGE WITHSTAND TEST: (After Accelerated Aging,
Immersion, Life Cycle, Low Temperature-Cold Bend
and Thermal Shock) 1000 volts, 60 Hz, 1 minute

PART NUMBER:

The "*" in the part numbers above shall be replaced
by color code designators with a dash separating the
component wire color from the jacket color.

Example: AWG 20, white component wire; white jacket:
55A6315-20-9-9.

NOTE: Nominal values are for information only.
Nominal values are not requirements.

COLORS AND COLOR CODE DESIGNATORS SHALL BE IN ACCORDANCE WITH MIL-STD-681.

DIMENSIONS ARE IN INCHES, AND UNLESS OTHERWISE DESIGNATED ARE NOMINAL.

Raychem

Raychem Corporation
300 Constitution Drive, Menlo Park, California 94025-1165
415) 361 3333 TWX 910 373 1728

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [TE Connectivity](#) manufacturer:

Other Similar products are found below :

[D38999/24FJ4AN](#) [570416-000](#) [CLTEQ-M81CE-SSRELAY-4-20V](#) [4-1195131-0](#) [650069-000](#) [SMD100-2](#) [358838-000](#) [CB-1022B-78](#)
[RM707012](#) [RP410012](#) [MMS42](#) [1-640426-8](#) [2EDL4CM](#) [DTS20W19-11PD-3028-LC](#) [RM202615](#) [NC6-P104-06](#) [MSPS103B](#) [DTS26F21-](#)
[41HE-LC](#) [DTS26F21-41AE](#) [DTS26F21-41PE-LC](#) [DTS26F21-11SE-3028-LC](#) [30DCB6](#) [1932144-1](#) [293545-4](#) [LVR125S](#) [MS27466T25F4PB](#)
[CKB-38-78010](#) [TR04AI-TINELLOCKRING](#) [1206SFF150F/63-2](#) [D38999/20JB35HA](#) [TE1500A2R2J](#) [D38999/20WC8BB](#) [DTS24F19-11SC-](#)
[3028-LC](#) [D38999/24WG11HA](#) [D38999/24WG11HN](#) [MS27467T21F11H](#) [DJT16E21-11HA](#) [MS27467T21F35J](#) [MS27467T21F11J](#)
[MS27467T21F16H-LC](#) [MS27467T21F35H](#) [MS27467T21F41H-LC](#) [1206SFH150F/24-2](#) [RP330024](#) [DJT16E21-11PA-LC](#) [DJT16E21-11HA-](#)
[LC](#) [DJT16E21-11AA](#) [MS27467T21B11JA](#) [DJT16E21-11JA](#) [MS27467T21B11JA-LC](#)