


- 1 ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS
- 2 TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADERS ARE HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD
- 3 THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING
- 4 POINT OF MEASUREMENT FOR PLATING THICKNESS
- 5 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

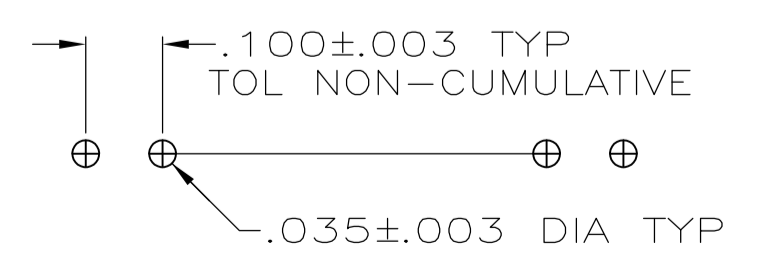

RECOMMENDED HOLE LAYOUT

	3.984	3.900	39	40	4-102972-0
5 OBSOLETE	3.884	3.800	38	39	3-102972-9
	3.784	3.700	37	38	3-102972-8
	3.684	3.600	36	37	3-102972-7
	3.584	3.500	35	36	3-102972-6
	3.484	3.400	34	35	3-102972-5
5 OBSOLETE	3.384	3.300	33	34	3-102972-4
	3.284	3.200	32	33	3-102972-3
5 OBSOLETE	3.184	3.100	31	32	3-102972-2
	3.084	3.000	30	31	3-102972-1
5 OBSOLETE	2.984	2.900	29	30	3-102972-0
	2.884	2.800	28	29	2-102972-9
	2.784	2.700	27	28	2-102972-8
	2.684	2.600	26	27	2-102972-7
	2.584	2.500	25	26	2-102972-6
5 SUPERCEDED BY 7-146276-3	2.484	2.400	24	25	2-102972-5
	2.384	2.300	23	24	2-102972-4
5 SUPERCEDED BY 7-146276-1	2.284	2.200	22	23	2-102972-3
	2.184	2.100	21	22	2-102972-2
5 OBSOLETE	2.084	2.000	20	21	2-102972-1
	1.984	1.900	19	20	2-102972-0
5 OBSOLETE	1.884	1.800	18	19	1-102972-9
	1.784	1.700	17	18	1-102972-8
5 OBSOLETE	1.684	1.600	16	17	1-102972-7
	1.584	1.500	15	16	1-102972-6
5 SUPERCEDED BY 6-146276-4	1.484	1.400	14	15	1-102972-5
	1.384	1.300	13	14	1-102972-4
5 OBSOLETE	1.284	1.200	12	13	1-102972-3
	1.184	1.100	11	12	1-102972-2
5 OBSOLETE	1.084	1.000	10	11	1-102972-1
	.984	.900	9	10	1-102972-0
5 OBSOLETE	.884	.800	8	9	102972-9
	.784	.700	7	8	102972-8
5 OBSOLETE	.684	.600	6	7	102972-7
	.584	.500	5	6	102972-6
5 OBSOLETE	.484	.400	4	5	102972-5
	.384	.300	3	4	102972-4
5 OBSOLETE	.284	.200	2	3	102972-3
	.184	.100	1	2	102972-2
5 OBSOLETE	.084	—	—	1	102972-1
	C	B	A	NO OF POSN	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED:	DIN H MOLL 10-9-87	TE Connectivity
	0. PLC ± -	CHK T. CLARK 10-12-87	NAME
	1. PLC ± -	APVD R. FLICKER 10-12-87	PRODUCT SPEC
	2. PLC ± -		APPLICATION SPEC
	3. PLC ± .005		SIZE
	4. PLC ± -		WEIGHT
	ANGLES ± -		RESTRICTED TO
MATERIAL: HOUSING: PLATE BEARING LAMP/PLUG/POST: COPPER ALLOY	FINISH: .00015 GOLD ON CONTACT AREA .0015-.0020 WHITE TIN (AUG) ON SOLDER TAIL. ALL OVER .00050 NICKEL	WEIGHT: —	SCALE: 4:1
CUSTOMER DRAWING		DRAWING NO: A1 00779	SHEET 1 OF 1
		DRAWING NO: 102972	REV H

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Headers & Wire Housings](#) category:*

*Click to view products by [TE Connectivity](#) manufacturer:*

Other Similar products are found below :

[892-18-020-10-001101](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [009176003701906](#) [0050291907](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#)  
[609-3404](#) [61062-3](#) [61082-181009](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [641991-4](#) [644827-2](#) [65817-](#)  
[010LF](#) [65817-015LF](#) [65863-015LF](#) [66207-023LF](#) [67095-007LF](#) [67601157](#) [68645-018](#) [68648-049](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-](#)  
[4853B](#) [707-5020](#) [707-5028](#) [71.350.2428.0](#) [71918-208LF](#) [71961-016LF](#) [733-134](#) [733-162](#) [754199-000](#) [760-3052](#) [79531-3000](#) [FCN-](#)  
[360C032-B](#) [FCN-367T-T012/H](#) [FCN-723D010/2](#) [80.063.4001.1](#) [800-90-010-10-002000](#) [801-43-002-10-013000](#) [801-43-006-10-002000](#)  
[801-93-011-10-001000](#)