

SPECIFICATION CONTROL DRAWING

44A9676

TITLE THREE CONDUCTOR CABLE, SHIELDED,
JACKETED, LIGHTWEIGHT, GENERAL PURPOSE, 600 VOLT

Date 2-26-97

Revision

This specification sheet forms a part of the latest issue of Raychem Specification 44.

COMPONENT WIRES - 44A9673 SHIELD - TIN-COATED COPPER JACKET - RADIATION-CROSSLINKED, MODIFIED PVF₂

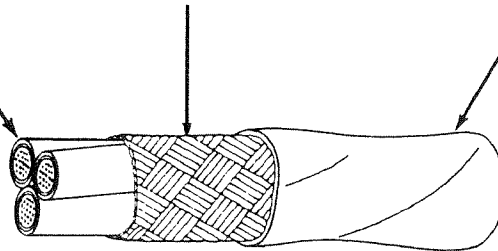


TABLE I. CABLE CONSTRUCTION DETAILS

PART NUMBER	CONDUCTOR SIZE (AWG)	SHIELD SIZE (AWG)	JACKET THICKNESS (in.)		OUTSIDE DIAMETER (in.)		MAXIMUM WEIGHT (lbs/1000 ft.)
			MINIMUM	NOMINAL	NOMINAL	MAXIMUM	
44A9676-24-*	24	36	.006	.008	.128	.134	15.2
44A9676-22-*	22	36	.006	.008	.143	.150	19.2
44A9676-20-*	20	36	.006	.008	.160	.168	25.2
44A9676-18-*	18	36	.007	.009	.184	.193	34.5

TABLE II. CABLE PERFORMANCE DETAILS

PART NUMBER	BEND TESTING			
	MANDREL DIAMETER (inch) (3%)		WEIGHT (lb) (± 3%)	
	IMMERSION LIFE CYCLE AND ACCELERATED AGING	COLD BEND	IMMERSION LIFE CYCLE AND ACCELERATED AGING	COLD BEND
44A9676-24-*	3.50	3.50	.563	2.25
44A9676-22-*	4.00	4.00	.563	4.50
44A9676-20-*	4.25	4.25	.563	4.50
44A9676-18-*	5.00	5.00	.750	4.50

CABLE RATINGS AND ADDITIONAL REQUIREMENTS

TEMPERATURE RATING: 150°C

Maximum continuous conductor temperature

VOLTAGE RATING: 600 volts (rms)

ACCELERATED AGING: 300 ± 3°C for 6 hours

BLOCKING: 150 ± 3°C for 6 hours

DIELECTRIC WITHSTAND: 2500 volts (rms), 60 Hz, 1 minute

FLAMMABILITY: 30 seconds (maximum); 3 in. (maximum), No flaming of facial tissue

JACKET COLOR: White preferred

JACKET ELONGATION AND TENSILE STRENGTH:

Elongation, 200% (minimum)

Tensile Strength, 4000 lbf/in² (minimum)

JACKET FLAWS:

Spark Test, 1.5 kV (rms), 60 Hz

Impulse Dielectric Test, 6.0 kV (peak)

LIFE CYCLE: 200 ± 3°C for 168 hours

LOW TEMPERATURE-COLD BEND: -65 ± 2°C for 4 hours

SHIELD COVERAGE: 85% (minimum)

VOLTAGE WITHSTAND TEST (POST ENVIRONMENTAL): 1000 volts (rms), 60 Hz, 1 minute

PART NUMBER:

The "" in the part numbers above shall be replaced by a color code designator with a slash separating the component wire colors and a dash separating the component wire colors from the jacket color.

Example: AWG 18, white, black and red component wires; White jacket; 44A9676-18-9/0/2-9

COLORS AND COLOR CODE DESIGNATORS SHALL BE IN ACCORDANCE WITH MIL-STD-681.

DIMENSIONS ARE IN INCHES, AND UNLESS OTHERWISE DESIGNATED ARE NOMINAL

Raychem

Raychem Corporation
300 Constitution Drive, Menlo Park, California 94025
1-800-2 Raychem Fax 1-415-361-6297

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Multi-Conductor Cables](#) category:

Click to view products by [TE Connectivity](#) manufacturer:

Other Similar products are found below :

[8916-GRY-100](#) [8917-BLK-100](#) [8917-GRN/YEL-100](#) [8918-GRN/YEL-100](#) [8920-BRN-1000](#) [8920-RED-1000](#) [89907-LT-DEC/GRY-500](#)
[CR3909-000](#) [CR3927-000](#) [01342.35T.01](#) [01364.35T.01](#) [003201-000](#) [CS2885-000](#) [CS8782-000](#) [CS9912-000](#) [6200UE-NAT-U1000](#) [CTC-](#)
[0062-20-9/5-9](#) [CTC-0062-22-9/5-9](#) [6304FE-877-U500](#) [6309UE-877-1000](#) [6320UE-NAT-U1000](#) [644833-000](#) [6502FE 8771000](#) [6504UE-877-](#)
[U1000](#) [CW9530-000](#) [CX6543-000](#) [CXA-0066-20-4-9CS2973](#) [CXA-0078-16-1-9CS2405](#) [CXA-0078-22-4-9CS2405](#) [CXA-0078-24-4-](#)
[9CS2405](#) [CXA-0140-16-6/9-9CS2405](#) [CY0660-000](#) [706/2R-BLACK-EACH](#) [720451-000](#) [730859-000](#) [MCC-USB-4-250](#) [752687-000](#)
[768146-000](#) [773159-000](#) [7934A-BLK-1000](#) [8125-CHR-100](#) [8164-CHR-1000](#) [820457-000](#) [8205-CHR-1000](#) [8240-BLK-U1000](#) [82723-NAT-](#)
[1000](#) [82907-NAT-500](#) [83003-YEL-500](#) [83005-WHT-500](#) [83006-DK-GRN-100](#)