
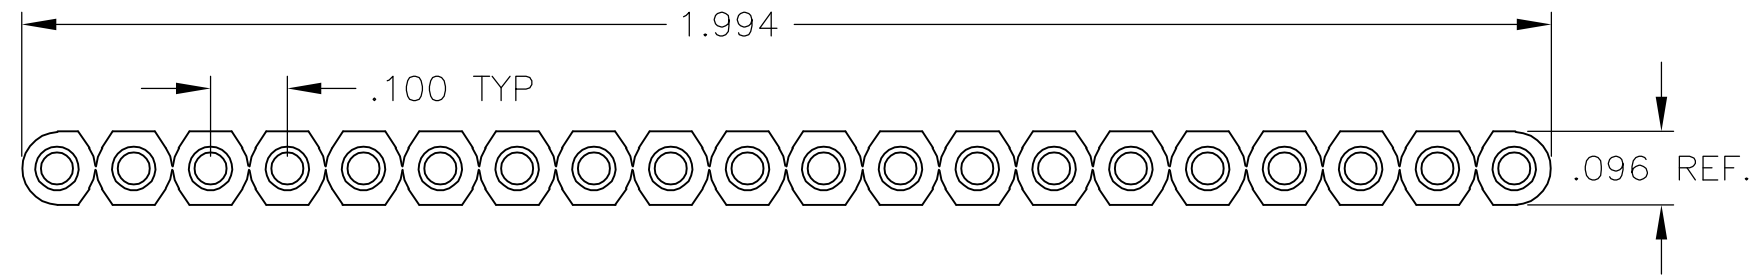


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION		DATE	DWN	APVD	
	0	EC 0G3C-0388-03		14SEP2004	BSV	KW	

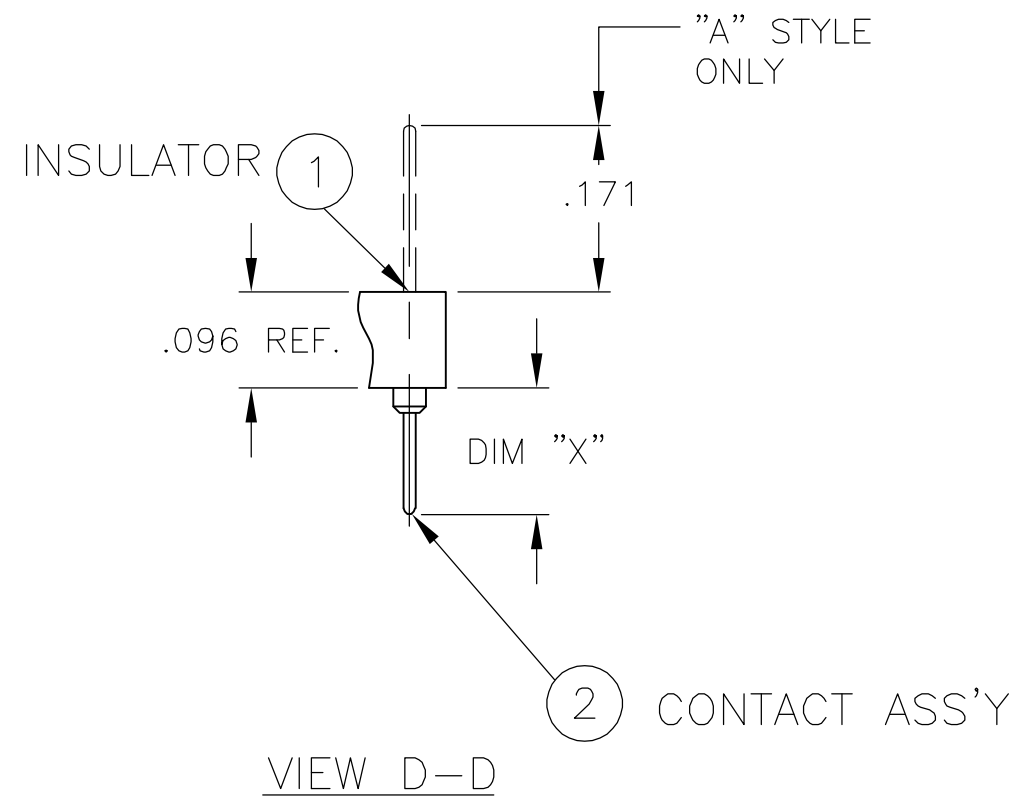


LSG STYLE	TAIL TYPE	DIM "X"
D	.125 P.C.	.210/.180
A	ADAPTOR PIN	.211/.183
D	.180 P.C.	.265/.235
F1	1 1/2 LEVEL W.W	.370/.340
F2	2 LEVEL W.W	.480/.450
F	3 LEVEL W.W	.620/.590

- NOTES:
 MATERIAL & FINISH:
 1. INSULATOR :
 a) ADAPTOR PINS .125 & .180 P.C TAILS- THERMOPLASTIC POLYESTER(BLACK) P.E.T RATED 94V-0.
 b) W.W TAILS - THERMOPLASTICPOLYESTER (BALCK) P.B.T RATED 94V-0
 2. CONTACT ASS'Y - SEE PAGE 2.
 3. (*) DENOTES PACKAGING TO BE 100063-54.
 4. POSITIONS 1 THRU 4 TO BE PACKAGED IN ANTISTATIC BAG IN QTY'S OF 2,500 PCS

0.083	0.079	0.075	0.071	0.067	0.063	0.058	0.054	0.05	0.046	0.042	0.038	0.033	0.029	0.025	0.02	(SEE NOTE 4)				PACKAGING (NOT SHOWN)	100063-23	3
20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	CONTACT ASSY. (P.C TAIL LSG'S)	SEE PAGES 2,4, & 6	2
1	1	1	1	1	1	1	1	1	1	0.5	0.5	0.5	0.5	0.33	0.25	0.2	0.17	0.1	0.05	INSULATOR (ADAPTOR PINS .125 & .180 P.C TAILS)	820-5P1	1
QTY.	QTY.	QTY.	QTY.	QTY.	QTY.	QTY.	QTY.	QTY.	QTY.	QTY.	QTY.	QTY.	QTY.	QTY.	QTY.	QTY.	QTY.	QTY.	QTY.	POSITIONS	PART NUMBER	ITEM NO.
20	19	18	17	16	15	14	13	12	11	10	09	08	07	06	05	04	03	02	01	B.O.M FOR P.C. TAIL SOCKET ASSEMBLIES		

0.083	0.079	0.075	0.071	0.067	0.063	0.058	0.054	0.05	0.046	0.042	0.038	0.033	0.029	0.025	0.02	(SEE NOTE 4)				PACKAGING (NOT SHOWN)	100063-23	3
20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	CONTACT ASSY. (W.W. TAIL LSG'S)	SEE PAGES 2,4, & 6	2
1	1	1	1	1	1	1	1	1	1	0.5	0.5	0.5	0.5	0.33	0.25	0.2	0.17	0.1	0.05	INSULATOR (W.W. TAILS)	820-5P1	1
QTY.	QTY.	QTY.	QTY.	QTY.	QTY.	QTY.	QTY.	QTY.	QTY.	QTY.	QTY.	QTY.	QTY.	QTY.	QTY.	QTY.	QTY.	QTY.	QTY.	POSITIONS	PART NUMBER	ITEM NO.
20	19	18	17	16	15	14	13	12	11	10	09	08	07	06	05	04	03	02	01	B.O.M FOR P.C. TAIL SOCKET ASSEMBLIES		

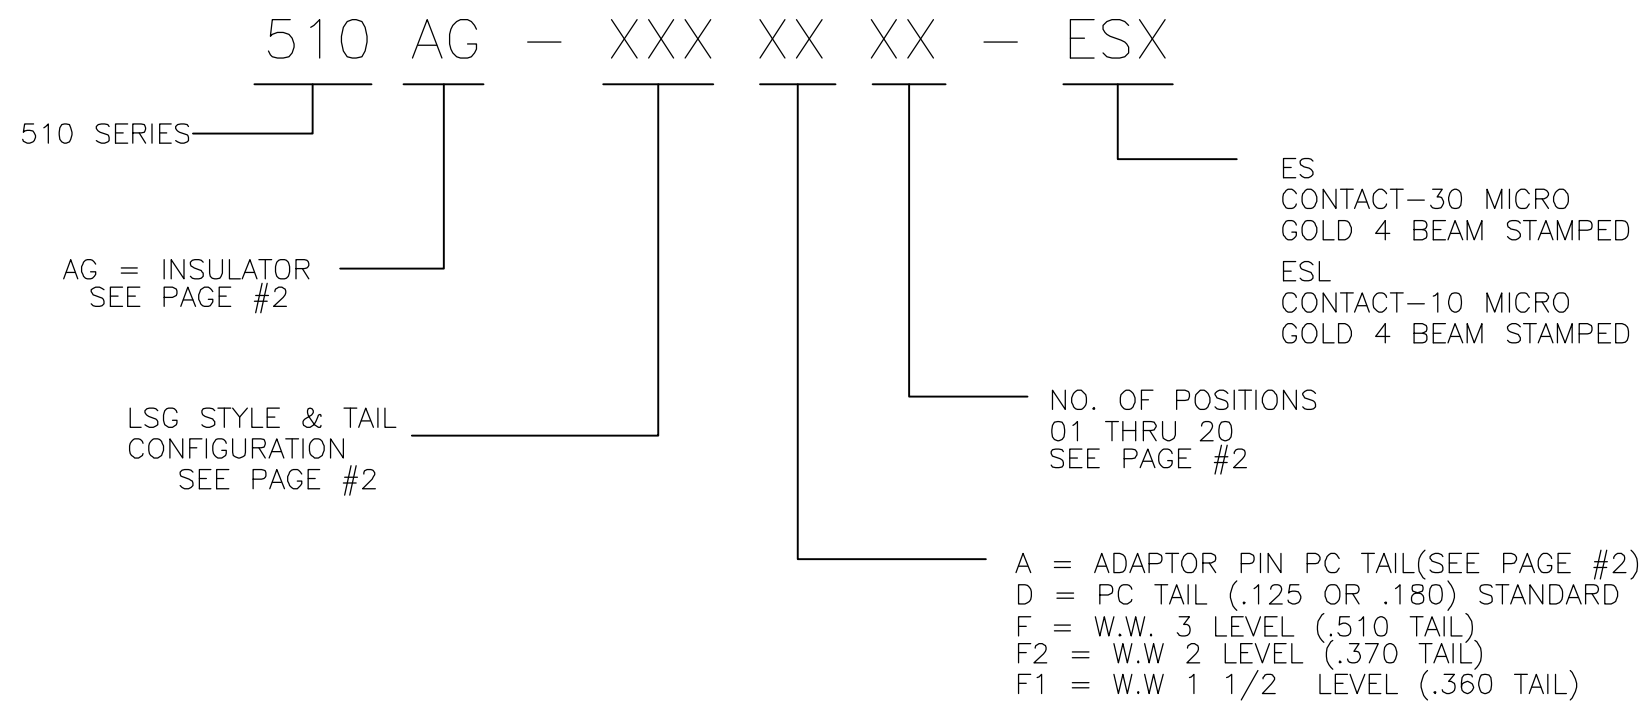

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN BSV	14SEP2004	tyco Electronics Tyco Electronics Corporation Harisburg, Pa 17105-3808	
DIMENSIONS: INCHES		CHK -	APVD K WRIGHT	NAME ASSEMBLY SOCKET (.510 SERIES. S.I.P)	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD -	PRODUCT SPEC -	SIZE CAGE CODE DRAWING NO RESTRICTED TO	
0 PLC ± -		APVD -	APPLICATION SPEC -	A2 00779 C=1437530-5	
1 PLC ± -		APVD -	WEIGHT -	SCALE 4:1 SHEET 1 OF 3 REV 0	
2 PLC ± -		APVD -	CUSTOMER DRAWING		
3 PLC ± -		APVD -			
4 PLC ± -		APVD -			
ANGLES ± -		APVD -			
FINISH -		APVD -			

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD		
AD	00	SEE SHEET 1	-	-	-		

(D) STANDARD .125 P.C TAIL LSG CONFIGURATIONS AND PLATING

LSG-1AGXXX-1
 SLEEVE - TAPERED ENTRY BRASS. GOLD PLATE 10 MICRON AVG.
 CONTACT - TAPERED ENTRY BERY. COPPER. GOLD PLATE 30 MICRON AVG.

LSG-1AGXXX-14
 SLEEVE - TAPERED ENTRY COPPER. TIN/LEAD PLATE.
 CONTACT - TAPERED ENTRY BERY. COPPER. GOLD PLATE 30 MICRON AVG.

LSG-1AGXXX-27
 SLEEVE - TAPERED ENTRY COPPER. TIN/LEAD PLATE.
 CONTACT - TAPERED ENTRY BERY. TIN/LEAD PLATE.

LSG-1AGXXX-30
 SLEEVE - TAPERED ENTRY COPPER. TIN/LEAD PLATE.
 CONTACT - TAPERED ENTRY BERY. COPPER. GOLD PLATE 10 MICRON AVG.

LSG-1AGXXX-31
 SLEEVE - TAPERED ENTRY COPPER. TIN/LEAD PLATE.
 CONTACT - TAPERED ENTRY BERY. COPPER. GOLD PLATE 50 MICRON AVG.

LSG-1AGXXX-32
 SLEEVE - TAPERED ENTRY BRASS GOLD PLATE. 10 MICRON AVG.
 CONTACT - TAPERED ENTRY BERY. COPPER. GOLD PLATE 10 MICRON AVG.

LSG-1AGXXX-33
 SLEEVE - TAPERED ENTRY COPPER. GOLD PLATE. 10 MICRON AVG.
 CONTACT - TAPERED ENTRY BERY. COPPER. GOLD PLATE 50 MICRON AVG.

LSG-1AGXXX-35
 SLEEVE - TAPERED ENTRY COPPER. GOLD PLATE. 10 MICRON AVG.
 CONTACT - TAPERED ENTRY BERY. COPPER. TIN/LEAD PLATE.
 (ONLY AVAILABLE WITH LSG-1AG106-XX)

LSG-1AGXXX-36
 SLEEVE - TAPERED ENTRY COPPER. TIN/LEAD PLATE.
 CONTACT - TAPERED ENTRY BERY. COPPER. GOLD PLATE 50 MICRON AVG.
 (ONLY AVAILABLE WITH LSG-1AG106-XX)

(D) STANDARD .125 P.C. TAIL LSG DESCRIPTIONS

LSG-1AG74-XX
 SLEEVE - MACHINED TAPERED ENTRY BRASS.
 CONTACT - NORMAL FORCE :4 BEAM MACHINED.

LSG-1AG75-XX
 SLEEVE - MACHINED TAPERED ENTRY BRASS.
 CONTACT - NORMAL FORCE :4 BEAM STAMPED.

LSG-1AG106-XX
 SLEEVE - COLD-HEADED TAPERED ENTRY COPPER.
 CONTACT - NORMAL FORCE :4 BEAM MACHINED.

LSG-1AG255-XX
 SLEEVE - COLD HEADED TAPERED ENTRY COPPER.
 CONTACT - NORMAL FORCE :4 BEAM STAMPED.

LSG-1AG344-XX
 SLEEVE - MACHINED TAPERED ENTRY BRASS.
 CONTACT - NORMAL FORCE :4 BEAM MACHINED.

LSG-1AG106-XX
 SLEEVE - COLD-HEADED TAPERED ENTRY COPPER.
 CONTACT - NORMAL FORCE :4 BEAM MACHINED.

(D) STANDARD .180 P.C TAIL LSG CONFIGURATIONS AND PLATING

LSG-1AGXXX-1
 SLEEVE - TAPERED ENTRY BRASS. GOLD PLATE 10 MICRON AVG.
 CONTACT - TAPERED ENTRY BERY. COPPER. GOLD PLATE 30 MICRON AVG.

LSG-1AGXXX-14
 SLEEVE - TAPERED ENTRY BRASS. TIN/LEAD PLATE.
 CONTACT - TAPERED ENTRY BERY. COPPER. GOLD PLATE 30 MICRON AVG.

LSG-1AGXXX-27
 SLEEVE - TAPERED ENTRY BRASS. TIN/LEAD PLATE.
 CONTACT - TAPERED ENTRY BERY. TIN/LEAD PLATE.

LSG-1AGXXX-30
 SLEEVE - TAPERED ENTRY BRASS. TIN/LEAD PLATE.
 CONTACT - TAPERED ENTRY BERY. COPPER. GOLD PLATE 50 MICRON AVG.

LSG-1AGXXX-31
 SLEEVE - TAPERED ENTRY COPPER. TIN/LEAD PLATE.
 CONTACT - TAPERED ENTRY BERY. COPPER. GOLD PLATE 50 MICRON AVG.

LSG-1AGXXX-32
 SLEEVE - TAPERED ENTRY BRASS GOLD PLATE. 10 MICRON AVG.
 CONTACT - TAPERED ENTRY BERY. COPPER. GOLD PLATE 10 MICRON AVG.

LSG-1AGXXX-33
 SLEEVE - TAPERED ENTRY BRASS. GOLD PLATE. 10 MICRON AVG.
 CONTACT - TAPERED ENTRY BERY. COPPER. GOLD PLATE 50 MICRON AVG.

(A) ADAPTOR PIN -P.C. TAIL PLATING

8128-XXXP3 - GOLD PLATED. 10 MICRON AVG.

8128-XXXP5 - TIN/LEAD PLATED

(D) STANDARD .180 P.C. TAIL LSG DESCRIPTIONS

LSG-1AG76-XX
 SLEEVE - MACHINED TAPERED ENTRY BRASS.
 CONTACT - NORMAL FORCE :4 BEAM MACHINED.

LSG-1AG133-XX
 SLEEVE - MACHINED TAPERED ENTRY BRASS.
 CONTACT - NORMAL FORCE :4 BEAM STAMPED.

LSG-1AG345-XX
 SLEEVE - MACHINED TAPERED ENTRY BRASS.
 CONTACT - NORMAL FORCE :4 BEAM MACHINED.

(A) ADAPTOR PIN -P.C. TAIL PIN DESCRIPTION

8128-195PX - MACHINED BRASS.

(F) STANDARD .WIREWRAP TAIL LSG CONFIGURATIONS AND PLATING

LSG-1AGXXX-1
 SLEEVE - TAPERED ENTRY BERY. COPPER. GOLD PLATE 10 MICRON AVG.
 CONTACT - TAPERED ENTRY BERY. COPPER. GOLD PLATE 30 MICRON AVG.

LSG-1AGXXX-14
 SLEEVE - TAPERED ENTRY BERY. COPPER. TIN/LEAD PLATE.
 CONTACT - TAPERED ENTRY BERY. COPPER. GOLD PLATE 30 MICRON AVG.

LSG-1AGXXX-27
 SLEEVE - TAPERED ENTRY BERY. COPPER. TIN/LEAD PLATE.
 CONTACT - TAPERED ENTRY BERY. TIN/LEAD PLATE.

LSG-1AGXXX-30
 SLEEVE - TAPERED ENTRY BERY. COPPER. TIN/LEAD PLATE.
 CONTACT - TAPERED ENTRY BERY. COPPER. GOLD PLATE 10 MICRON AVG.

LSG-1AGXXX-31
 SLEEVE - TAPERED ENTRY BERY. COPPER. TIN/LEAD PLATE.
 CONTACT - TAPERED ENTRY BERY. COPPER. GOLD PLATE 50 MICRON AVG.

LSG-1AGXXX-32
 SLEEVE - TAPERED ENTRY BERY. COPPER. GOLD PLATE. 10 MICRON AVG.
 CONTACT - TAPERED ENTRY BERY. COPPER. GOLD PLATE 10 MICRON AVG.

LSG-1AGXXX-33
 SLEEVE - TAPERED ENTRY BERY. COPPER. GOLD PLATE. 10 MICRON AVG.
 CONTACT - TAPERED ENTRY BERY. COPPER. GOLD PLATE 50 MICRON AVG.

(F) STANDARD WIREWRAP TAIL LSG DESCRIPTIONS

F LSG-1FG41-XX
 F2 LSG-1FG40-XX
 F1 LSG-1FG46-XX
 SLEEVE - TAPERED ENTRY BERY. COPPER.
 CONTACT - NORMAL FORCE 4 BEAM MACHINED.

F LSG-1FG58-XX
 F2 LSG-1FG59-XX
 F1 LSG-1FG126-XX
 SLEEVE - TAPERED ENTRY BERY. COPPER.
 CONTACT - LOW FORCE : 4 BEAM MACHINED.

F LSG-1FG86-XX
 F2 LSG-1FG87-XX
 F1 LSG-1FG43-XX
 SLEEVE - TAPERED ENTRY BERY. COPPER.
 CONTACT - NORMAL FORCE 4 BEAM STAMPED.

F LSG-1FG84-XX
 F2 LSG-1FG83-XX
 SLEEVE - TAPERED ENTRY BERY. COPPER.
 CONTACT - NORMAL FORCE 4 BEAM MACHINED.
 *(F1 NOT NEEDED AT PRESENT)

F LSG-1FG162-XX
 F2 LSG-1FG161-XX
 SLEEVE - TAPERED ENTRY BERY. COPPER.
 CONTACT - NORMAL FORCE : 4 BEAM MACHINED.
 *(F1 NOT NEEDED AT PRESENT)

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN BSV	14SEP2004	tyco Tyco Electronics Corporation	
DIMENSIONS: INCHES		CHK -	APVD K WRIGHT	Harisburg, Pa 17105-3808	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD K WRIGHT	PRODUCT SPEC	NAME 0 (.510 SERIES. S.I.P)	
0 PLC ± -		APPLICATION SPEC		SIZE	RESTRICTED TO
1 PLC ± -				CAGE CODE	
2 PLC ± -				DRAWING NO	
3 PLC ± -				SCALE	
4 PLC ± -				SHEET	
ANGLES ± -				OF	
MATERIAL	FINISH	WEIGHT	A2	00779	REV
			C=1437530-5		0
CUSTOMER DRAWING			SCALE	1:1	SHEET
				3	OF
				3	REV
					0

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for IC & Component Sockets category:

Click to view products by TE Connectivity manufacturer:

Other Similar products are found below :

[0066-3-17-15-30-14-02-0](#) [670](#) [672](#) [673](#) [694-13-640-00-672-000](#) [712-93-120-41-001000](#) [714-93-104-31-018000](#) [8059-4G1-LF](#) [807-22-001-10-001101](#) [807-22-001-10-006101](#) [807-22-001-30-011101](#) [807-22-001-30-012101](#) [807-22-001-30-013101](#) [807-22-001-30-014101](#) [8-1437531-4](#) [8150-6P10](#) [833-93-034-10-001000](#) [851-41-006-10-001000](#) [851-43-008-20-001000](#) [851-43-014-20-001000](#) [851-93-006-20-001000](#) [851-93-010-20-001000](#) [853-43-020-10-001000](#) [86.010.0053.0](#) [116-43-308-41-007000](#) [PX-68LCC](#) [121-13-318-41-001000](#) [121-13-320-41-001000](#) [121-13-308-41-001000](#) [123-43-314-41-801000](#) [123-43-420-41-001000](#) [122-13-316-41-001000](#) [123-13-624-41-001000](#) [123-43-306-41-001000](#) [12-3513-11](#) [123-91-320-41-001000](#) [126-43-310-41-002000](#) [AKSUN 37V-T](#) [1437503-9](#) [1437504-1](#) [146-44-308-41-013000](#) [146-43-308-41-012000](#) [160-10-308-00-001000](#) [160-40-320-00-001000](#) [214-99-306-01-670800](#) [232-1270-02-0602](#) [2-382761-4](#) [2-5331677-4](#) [2-640360-3](#) [2801-2-00-50-00-00-07-0](#)