
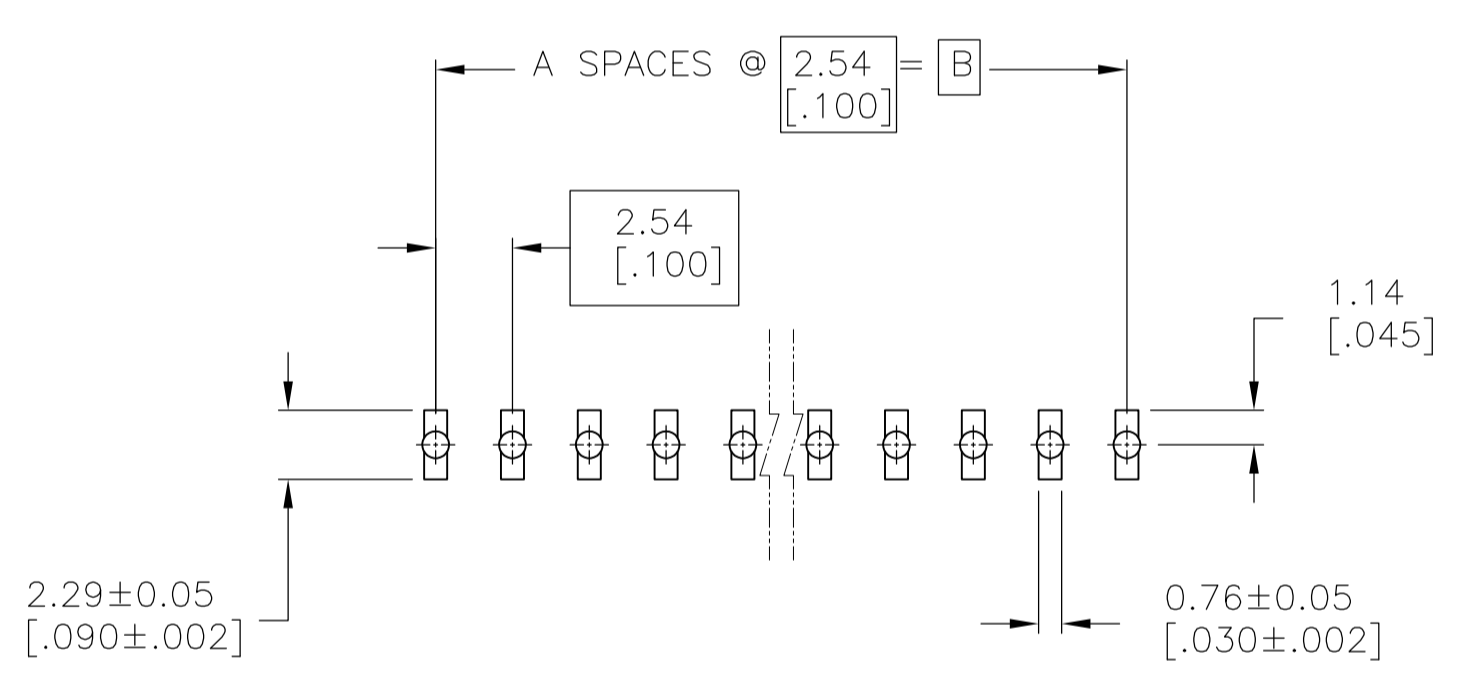


REVISIONS					
P	LTR	DESCRIPTION	DATE	DMN	APVO
H1	REVISED PER ECO-16-012733		01SEP2016	NK	MM

- 1 ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS.
- 2 TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADER IS HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD.
- 3 THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING.
- 4 PLATING: 0.00254-0.00508 [.000100-.000200] MATTE TIN LEAD, OVER 0.00127 [.000050] NICKEL.
- 5 HOUSING: LCP, COLOR-BLACK. POSTS: COPPER ALLOY.
- 6 PLATING: 0.00254-0.00508 [.000100-.000200] MATTE TIN OVER 0.00127 [.000050] NICKEL.
- 7 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI.

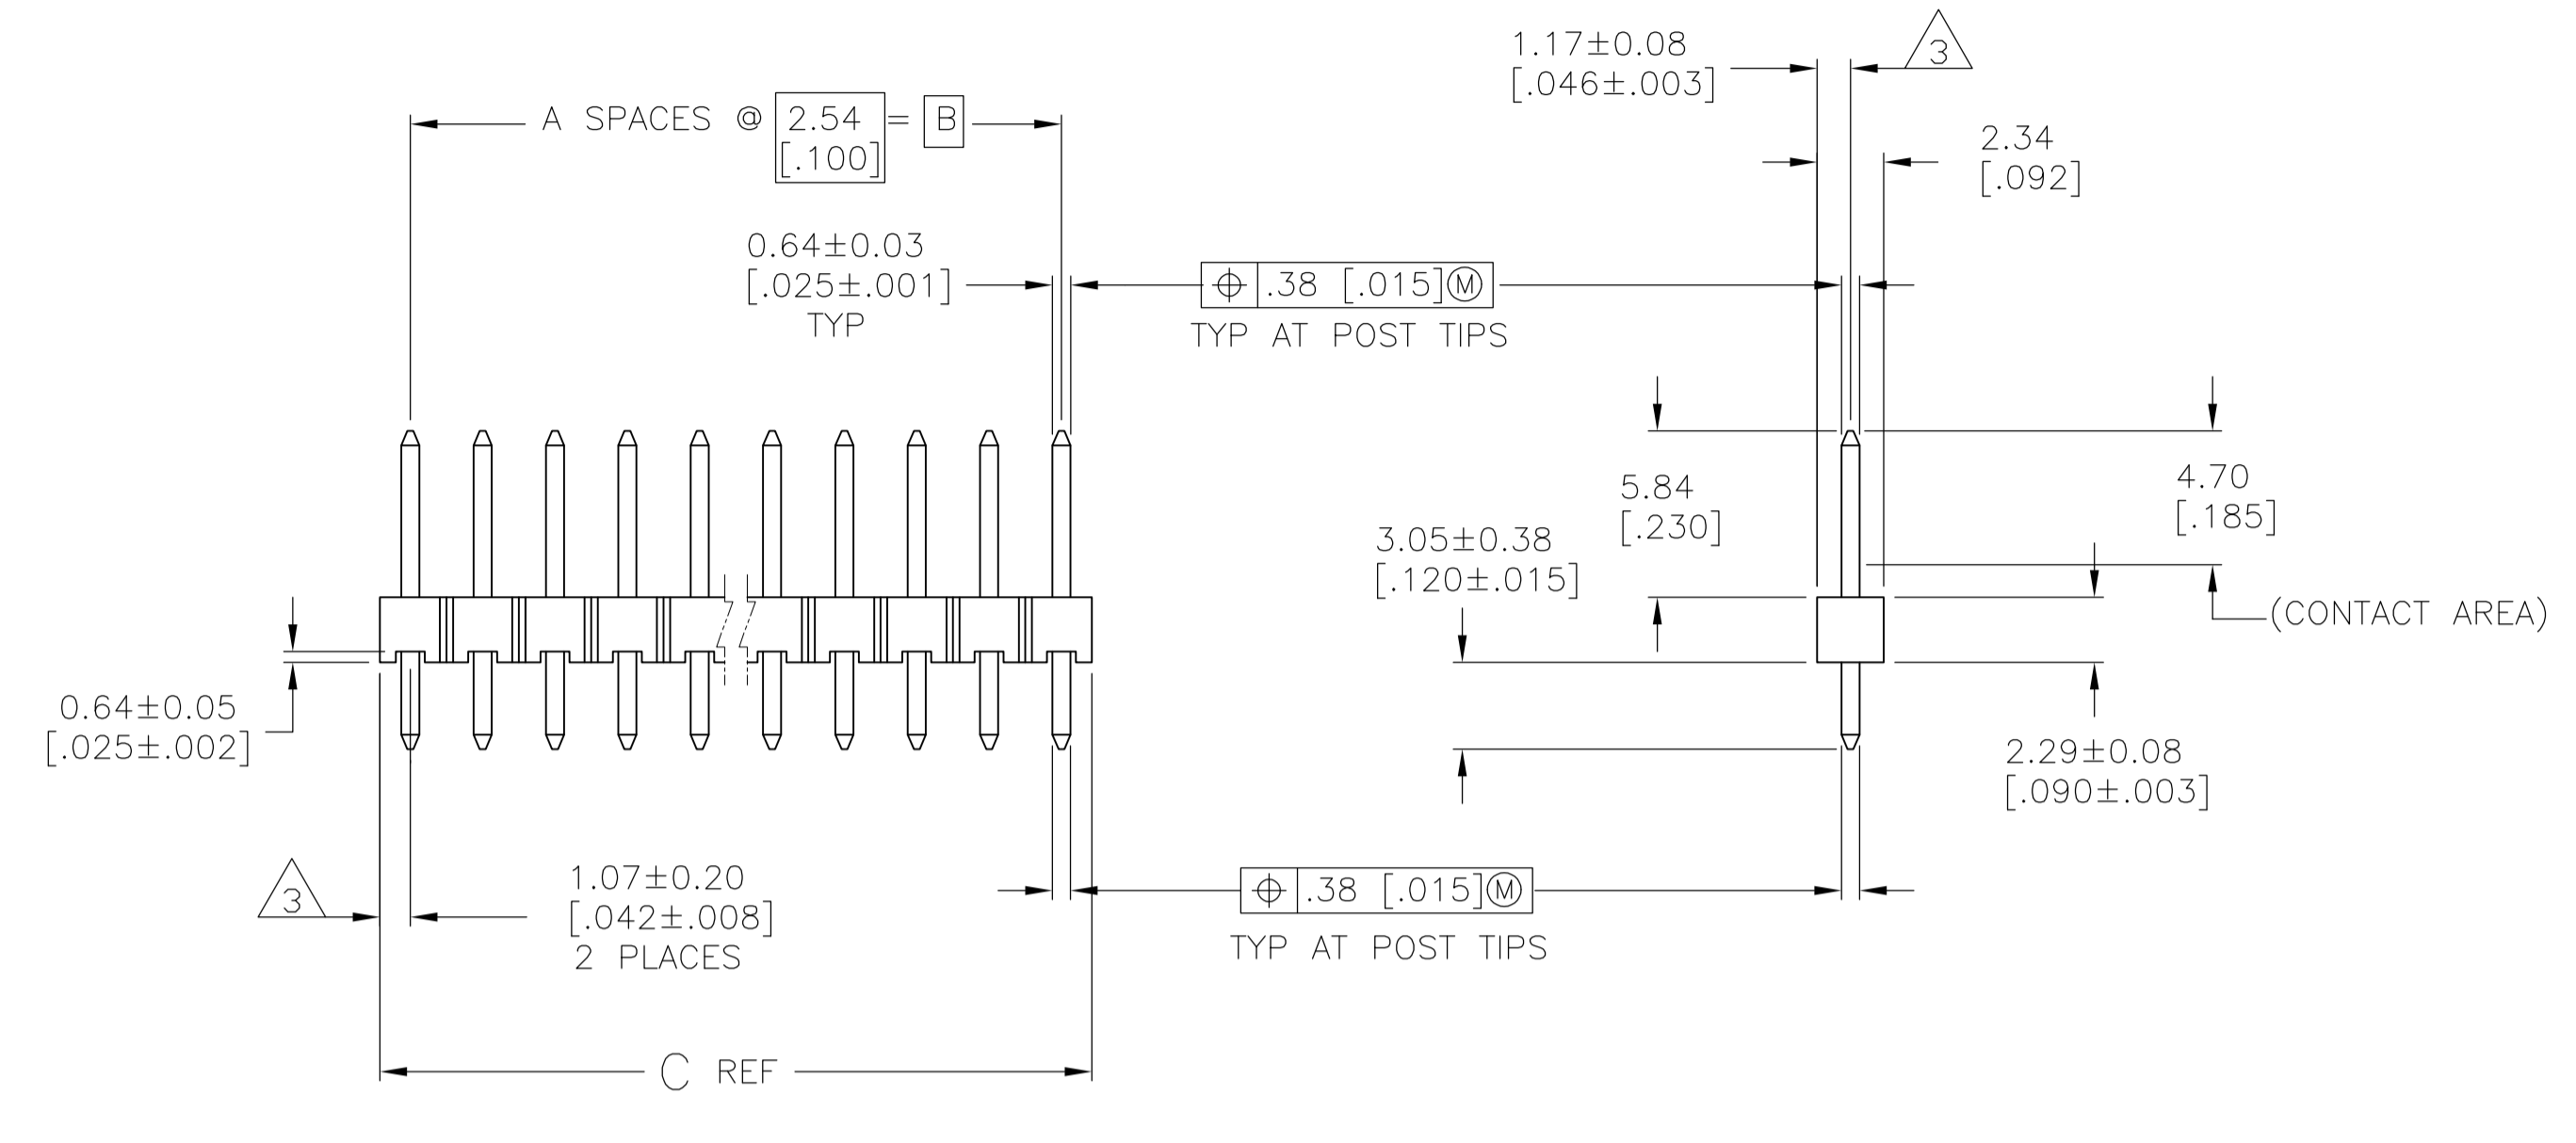

RECOMMENDED PC BOARD MOUNTING DIMENSIONS FOR .063 [.160] THICK PC BOARD AND .012 [.305] STENCIL THICK.

PLATING	C	B	A	NO. OF POSITIONS	PART NUMBER
6	101.19 [3.984]	99.06 [3.900]	39	40	9-146278-0
6	98.65 [3.884]	96.52 [3.800]	38	39	7-146278-9
6	96.11 [3.784]	93.98 [3.700]	37	38	7-146278-8
6	93.57 [3.684]	91.44 [3.600]	36	37	7-146278-7
6	91.03 [3.584]	88.90 [3.500]	35	36	7-146278-6
6	88.49 [3.484]	86.36 [3.400]	34	35	7-146278-5
6	85.95 [3.384]	83.82 [3.300]	33	34	7-146278-4
6	83.41 [3.284]	81.28 [3.200]	32	33	7-146278-3
6	80.87 [3.184]	78.74 [3.100]	31	32	7-146278-2
6	78.33 [3.084]	76.20 [3.000]	30	31	7-146278-1
6	75.79 [2.984]	73.66 [2.900]	29	30	7-146278-0
6	73.25 [2.884]	71.12 [2.800]	28	29	7-146278-9
6	70.71 [2.784]	68.58 [2.700]	27	28	7-146278-8
6	68.17 [2.684]	66.04 [2.600]	26	27	7-146278-7
6	65.63 [2.584]	63.50 [2.500]	25	26	7-146278-6
6	63.09 [2.484]	60.96 [2.400]	24	25	7-146278-5
6	60.55 [2.384]	58.42 [2.300]	23	24	7-146278-4
6	58.01 [2.284]	55.88 [2.200]	22	23	7-146278-3
6	55.47 [2.184]	53.34 [2.100]	21	22	7-146278-2
6	52.93 [2.084]	50.80 [2.000]	20	21	7-146278-1
6	50.39 [1.984]	48.26 [1.900]	19	20	7-146278-0
6	47.85 [1.884]	45.72 [1.800]	18	19	6-146278-9
6	45.31 [1.784]	43.18 [1.700]	17	18	6-146278-8
6	42.77 [1.684]	40.64 [1.600]	16	17	6-146278-7
6	40.23 [1.584]	38.10 [1.500]	15	16	6-146278-6
6	37.69 [1.484]	35.56 [1.400]	14	15	6-146278-5
6	35.15 [1.384]	33.02 [1.300]	13	14	6-146278-4
6	32.61 [1.284]	30.48 [1.200]	12	13	6-146278-3
6	30.07 [1.184]	27.94 [1.100]	11	12	6-146278-2
6	27.53 [1.084]	25.40 [1.000]	10	11	6-146278-1
6	24.99 [.984]	22.86 [.900]	9	10	6-146278-0
6	22.45 [.884]	20.32 [.800]	8	9	5-146278-9
6	19.91 [.784]	17.78 [.700]	7	8	5-146278-8
6	17.37 [.684]	15.24 [.600]	6	7	5-146278-7
6	14.83 [.584]	12.70 [.500]	5	6	5-146278-6
6	12.29 [.484]	10.16 [.400]	4	5	5-146278-5
6	9.75 [.384]	7.62 [.300]	3	4	5-146278-4
6	7.21 [.284]	5.08 [.200]	2	3	5-146278-3
6	4.67 [.184]	2.54 [.100]	1	2	5-146278-2
6	2.13 [.084]	[-]	0	1	5-146278-1

PLATING	C	B	A	NO. OF POSITIONS	PART NUMBER
4	101.19 [3.984]	99.06 [3.900]	39	40	4-146278-0
4	98.65 [3.884]	96.52 [3.800]	38	39	3-146278-9
4	96.11 [3.784]	93.98 [3.700]	37	38	3-146278-8
4	93.57 [3.684]	91.44 [3.600]	36	37	3-146278-7
4	91.03 [3.584]	88.90 [3.500]	35	36	3-146278-6
4	88.49 [3.484]	86.36 [3.400]	34	35	3-146278-5
4	85.95 [3.384]	83.82 [3.300]	33	34	3-146278-4
4	83.41 [3.284]	81.28 [3.200]	32	33	3-146278-3
4	80.87 [3.184]	78.74 [3.100]	31	32	3-146278-2
4	78.33 [3.084]	76.20 [3.000]	30	31	3-146278-1
4	75.79 [2.984]	73.66 [2.900]	29	30	3-146278-0
4	73.25 [2.884]	71.12 [2.800]	28	29	2-146278-9
4	70.71 [2.784]	68.58 [2.700]	27	28	2-146278-8
4	68.17 [2.684]	66.04 [2.600]	26	27	2-146278-7
4	65.63 [2.584]	63.50 [2.500]	25	26	2-146278-6
4	63.09 [2.484]	60.96 [2.400]	24	25	2-146278-5
4	60.55 [2.384]	58.42 [2.300]	23	24	2-146278-4
4	58.01 [2.284]	55.88 [2.200]	22	23	2-146278-3
4	55.47 [2.184]	53.34 [2.100]	21	22	2-146278-2
4	52.93 [2.084]	50.80 [2.000]	20	21	2-146278-1
4	50.39 [1.984]	48.26 [1.900]	19	20	2-146278-0
4	47.85 [1.884]	45.72 [1.800]	18	19	1-146278-9
4	45.31 [1.784]	43.18 [1.700]	17	18	1-146278-8
4	42.77 [1.684]	40.64 [1.600]	16	17	1-146278-7
4	40.23 [1.584]	38.10 [1.500]	15	16	1-146278-6
4	37.69 [1.484]	35.56 [1.400]	14	15	1-146278-5
4	35.15 [1.384]	33.02 [1.300]	13	14	1-146278-4
4	32.61 [1.284]	30.48 [1.200]	12	13	1-146278-3
4	30.07 [1.184]	27.94 [1.100]	11	12	1-146278-2
4	27.53 [1.084]	25.40 [1.000]	10	11	1-146278-1
4	24.99 [.984]	22.86 [.900]	9	10	1-146278-0
4	22.45 [.884]	20.32 [.800]	8	9	1-146278-9
4	19.91 [.784]	17.78 [.700]	7	8	1-146278-8
4	17.37 [.684]	15.24 [.600]	6	7	1-146278-7
4	14.83 [.584]	12.70 [.500]	5	6	1-146278-6
4	12.29 [.484]	10.16 [.400]	4	5	1-146278-5
4	9.75 [.384]	7.62 [.300]	3	4	1-146278-4
4	7.21 [.284]	5.08 [.200]	2	3	1-146278-3
4	4.67 [.184]	2.54 [.100]	1	2	146278-2
4	2.13 [.084]	[-]	0	1	146278-1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DTN: I. HOFFMAN 23 MAY 95
 CHK: G. DUBNICZKI 07 JUN 95
 APVO: G. DUBNICZKI 07 JUN 95

DIMENSIONS: mm [INCHES]

TOLERANCES UNLESS OTHERWISE SPECIFIED:
 0 PLC ± -
 1 PLC ± -
 2 PLC ± 0.51[.02]
 3 PLC ± 0.12[.005]
 4 PLC ± 0.012[.0005]
 ANGLES ± -

MATERIAL: 5

FINISH: SEE TABLE

WEIGHT: -

SIZE: A1

SCALE: 4:1

SHEET: 1 OF 1

REV: H1

STE TE Connectivity

HEADER ASSEMBLY, MOD II, BREAKAWAY, SINGLE ROW, HIGH TEMPERATURE, VERTICAL, W/.025 SQ. POSTS

00779 146278

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [TE Connectivity](#) manufacturer:

Other Similar products are found below :

[892-18-020-10-001101](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [009176003701906](#) [0050291907](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#)
[609-3404](#) [61062-3](#) [61082-181009](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [641991-4](#) [644827-2](#) [65817-](#)
[010LF](#) [65817-015LF](#) [65863-015LF](#) [66207-023LF](#) [67095-007LF](#) [67601157](#) [68645-018](#) [68648-049](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-](#)
[4853B](#) [707-5020](#) [707-5028](#) [71.350.2428.0](#) [71918-208LF](#) [71961-016LF](#) [733-134](#) [733-162](#) [754199-000](#) [760-3052](#) [787-8014-00](#) [79531-3000](#)
[FCN-360C032-B](#) [FCN-367T-T012/H](#) [FCN-723D010/2](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [800-90-010-10-002000](#) [801-43-002-10-013000](#)