


REV	DESCRIPTION	DATE	APPROVED
C	REVISE PER DCR# T-30858	5/13/2002	M. PIOZET



DESCRIPTION	1" INSERT	2" INSERT
K	1.035 [26.29]	2.035 [51.69]
L	1.140 [28.96]	2.140 [54.36]
WEIGHT (MAXIMUM)	.0074 LBS. [3.357gr.]	.0147 LBS. [6.689gr.]

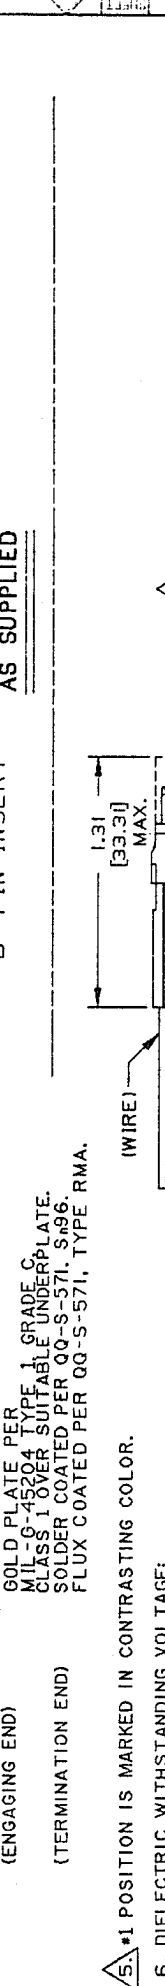

NOTES:

- PART NUMBER VARIABLE:
MTC50-YXX-XXX
015 = PIN INSERT
016 = SOCKET INSERT
1 = 1" INSERT
2 = 2" INSERT
A = 'A' INSERT
B = 'B' INSERT
- THE APPLICABLE TYCO ELECTRONICS SPECIFICATION FOR THIS PART IS C6111. THIS PART IS QUALIFIED TO C6111.
- MATERIAL:
SEE SCD CTA-024X
TRANSPARENT BLUE HEAT SHRINKABLE, RADIATION CROSS-LINKED PVF
B. WIRE AND INSERT SEALS: MODIFIED THERMOPLASTIC HOT MELT SEALANT.
C. INSERT BODY: HIGH GRADE POLYARYLENE THERMOPLASTIC OR EQUIVALENT.
D. PIN/SOCKET CONTACTS: COPPER ALLOY 172 PER QQ-C-533. SEE RAYCHEM SPECIFICATION CONTROL DRAWING D-141-0169.
- FINISH:
A. PIN/SOCKET INSERT: AS MOLDED
B. PIN/SOCKET CONTACT: (ENGAGING END)
(TERMINATION END)
- #1 POSITION IS MARKED IN CONTRASTING COLOR.
DIELECTRIC WITHSTANDING VOLTAGE:

TEST CONDITION	TEST VOLTAGE VAC RMS AT 60 HZ
SEA LEVEL	750
ALTITUDE 70,000 FT. (33.5 TORR) AMBIENT TEMP	250
ALTITUDE 80,000 FT. (20.6 TORR) -50°C TEMP	375

9. USABLE WIRE SIZE:
ROUND WIRE: 24 AWG OR 26 AWG.

9. SEE TYCO ENGINEERING STANDARD ES-61408 REV C FOR TERMINATION METHOD.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. METRIC DIMENSIONS ARE IN BRACKETS.
DECIMALS .XXX ±0.05 [0.13mm]
.XX ±0.3 [0.08mm]
ANGLES ±°

WEIGHT SEE TABULATION

THIRD ANGLE PROJECTION

CAD FILE: T-30858.TIF

APPROVED: J CAMERON
M BLAIR
M HIGBY
S CLEGG
87-APR-88
87-APR-88
87-APR-88

TYCO ELECTRONICS
RAYCHEM PRODUCTS
365 CONSTRUCTION DR
MENLO PARK, CA 94025

TITLE
INSERT, .050 PITCH, PASS TERM.
125°C OPERATING TEMPERATURE
(FOR 24-26 AWG WIRE)
MTC50 SERIES

SCALE DO NOT SCALE THIS DRAWING

SIZE C
CODE IDENT. NO. 06090
DRG. NO. MTC50-YXX-015/016
REV C

SHEET 1 OF 1

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [TE Connectivity](#) manufacturer:

Other Similar products are found below :

[95000-104TRLF](#) [10135584-644402LF](#) [DF62W-EP2022PCA](#) [95000-106TRLF](#) [DF62W-2022SCA](#) [DF62W-EP2022PC](#) [2203348](#) [DF62W-2022SC](#) [1084018](#) [1029039](#) [1084017](#) [802-10-012-10-002000](#) [1112640](#) [1112639](#) [891-007-9SS-BST1T](#) [000-34000](#) [0008550134](#) [0009482033](#) [0009507031](#) [57102-F02-18ULF](#) [57102-S06-03LF](#) [57202-S52-04LF](#) [PCN6-15S-2.5E](#) [0039019024](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [0009508121](#) [0022285053](#) [0050291907](#) [018731A](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#) [60101931](#) [60598-1 \(Cut Strip\)](#) [M1625-3R/100](#) [61062-3](#) [61082-181009](#) [CSU011177004](#) [636-1427](#) [638009-1](#) [641938-9](#) [641991-4](#) [644168-1](#) [644827-2](#) [647662-1](#) [65039-019ELF](#) [65692-001LF](#) [65781-018](#) [65781-047](#)