


REVISIONS				
P	LTR	DESCRIPTION	DATE	APVD
D2		ADD DASH NUMBER	27JUN2017	P.Z R.S

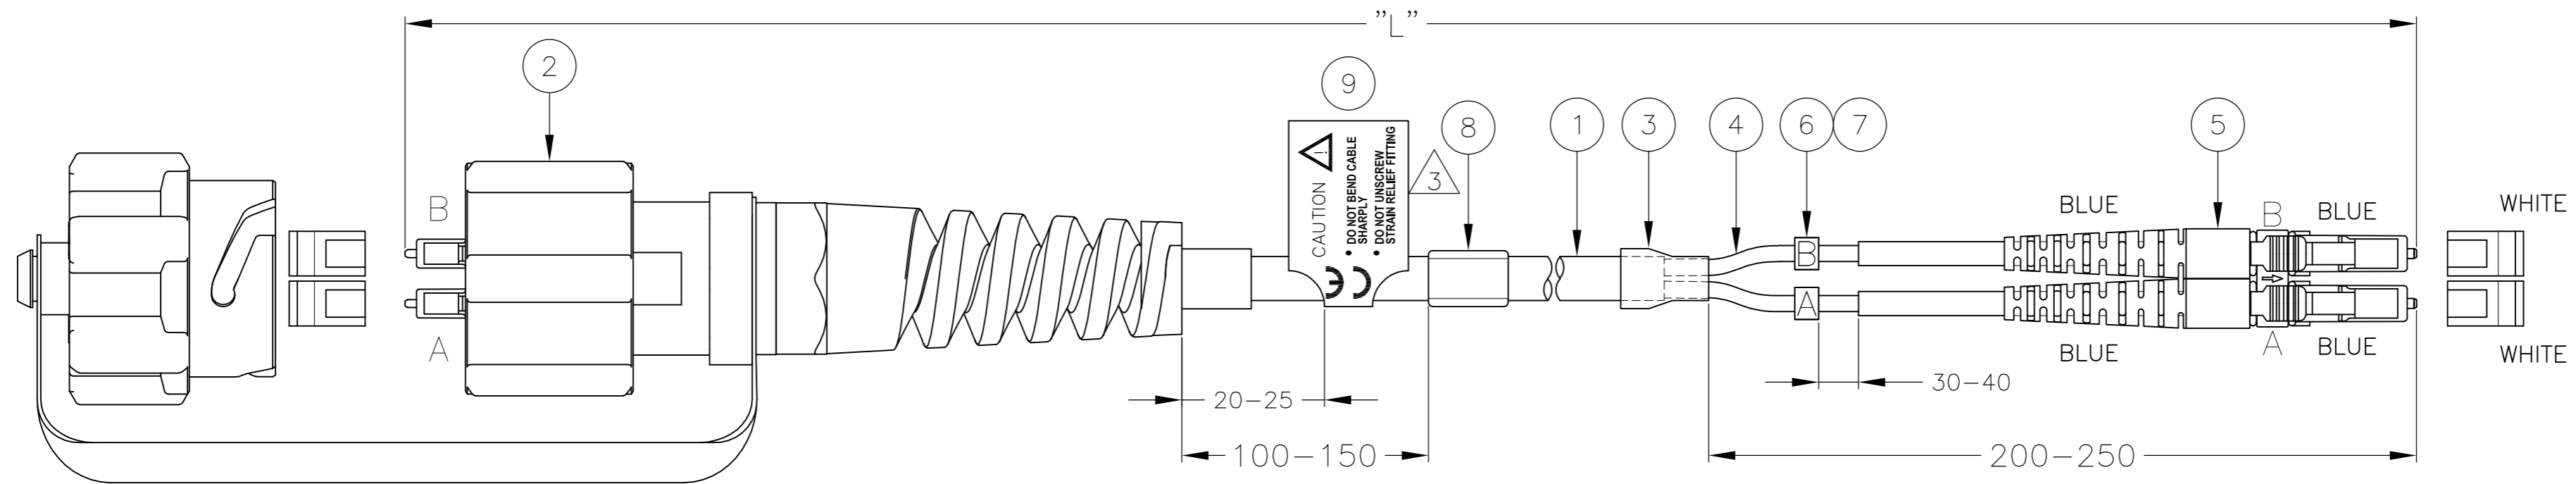


FIBER CONNECTIVITY	
ODVA	LC/DPX
A	A
B	B

PART NUMBER	"L" (METER)		MAXIMUM $\Delta$ ATTENUATION (dB)
	MIN	MAX	
2061348-2	1.85	2.15	0.30
2061348-5	4.85	5.15	0.30
1-2061348-0	9.85	10.15	0.30
1-2061348-5	14.80	15.20	0.31
2-2061348-0	19.80	20.20	0.31
3-2061348-0	29.50	30.50	0.31
3-2061348-5	34.50	35.50	0.32
4-2061348-5	44.50	45.50	0.33
5-2061348-0	49.50	50.50	0.33
6-2061348-0	59.00	61.00	0.34
7-2061348-0	69.00	71.00	0.34
7-2061348-5	74.00	76.00	0.34
8-2061348-0	79.00	81.00	0.35
8-2061348-5	84.00	86.00	0.35
9-2061348-0	89.00	91.00	0.35
9-2061348-9	99.00	101.00	0.35
8-2061348-1	118.8	121.2	0.36
8-2061348-3	178.0	182.0	0.40
8-2061348-4	247.0	253.0	0.44
8-2061348-2	297.0	303.0	0.45

NOTES:

- 1 MAXIMUM CONNECTOR ATTENUATION IS 0.3 dB PLUS CABLE ATTENUATION OF 0.5 dB/km AT 1310 nm (SEE TABLE)
- 2 FILLED OUT TEST RESULT SHEET SUPPLIED WITH EACH INDIVIDUALLY PACKED ASSEMBLY
- 3 INFORMATION ON LABEL SEE DETAIL:
  - BARCODE
  - UNIQUE SERIAL NUMBER
  - ASSEMBLY LENGTH
  - TE CONNECTIVITY PART NUMBER
  - TE CONNECTIVITY ORDER NUMBER
- 4 CABLE INFORMATION:
  - FIBER CORE DIAMETER: 9/125  $\mu$ m
  - OUTER JACKET DIAMETER: 5.5 mm
  - OUTER JACKET COLOUR: BLACK
  - OUTER JACKET MATERIAL: FLAME RETARDANT TPU
- 5 ENVIRONMENTAL PERFORMANCE  
-40°C TO +85°C
- 6 IP67 RATED
- 7 CABLE, EXTERNAL PLUG COMPONENTS AND CAP ARE UV STABLE

LABEL DETAIL: 3

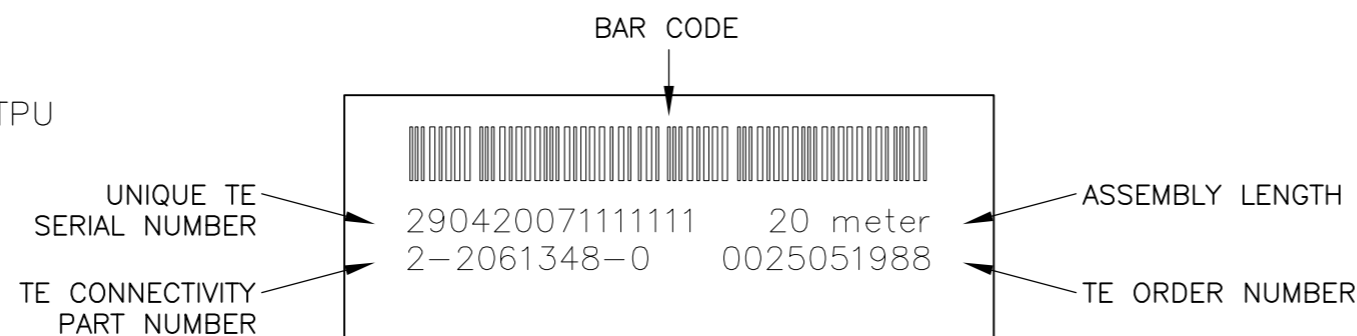

1	FOAC ODVA WARNING LABEL WITH CE-MARKING	9
1	FOAC INFORMATION LABEL	8
1	LABEL "B"	7
1	LABEL "A"	6
1	LC DUPLEX CONNECTOR ASSEMBLY, SINGLE MODE, BLUE	5
2	FOAC PROTECTIVE TUBING, BLACK	4
1	FOAC HEAT SHRINK TUBING, BLACK	3
1	PLUG SUBASSY, LC ODVA INDUSTRIAL CONNECTOR, WITH CAP	2
L	FOCAB 5.5 mm 2FOLD, SINGLE MODE 9/125, BLACK	1
Qty	Description	Item

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R. COOLEN 11DEC2009														
DIMENSIONS: mm		CHK M. JANSEN 26AUG2010														
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD J. VERHOEVEN 26AUG2010	NAME FIBER OPTIC LEAD 5.5 mm LC/DPX WITH ODVA ADAPTER - LC/DPX SINGLE MODE 9/125													
<table border="1"> <tr><td>0 PLC</td><td>± -</td></tr> <tr><td>1 PLC</td><td>± -</td></tr> <tr><td>2 PLC</td><td>± -</td></tr> <tr><td>3 PLC</td><td>± -</td></tr> <tr><td>4 PLC</td><td>± -</td></tr> <tr><td>ANGLES</td><td>± -</td></tr> </table>		0 PLC	± -	1 PLC	± -	2 PLC	± -	3 PLC	± -	4 PLC	± -	ANGLES	± -	PRODUCT SPEC -	SIZE A2	CAGE CODE 00779
0 PLC	± -															
1 PLC	± -															
2 PLC	± -															
3 PLC	± -															
4 PLC	± -															
ANGLES	± -															
MATERIAL -		FINISH -	WEIGHT 0.000000	DRAWING NO C=2061348												
CUSTOMER DRAWING			SCALE NTS	SHEET 1 of 1												
			REV D2	RESTRICTED TO -												

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Fibre Optic Cable Assemblies](#) category:*

*Click to view products by [TE Connectivity](#) manufacturer:*

Other Similar products are found below :

[7-21002-9](#) [760-1518](#) [FA04390-50-M-72-LC-N](#) [MLB 501 V RED](#) [MLB 501 V YELLOW](#) [1-3636-600-5208](#) [2061529-7](#) [1-6693182-0](#)  
[1754898-1](#) [21055-6](#) [FXBSCSCE2LM002](#) [3000005](#) [3-21053-2](#) [MLB 200/1 V BLACK](#) [MLB 2001 V RED](#) [MLB 2001 V YELLOW](#) [MLB 501](#)  
[V BLACK](#) [5492011-6](#) [106284-7000](#) [5492011-5](#) [5492011-8](#) [5492011-9](#) [8-21007-5](#) [2123524-2](#) [2123524-1](#) [106386-4447](#) [DFSM-SCSC-2M](#)  
[2123909-4](#) [2123909-8](#) [106273-0629](#) [2125046-1](#) [2821236-3](#) [2821310-2](#) [2821310-3](#) [2821313-4](#) [FX2ERLNLNSNM0.5](#) [CF-980062-074](#) [CF-](#)  
[901200-394](#) [CF-980062-073](#) [CF-980062-071](#) [CF-980062-075](#) [CF-980062-072](#) [17-300310-100](#) [2821236-2](#) [2821313-1](#) [G-FC-FC-S-002.0-DX-](#)  
[A-18-Y](#) [G-E2A-E2A-S-003.0-SX-A-18-Y](#) [956-322-502214](#) [FA04474](#) [1083665](#)