


CUSTOMER DRAWING

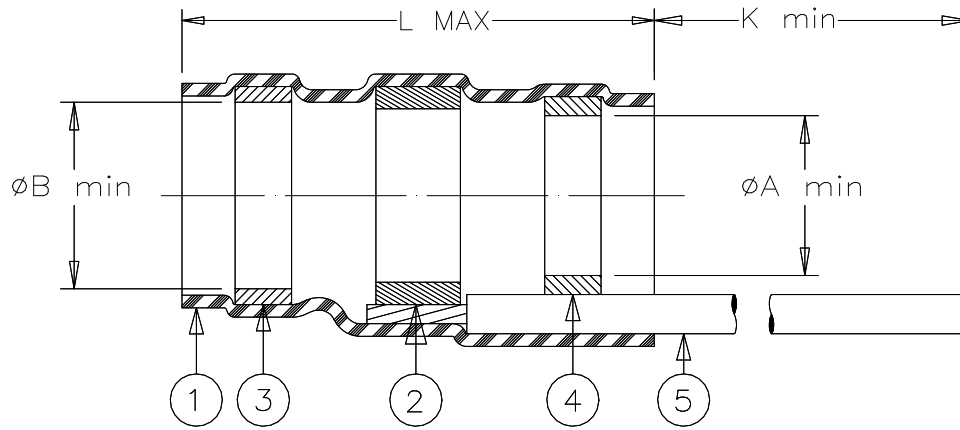

Part Names	Product Dimensions				Cable Dimensions			
	L max	A min	B min	K min	D max	E min	F min	J±0.5 (J±0.02)
B-900-01	16.5 (0.650)	2.6 (0.100)	3.1 (0.120)	150 (5.9)	2.6 (0.100)	1.6 (0.630)	1.5 (0.060)	7 (0.275)
B-900-02	16.5 (0.650)	4.4 (0.175)	4.9 (0.195)	150 (5.9)	4.4 (0.175)	2.2 (0.085)	2.1 (0.080)	7 (0.275)
B-900-03	21.5 (0.845)	6.9 (0.270)	7.4 (0.290)	150 (5.9)	6.9 (0.270)	3.4 (0.135)	3.2 (0.125)	7 (0.275)


MATERIAL

- INSULATION SLEEVE: Heat-shrinkable, radiation cross-linked modified polyvinylidene fluoride. Transparent blue.
- SOLDER PREFORM WITH FLUX:
SOLDER: TYPE Sn63 per ANSI J-STD-006.
FLUX: TYPE ROL0 per ANSI J-STD-004.
- & 4. MELTABLE RINGS: Thermally stabilized thermoplastic. Color: clear.
- GROUND LEAD: RAYCHEM 55A0111-24 in accordance with MIL-W-22759/32 AWG 24 stranded tin-plated copper.
Color: white.

APPLICATION

- These parts are designed to provide an environment protected shield termination on cables rated for 125°C minimum, meeting the dimensional criteria listed and having tin or silver-plated shields.
- Temperature range: -55°C to +150°C.
- Install using TE Connectivity approved convection or infrared tools in accordance with Raychem installation procedure RPIP-709-00.

For best results, prepare the cable as shown:

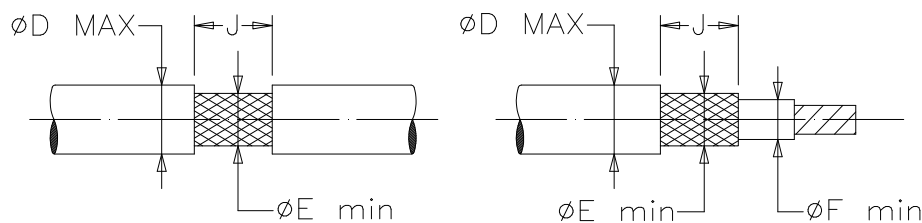

		Raychem Devices	TITLE : SOLDERSLEEVE DEVICE WITH PRE-INSTALLED LEAD			
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. INCHES DIMENSIONS ARE IN BETWEEN BRACKETS.			DOCUMENT NO.: B-900-0X			
TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A	ANGLES: N/A ROUGHNESS IN MICRON	TE Connectivity reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.	DOCUMENT REVISION: D		REVISION ISSUE DATE: 12-MAR-2020	
DRAWN BY: R. MAPALO	DATE: 17-SEP-1998	CAGE CODE: 06090	ECO NUMBER: ECO-20-003669	SCALE: NONE	SIZE: A	SHEET: 1 of 1

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Heat Shrink Cable Boots & End Caps](#) category:

Click to view products by [TE Connectivity](#) manufacturer:

Other Similar products are found below :

[577159N001](#) [645494-000](#) [CX4132-000](#) [687025-000](#) [705331-000](#) [718446-000](#) [725666N001](#) [729257-000](#) [F27131-000](#) [F85868-000](#) [770-003S106W2](#) [770-013210W1](#) [770-013311](#) [770-013312](#) [806542N001](#) [807507-000](#) [808362-000](#) [808618-000](#) [809125-000](#) [809130-000](#) [809218-000](#) [812014-000](#) [812047-000](#) [813166-000](#) [813767N002](#) [814741-000](#) [819117N001](#) [823026-000](#) [823070-000](#) [841189N001](#) [861471-000](#) [866647-000](#) [879515-000](#) [937577-000](#) [957073-000](#) [982033-2](#) [A77813-000](#) [R280576000](#) [D96192-000](#) [163549-000](#) [EN3BOOTLKIT](#) [MTPSRBCL-C](#) [1954015-1](#) [200W531-3-0](#) [202A163-4-0-CS5067](#) [202A343-3-00-0](#) [202B221-13-0](#) [202B231-13-0](#) [202B563-25-07-0](#) [202C241-13-0](#)