


CUSTOMER DRAWING

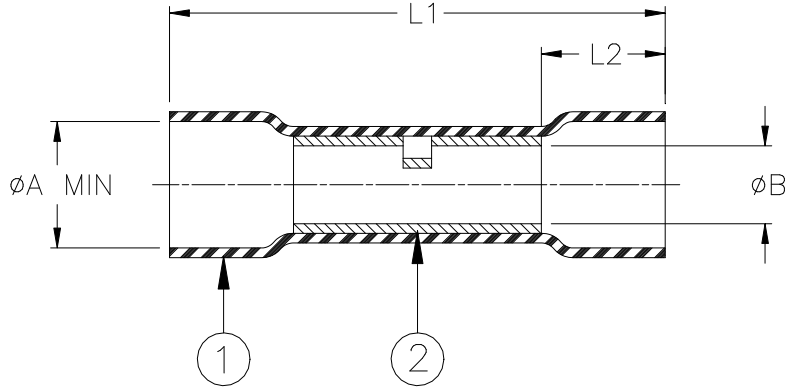


Product Name	Color	Marking	Size Range mm ² (AWG)	L1 ±1.50 [±0.06]	L2 min	øA*		øB min	Wire Strip Length Nom.
						(a) min	(b) max		
D-406-0034	Yellow	DURASEAL [®] 24-26	0.15 - 0.25 (26 - 24)	31.5 [1.24]	5.0 [0.20]	3.00 [0.118]	1.40 [0.055]	1.09 [0.043]	6 to 8 (1/4 to 5/16)
D-406-0001	Red	DURASEAL [®] 18-22	0.5 - 1.0 (22 - 18)	31.5 [1.24]	5.0 [0.20]	3.70 [0.146]	1.40 [0.055]	1.47 [0.058]	6 to 10 (1/4 to 3/8)
D-406-0002	Blue	DURASEAL [®] 14-16	1.5 - 2.5 (16 - 14)	31.5 [1.24]	5.0 [0.20]	4.60 [0.181]	2.00 [0.080]	2.33 [0.092]	6 to 10 (1/4 to 3/8)
D-406-0003	Yellow	DURASEAL [®] 10-12	3.0 - 6.0 (12 - 10)	37.5 [1.48]	10.0 [0.39]	6.50 [0.255]	2.80 [0.110]	3.50 [0.138]	10 to 13 (3/8 to 1/2)

MATERIALS

- INSULATION SLEEVE: Heat-shrinkable, radiation cross-linked polyamide (Nylon) with a polyamide-based hot-melt adhesive liner. See above table for applicable sleeve color.
- CRIMP SPLICE: Tin-plated copper alloy.
BASE METAL: Copper alloy C11000 per ASTM B152.
PLATING: Tin-plated per ASTM B545, Class A.

APPLICATION

- These parts may be used to obtain an environment-resistant one-to-one in-line (butt) splice in wires meeting the size range and diameter restraints specified herein and having a temperature rating of not less than 85°C.
- * øA: (a) Minimum diameter as received: Wire insulation diameter must be less than this value.
(b) Maximum diameter after recovery: Wire insulation diameter must be larger than this value to obtain an environment resistant splice.
- Wires are to be stripped per table, inserted into opposite ends of the crimp barrel, crimped with a TE Connectivity AD-1522 (22-10 AWG) or equivalent. For D-406-0034, Pro-Crimper III with die set 1976357-1 (24-26 AWG) or equivalent may be used. The sleeve must be heated along its entire length until the crimp marks are gone and the ends of the sleeve recover onto the wires.
- Spliced assemblies will meet the requirements of TE Connectivity / Raychem specification RB-107.
- Except for D-406-0034, all of the parts covered by this drawing are UL Listed (US and CANADA), File #E87681.

 TE Connectivity		Raychem Devices		TITLE: DURASEAL CRIMP SPLICE ENVIRONMENT RESISTANT		
Unless otherwise specified dimensions are in millimeters. Inches dimensions are shown in [brackets].				DOCUMENT NO.: D-406-00XX		
TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A	ANGLES: N/A ROUGHNESS IN MICRON	Tyco Electronics reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.		REV.: C3	REV DATE: 13-Dec-2018	
DRAWN BY: P. TALLY	CAGE CODE: 06090	DRAWN DATE: 1/28/2008	ECO No.: ECO-18-019635	SCALE: NTS	SIZE: A	SHEET: 1 of 1

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Solder Sleeves & Shield Tubing](#) category:

Click to view products by [TE Connectivity](#) manufacturer:

Other Similar products are found below :

[D-260-C-A](#) [899170-000](#) [620040N001](#) [620069N003](#) [620263N004](#) [CTA-0050-01](#) [629624-000](#) [6501390002](#) [CX0781-000](#) [CX0782-000](#)
[696396-000](#) [697080-000](#) [715325N001](#) [FLX40-030-02-CS8652](#) [908357N001](#) [D-436-38CS2908](#) [CB0213-000](#) [CB0219-000](#) [274384-000](#)
[285343-000](#) [970053-000](#) [ST18-2-00](#) [FLX40-020-04-CS8651](#) [317035-000](#) [325534-000](#) [D-100-00-WOTI](#) [D-150-1011](#) [395947-000](#)
[427243N001](#) [514535-000](#) [C03534-000](#) [CB0220-000](#) [D44133N001](#) [068615-000](#) [626168-000](#) [451893-000](#) [931289-000](#) [162583-000](#)
[585769N001](#) [610001N004](#) [620005N003](#) [6200060004](#) [622041N003](#) [626167-000](#) [EG3678-000](#) [650075N002](#) [6500820003](#) [6500850004](#)
[650126N010](#) [650127N005](#)