



## DBL POWER DISTRIBUTION BLOCKS

### Screw clamp technology

1000 V AC / 1500 V DC (IEC) - 1000 V (UL), from 80 to 550 A

#### ENTRELEC Terminal Blocks

The compact and modular design of our power distribution blocks allows easy installation combined with a great flexibility of use.



#### EASY TO INSTALL

##### 3 configurations in 1 product:

- **Single pole splitter:** split of power main input into several outputs.
- **Multiple poles splitter:** interlocking function and ready to use marking kit (L1, L2, L3, N, PE, +, -) delivered with each block.
- **Grouping** of several inputs into 1 output (solar application).

##### Flexible cover facilitates identification & wiring:

- Reversible, two directions opening, snap-on.
- All wiring data and specifications visible on top.



#### SPACE SAVING

##### Panel space saving:

Save up to 50 % rail space compared to conventional distribution bars thanks to our modular compact design.

##### 1 500 V DC:

Voltage rating adapted to most recent solar inverters requirements.



#### INCREASED PRODUCTIVITY

##### Reduced wiring, inventories, hardware and assembly costs:

- Reduce assembly time by 80 % compared to conventional systems.
- Our modular and touch proof concept significantly reduces the needs for bus bars, isolators, fasteners, protection screens...
- Accept **aluminum & copper** conductors.
- 1 product in stock for **3 possible** configurations.



# DBL Power distribution blocks

## Screw clamp technology

### Single pole

#### DBL80

7 connections



#### DBL125

8 connections



#### DBL160

8 connections



#### DBL175

12 connections



#### DBL250 and DBL400

12 connections



### Solar

#### DBL400-PV

14 connections



### Three poles

#### DBL125-3 and DBL175-C-3

8x3 connections



### Flat conductor

#### DBL250-F and DBL500-F


7 and 12 connections



### 2 inputs / 2 outputs

#### DBL500-22

4 connections

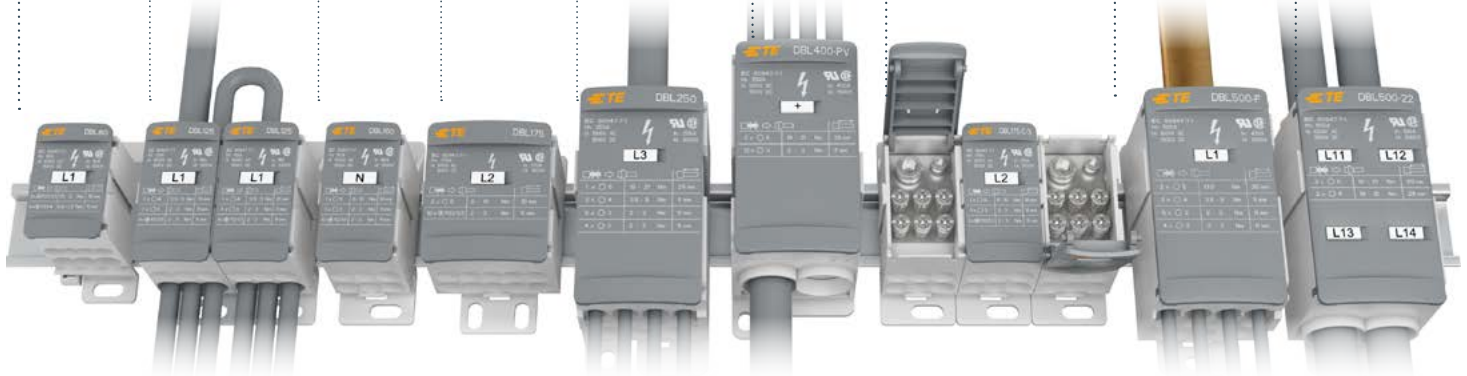

Type	Part number	Pkg	Max current		Connection capacity			Max cross section			Type	Part number	Pkg						
			IEC	UL / CSA	Cable diameter Ø			Flexible with insulated ferrule						Rigid Solid			Rigid Stranded		
					nb	mm	in	mm <sup>2</sup>	AWG	mm <sup>2</sup>				AWG	mm <sup>2</sup>	AWG	mm <sup>2</sup>	AWG	
	Cu: 80 A Al: 63 A	Cu: 80 A	3	6.6	0.26	2.5 ... 16	14 ... 6	2.5 ... 16	14 ... 4	2.5 ... 16	14 ... 4	2.5 ... 16	14 ... 4	DBL80	1SNL308010R0000	1			
	Cu: 125 A Al: 100 A	Cu: 115 A	1	9.8	0.386	10 ... 35	8 ... 2	10 ... 35	8 ... 2	10 ... 35	8 ... 2	10 ... 35	8 ... 2	DBL125	1SNL312510R0000	1			
	Cu: 125 A Al: 100 A	Cu: 115 A	3x1	9.8	0.386	10 ... 35	8 ... 2	10 ... 35	8 ... 2	10 ... 35	8 ... 2	10 ... 35	8 ... 2	DBL125-3	1SNL312530R0000	1			
	Cu: 160 A Al: 135 A	Cu: 160 A	1	11.8	0.465	16 ... 50	6 ... 1/0	16 ... 70	6 ... 2/0	16 ... 70	6 ... 2/0	16 ... 70	6 ... 2/0	DBL160	1SNL316010R0000	1			
	Cu: 175 A Al: 135 A	Cu: 175 A	2	11.8	0.465	10 ... 50	8 ... 1/0	10 ... 70	6 ... 2/0	10 ... 70	6 ... 2/0	10 ... 70	6 ... 2/0	DBL175	1SNL317510R0000	1			
	Cu: 175 A Al: 135 A	Cu: 175 A	3x1	11.8	0.465	16 ... 50	8 ... 1/0	16 ... 70	6 ... 2/0	16 ... 70	6 ... 2/0	16 ... 70	6 ... 2/0	DBL175-C-3	1SNL317531R0000	1			
	Cu: 250 A Al: 200 A	Cu: 255 A	1	15.3	0.602	35 ... 95	2 ... 3/0	35 ... 120	2 ... 250 kcmil	35 ... 120	2 ... 250 kcmil	35 ... 120	2 ... 250 kcmil	DBL250	1SNL325010R0000	1			
	Flexible bars: 250 A Solid bars: 208 A	Flexible bars: 250 A Solid bars: 160 A	1	15.5 x 7.5	0.59 x 0.28	Flexible bars: 3 x 9 x 0.8 mm ... 6 x 15.5 x 0.8 mm Solid bars: 12 x 4 mm								DBL250-F	1SNL325060R0000	1			
	Cu: 400 A Al: 300 A	Cu: 335 A	1	18.8	0.74	95 ... 150	3/0 ... 300 kcmil	95 ... 185	3/0 ... 400 kcmil	95 ... 185	3/0 ... 400 kcmil	95 ... 185	3/0 ... 400 kcmil	DBL400	1SNL340010R0000	1			
	Cu: 550 A	Cu: 400 A	2	15.5	0.59	2.5...95	4...3/0	25...120	4...250 kcmil	25...120	4...250 kcmil	25...120	4...250 kcmil	DBL400-PV	1SNL340011R0000	1			
	Cu: 500 A	Cu: 510 A	2	15.5	0.61	25 ... 95	4 ... 3/0	25 ... 120	4 ... 250 kcmil	25 ... 120	4 ... 250 kcmil	25 ... 120	4 ... 250 kcmil	DBL500-22	1SNL850001R0000	1			
	Flexible bars: 500 A Solid bars: 500 A	Flexible bars: 420 A Solid bars: 420 A	1	26 x 10.8	1.02 x 0.4	Flexible bars: 3 x 9 x 0.8 mm ... 10 x 24 x 1 mm Solid bars: 12 x 4 mm ... (2x) 25 x 5 mm								DBL500-F	1SNL350060R0000	1			

Rated voltage 1000 V AC, 1500 V DC (IEC) / 1000 V AC/DC (UL/CSA).

Flexible without ferrule (IEC V-K & UL: class 5/6)	Flexible with insulated ferrule (IEC V-K & UL: class 5/6)	Rigid Solid (IEC V-U class 1, UL solid)	Rigid Stranded (IEC V-R class 2, UL class B/C)
--	---	---	--

te.com

© 2022 TE Connectivity Ltd. family of companies. All Rights Reserved.

ENTRELEC, TE Connectivity, TE connectivity (logo) and Every Connection Counts are trademarks. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

While TE has made every reasonable effort to ensure the accuracy of the information in this document, TE reserves the right to make any changes to the information contained herein without prior notice. Information contained herein are for reference purposes only and TE expressly disclaims any implied warranties with respect to the information contained herein, including, but not limited to, implied warranties of merchantability or fitness for a particular purpose. TE assumes only those obligations set forth in the terms and conditions for this product and shall in no event be liable for any incidental, indirect, or consequential damages arising out of the sale, resale, use, or misapplication of the product. Consult TE for the latest dimensions and design specifications.

TE Connectivity  
3, rue Jean Perrin  
69687 Chassieu cedex  
France  
Tel: +33 481923100

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [DIN Rail Terminal Blocks](#) category:*

*Click to view products by [TE Connectivity](#) manufacturer:*

Other Similar products are found below :

[00110420202](#) [00175550302](#) [CTS25U/BL](#) [9123140000](#) [RBO 5-T-B-HEX](#) [90.070](#) [90.202](#) [912314](#) [260-301\\_NR](#) [280-560](#) [280-564](#) [281-611/281-542](#) [281-673/281-411](#) [281-994](#) [283-317](#) [283-607](#) [264-724](#) [264-726](#) [280-530](#) [280-555](#) [280-619](#) [281-610](#) [281-622/281-417](#) [284-317](#)  
[35956](#) [USK 10](#) [102510](#) [1126840000](#) [5520682](#) [EMH 25-ZE30](#) [1SNK706410R0000](#) [1SNK705210R0000](#) [1SNK705020R0000](#)  
[1SNK506066R0000](#) [1SNK506061R0000](#) [1SNK506012R0000](#) [1SNK505060R0000](#) [UM 45-SEFE M.NUT BK](#) [1SNK506013R0000](#)  
[1SNK506030R0000](#) [1SNK506062R0000](#) [1SNK506065R0000](#) [1SNK508062R0000](#) [1SNK508065R0000](#) [1SNK508066R0000](#)  
[1SNK705010R0000](#) [1SNK705012R0000](#) [1SNK705150R0000](#) [1SNK705152R0000](#) [1SNK705310R0000](#)