


KCP Series Plug-in Relay

- Enclosed dust cover
- DC current sensitive relay
- 1, 2, and 3 Form C (CO) contact arrangement
- 8 and 11 pin octal style plugs
- Operates on 125mW per movable arm

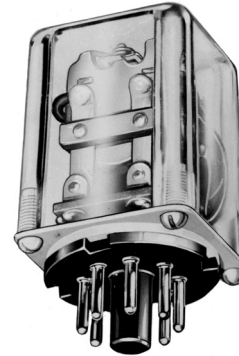

Contact Data	
Contact arrangement	1 form C (CO), 2 form C (CO), 3 form C (CO)
Rated voltage	120VAC
Rated current	2A
Contact material	Ag
Min. recommended contact load	100mA, 12VDC
Initial contact resistance	100mΩ
Frequency of operation	360 ops./hour
Operate/release time max.	20/10ms

Contact ratings		
Type	Load	Cycles
1, 2 and 3 pole, Ag	2A, 120VAC	100x10 ³ ops.
Mechanical endurance		15x10 ⁶ ops.

Coil Data	
Coil current range	3.6mA to 12.3mA (DC only)

Coil versions, DC Coil			
Coil code	Operate current mADC	Coil resistance Ω±10%	Rated coil power mW

Coil versions, 1 pole			
2,500	7.2	2,500	125
5,000	5	5,000	125
10,000	3.6	10,000	125

Coil versions, 2 pole			
2,500	10	2,500	250
5,000	7.2	5,000	250
10,000	5	10,000	250

Coil versions, 3 pole			
2,500	12.3	2,500	375
5,000	8.7	5,000	375
10,000	6.1	10,000	375

All figures are given for coil without preenergization, at ambient temperature +23°C.

Insulation Data	
Initial dielectric strength	
between open contacts	500V _{rms}
between contact and coil	500V _{rms}
between adjacent contacts	500V _{rms}
Initial insulation resistance	
between insulated elements	1,000MΩ


Other Data	
Material compliance: EU RoHS/ELV, China RoHS, REACH, Halogen content refer to the Product Compliance Support Center at www.te.com/customer-support/rohssupportcenter	
Ambient temperature	
DC coil	-45°C to 70°C
AC coil	-45°C to 70°C
Category of environmental protection	
IEC 61810	RT1 - dust protected
Terminal type	8- or 11-pin octal-style plug
Weight	82.2g
Packaging/unit	tray/25 pcs., box/200pcs.

Accessories	
For details see datasheet	Sockets and Accessories, KRP Relays


Product Code	Description
27E891	8-pin DIN socket (use 20C318 clip)
27E892	11-pin DIN socket (use 20C318 clip)
27E122	8-pin track mount socket (use 20C318 clip)
27E123	11-pin track mount socket (use 20C318 clip)

KCP Series Plug-in Relay (Continued)

Dimensions

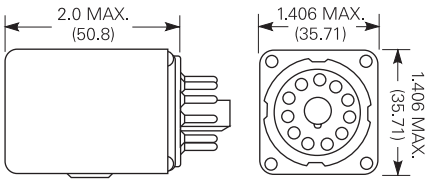

Terminal assignment

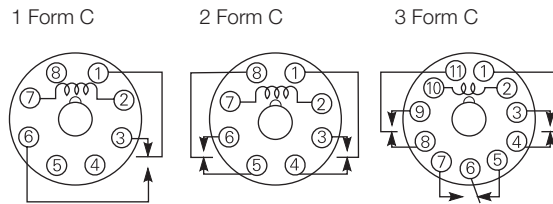

Note: KCP-14 shown. KCP-5 and KCP-11 have 8-pin bases.

Product code structure	Typical product code	KCP	-11	-10000
Type	KCP Enclosed, DC current sensitive relay with octal-type plug for socket mounting			
Contact arrangement	<ul style="list-style-type: none"> 5 1 form C (CO) 11 2 form C (CO) 14 3 form C (CO) 			
Coil Resistance	<ul style="list-style-type: none"> 2500 2,500Ω 5000 5,000Ω 10000 10,000Ω 			

Product Code	Arrangement	Contact Material	Coil Resistance	Terminals	Part Number
KCP-11-10000	2 form C, 2 CO	Ag	10,000	8-pin Octal-style plug	3-1393100-8

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [General Purpose Relays](#) category:

Click to view products by [TE Connectivity](#) manufacturer:

Other Similar products are found below :

[PCN-105D3MH,000](#) [59641F200](#) [5JO-1000CD-SIL](#) [LY1SAC110120](#) [5X827E](#) [5X837F](#) [5X840F](#) [5X842F](#) [5X848E](#) [LY2N-AC120](#) [LY2S-AC220/240](#) [LY2-US-AC120](#) [LY3-US-AC120](#) [LY4F-UA-DC12](#) [LY4F-UA-DC24](#) [LY4F-US-AC120](#) [LY4F-US-AC240](#) [LY4F-US-DC24](#) [LY4F-VD-AC110](#) [LYQ20DC12](#) [M115C60](#) [M115N010](#) [M115N0150](#) [6031007G](#) [603-12D](#) [61211T0B4](#) [61212T400](#) [61222Q400](#) [61243B600](#) [61243C500](#) [61243Q400](#) [61311BOA2](#) [61311BOA6](#) [61311BOA8](#) [61311C0A2](#) [61311COA1](#) [61311COA6](#) [61311F0A2](#) [61311QOA1](#) [61311QOA4](#) [61311T0D6](#) [61311TOA6](#) [61311TOA7](#) [61311TOB3](#) [61311TOB4](#) [61311U0A6](#) [61312Q600](#) [61312T400](#) [61312T600](#) [61313U200](#)