

CABLE BREAKOUT BOOTS, THREE ENTRY

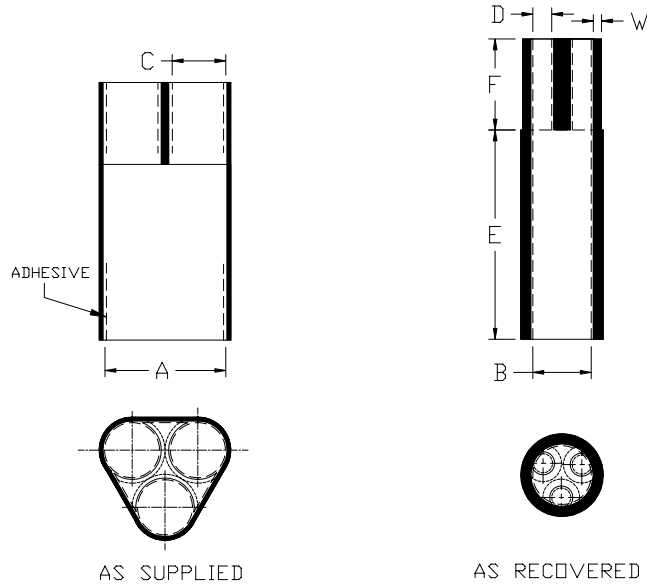


Table of Dimensions, inch (mm):

| PART NUMBER (See Note*) | BODY ID | | LEG ID | | Length Recovered Min | | Rec'd. Wall Thickness Ref (W) |
|----------------------------|---------------|-----------------|---------------|-----------------|-------------------------|----------|----------------------------------|
| | Exp. (A), Min | Rec'd. (B), Max | Exp. (C), Min | Rec'd. (D), Max | (E), Body | (F), Leg | |
| T3-9FR | 0.90 (23) | 0.36 (9) | 0.33 (8) | 0.12 (3) | 2.0 (51) | 0.7 (18) | 0.04 (1.0) |
| T14-23FR | 1.20 (30) | 0.69 (18) | 0.50 (13) | 0.18 (5) | 2.3 (58) | 1.0 (25) | 0.09 (2.3) |
| T23-50FR | 1.20 (30) | 0.69 (18) | 0.50 (13) | 0.18 (5) | 2.3 (58) | 1.0 (25) | 0.09 (2.3) |
| T42-100FR | 1.70 (43) | 0.90 (23) | 0.82 (21) | 0.30 (8) | 2.3 (58) | 1.2 (30) | 0.12 (3.0) |
| T60-150FR | 1.70 (43) | 0.90 (23) | 0.82 (21) | 0.30 (8) | 2.3 (58) | 1.2 (30) | 0.12 (3.0) |
| T150-300FR | 2.40 (61) | 1.40 (36) | 1.25 (32) | 0.50 (13) | 3.5 (89) | 1.6 (41) | 0.12 (3.0) |
| T200-400FR | 2.40 (61) | 1.40 (36) | 1.25 (32) | 0.50 (13) | 3.5 (89) | 1.6 (41) | 0.12 (3.0) |
| T-400FR | 3.20 (81) | 2.00 (51) | 1.40 (36) | 0.75 (19) | 3.5 (89) | 1.6 (41) | 0.14 (3.6) |
| T500-600FR | 4.90 (124) | 2.32 (59) | 2.00 (51) | 1.00 (25) | 7.5 (191) | 2.2 (56) | 0.12 (3.0) |

Note*: Add "NA" to the end of Part Number if no adhesive is required

Material: Heat shrinkable boot material in accordance with -3 polyolefin

Factory applied sealant: Factory applied hot melt adhesive is standard.

CUSTOMER DRAWING

| | | | | | | | |
|--|--|--|------------|---|----------------|------|--------|
| | | Raychem Molded Parts 305 Constitution Drive, Menlo Park, CA 94025 | | TITLE: | | | |
| | | | | CABLE BREAKOUT BOOT, THREE ENTRY | | | |
| Unless otherwise specified dimensions are in inches. [Metric dimensions are shown in brackets] | | | | DOCUMENT NO.: | | | |
| | | | | TXXX-XXXFR | | | |
| Tyco Electronics reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application. | | | | REV: | | | |
| | | | | G | | | |
| REVISD BY: | | CAGE CODE: | Org. Date: | ECO #: | FILE : | SIZE | SHEET: |
| UNGUYEN | | 06090 | 5/7/07 | 09-019755 | TXXX-XXXFR.doc | A | 1 of 1 |

© 2003-2009 Tyco Electronics Corporation. All rights reserved

If this document is printed it becomes uncontrolled. Check for the latest revision.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Heat Shrink Cable Boots & End Caps](#) category:

Click to view products by [TE Connectivity](#) manufacturer:

Other Similar products are found below :

[577159N001](#) [645494-000](#) [CX4132-000](#) [687025-000](#) [705331-000](#) [718446-000](#) [725666N001](#) [729257-000](#) [F27131-000](#) [F85868-000](#) [770-003S106W2](#) [770-013210W1](#) [770-013311](#) [770-013312](#) [806542N001](#) [807507-000](#) [808362-000](#) [808618-000](#) [809125-000](#) [809130-000](#) [809218-000](#) [812014-000](#) [812047-000](#) [813166-000](#) [813767N002](#) [814741-000](#) [819117N001](#) [823026-000](#) [823070-000](#) [841189N001](#) [861471-000](#) [866647-000](#) [879515-000](#) [937577-000](#) [957073-000](#) [982033-2](#) [A77813-000](#) [R280576000](#) [D96192-000](#) [163549-000](#) [EN3BOOTLKIT](#) [MTPSRBCL-C](#) [1954015-1](#) [200W531-3-0](#) [202A163-4-0-CS5067](#) [202A343-3-00-0](#) [202B221-13-0](#) [202B231-13-0](#) [202B563-25-07-0](#) [202C241-13-0](#)