


order number: J00026A0165

RJ45 plug MP8(8) FS Cat.6_A

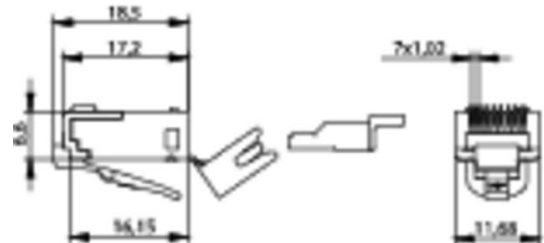

Technical Attributes	
Short name	RJ45 plug MP8(8) FS Cat.6 _A
Remarks	8-way fully shielded with wire presorting; AWG 24-27 (stranded and solid); please order cable boot separately

Mechanical Characteristics	
Insertion force	≤ 30N
Durability (mating cycles)	≥ 750
Material: contacts	phosphor bronze
Material: contact finish	Ni2.54Au0.8
Material: connector housing	PC UL94 V0
Material: insertion	PC UL94 V0
Material: shielding housing	0.5 mm brass, 2 μm Ni
Material: cable boot	PVC UL94 V0 (Ø 6.3 mm / Ø 7.0 mm); PA6 UL94 V0 (Ø 6.0 mm)
Mating Requirements Cu-Conductor diameter: solid	0.36 - 0.51 mm (AWG27/1 - 24/1)
Mating Requirements Cu-Conductor	0.46 - 0.61 mm (AWG27/7 - 24/7)

diameter: stranded	
Core Diameter	0.85 - 1.05 mm
Overall cable diameter	5.5 - 7.3 mm
Crimp tool	N00001A0002

Climatic Characteristics	
Temperature range	-40°C ... 70°C
UL	E244889

Electrical Characteristics	
Current carrying capacity at 50°C	1 A
PoE+ acc to IEEE 802.3at	Adequate for Power over Ethernet+

Standards	
Connectors	IEC 60603-7-51

Transmission Characteristics	
Gigabit Ethernet acc. to IEEE 802.3	
10 Gigabit Ethernet acc. to IEEE 802.3an	Adequate for 10 Gigabit Ethernet

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Modular Connectors / Ethernet Connectors](#) category:

Click to view products by [TELEGARTNER](#) manufacturer:

Other Similar products are found below :

[RJE231881317T](#) [MP1010RX-1000](#) [MP44RX-1000](#) [GAX-3-66](#) [GAX-8-62](#) [93606-0253](#) [GD-A-44](#) [GDCX-PA-66-50](#) [GDCX-PN-64](#) [GDCX-PN-66](#) [GDCX-PN-66-50](#) [GDLX-A-66](#) [GDLX-A-88](#) [GDLX-N-66](#) [GDLX-S-88K](#) [GDTX-S-88-50](#) [GDX-PA-1010](#) [GLX-N-1010M-BLK](#) [GLX-N-44M](#) [GLX-S-88M-BLK](#) [GMX-N-1010](#) [GMX-S-1010](#) [GMX-S-66](#) [GMX-SMT2-N-1010](#) [GMX-SMT2-N-64-50](#) [GMX-SMT2-S6-88](#) [GMX-SMT4-N-88](#) [GPX-2-64](#) [GRT1-BT1-5](#) [GSGX-N-2-88](#) [GSX-NS2-88-3.05](#) [GSX-NS2-88-3.05-50](#) [GSX-NS-88-3.05-30](#) [GSX-NS-88-3.05-50](#) [GSX-NS-88-3.68](#) [1-1775629-2](#) [GWLX-S-88-GR](#) [GWLX-S9-88-YG](#) [1300500326](#) [1300500227](#) [1300530003](#) [1300570002](#) [1324640-4](#) [RJ11FTVC2G](#) [RJ11FTVC2N](#) [RJFTVX2SA1G](#) [132764-001](#) [1400000](#) [1413176](#) [1413235](#)