

- Reinforced I/O-isolation 3000 VAC
- Shock and vibration resistance according to EN 61373
- Wide 4:1 input voltage range: 9-36, 18-75, 40-160 VDC
- Operating temperature range -40 to +85°C
- Internal EN 55032 class A filter
- High efficiency up to 88%
- Protection against overload, overvoltage and short circuit
- 3-year product warranty



The THR 20WI is 20 Watt DC/DC converters series with reinforced isolation (3000 VAC). These regulated DC/DC converters come in either a 2"x1" package and also feature increased resistance against shock and vibration according to EN 61373. The THR 20WI offers an internal input filter to comply with EN 55032 class A. High efficiencies up to 88% allow safe operation from -40°C to +80°C (with derating). All models have a wide 4:1 input voltage range and precisely regulated, isolated output voltages. With the latest IT safety certifications (IEC/EN/UL 62368-1) the THR 20WI series is the perfect choice for many demanding applications in the industrial, transportation and instrumentation sectors.

### Models

Order Code	Input Voltage Range	Output 1		Output 2		Efficiency typ.
		Vnom	I <sub>max</sub>	Vnom	I <sub>max</sub>	
THR 20-2411WI	9 - 36 VDC (24 VDC nom.)	5 VDC	4'000 mA			87 %
THR 20-2412WI		12 VDC	1'670 mA			87 %
THR 20-2413WI		15 VDC	1'330 mA			87 %
THR 20-2415WI		24 VDC	833 mA			87 %
THR 20-2422WI		+12 VDC	833 mA	-12 VDC	833 mA	86 %
THR 20-2423WI		+15 VDC	667 mA	-15 VDC	667 mA	86 %
THR 20-4811WI	18 - 75 VDC (48 VDC nom.)	5 VDC	4'000 mA			87 %
THR 20-4812WI		12 VDC	1'670 mA			88 %
THR 20-4813WI		15 VDC	1'330 mA			88 %
THR 20-4815WI		24 VDC	833 mA			88 %
THR 20-4822WI		+12 VDC	833 mA	-12 VDC	833 mA	87 %
THR 20-4823WI		+15 VDC	667 mA	-15 VDC	667 mA	87 %
THR 20-7211WI	40 - 160 VDC (110 VDC nom.)	5 VDC	4'000 mA			84 %
THR 20-7212WI		12 VDC	1'670 mA			86 %
THR 20-7213WI		15 VDC	1'330 mA			86 %
THR 20-7215WI		24 VDC	833 mA			86 %
THR 20-7222WI		+12 VDC	833 mA	-12 VDC	833 mA	86 %
THR 20-7223WI		+15 VDC	667 mA	-15 VDC	667 mA	86 %

### Options

<b>on demand</b> (backorder with MOQ non stocking item)	- Optional models with alternative pinning - Optional models with heatsink
--	---

## Input Specifications

Input Current	- At no load	24 Vin models: <b>25 mA typ.</b> 48 Vin models: <b>15 mA typ.</b> 110 Vin models: <b>10 mA typ.</b>
	- At full load	24 Vin models: <b>961 mA typ.</b> 48 Vin models: <b>476 mA typ.</b> 110 Vin models: <b>212 mA typ.</b>
Surge Voltage		24 Vin models: <b>50 VDC max.</b> (100 ms max.) 48 Vin models: <b>100 VDC max.</b> (100 ms max.) 110 Vin models: <b>170 VDC max.</b> (100 ms max.)
Under Voltage Lockout		24 Vin models: <b>7.5 VDC typ.</b> 48 Vin models: <b>16 VDC typ.</b> 110 Vin models: <b>37 VDC typ.</b>
Recommended Input Fuse		(The need of an external fuse has to be assessed in the final application.)
Input Filter		Internal Pi-Type

## Output Specifications

Output Voltage Adjustment		<b>±10%</b> (single output models only) (By external trim resistor) See application note: <a href="http://www.tracopower.com/overview/thr20wi">www.tracopower.com/overview/thr20wi</a> Output power must not exceed rated power!
Voltage Set Accuracy		<b>±1% max.</b>
Regulation	- Input Variation (Vmin - Vmax)	single output models: <b>0.2% max.</b> dual output models: <b>0.2% max.</b>
	- Load Variation (0 - 100%)	single output models: <b>0.5% max.</b> dual output models: <b>1% max.</b> (Output 1) <b>1% max.</b> (Output 2)
	- Voltage Balance (symmetrical load)	dual output models: <b>2% max.</b>
Ripple and Noise (20 MHz Bandwidth)	- single output	5 Vout models: <b>50 mVp-p typ.</b> (w/ 10 µF, 25 V MLCC) 12 Vout models: <b>100 mVp-p typ.</b> (w/ 10 µF, 25 V MLCC) 15 Vout models: <b>100 mVp-p typ.</b> (w/ 10 µF, 25 V MLCC) 24 Vout models: <b>150 mVp-p typ.</b> (w/ 4.7 µF, 50 V MLCC)
	- dual output	12 / -12 Vout models: <b>100 / 100 mVp-p typ.</b> (w/ 10 µF, 25 V MLCC) 15 / -15 Vout models: <b>100 / 100 mVp-p typ.</b> (w/ 10 µF, 25 V MLCC)
Capacitive Load	- single output	5 Vout models: <b>6'800 µF max.</b> 12 Vout models: <b>1'200 µF max.</b> 15 Vout models: <b>750 µF max.</b> 24 Vout models: <b>300 µF max.</b>
	- dual output	12 / -12 Vout models: <b>600 / 600 µF max.</b> 15 / -15 Vout models: <b>380 / 380 µF max.</b>
Minimum Load		Not required
Temperature Coefficient		<b>±0.02 %/K max.</b>
Start-up Time		<b>30 ms typ. / 50 ms max.</b>
Short Circuit Protection		Continuous, Automatic recovery
Output Current Limitation		<b>150% typ. of Iout max.</b>
Overvoltage Protection		<b>125% typ. of Vout nom.</b>
Transient Response	- Response Deviation	<b>3% typ. / 5% max.</b> (75% to 100% Load Step)
	- Response Time	<b>300 µs max.</b> (75% to 100% Load Step)

## Safety Specifications

Safety Standards	- IT / Multimedia Equipment	EN 62368-1 IEC 62368-1 UL 62368-1
	- Certification Documents	<a href="http://www.tracopower.com/overview/thr20wi">www.tracopower.com/overview/thr20wi</a>

All specifications valid at nominal voltage, full load and +25°C after warm-up time unless otherwise stated.

## EMC Specifications

EMI Emissions	- Conducted Emissions	EN 55011 class A (internal filter) EN 55032 class A (internal filter) FCC Part 15 class A (internal filter)
	- Radiated Emissions	EN 55011 class A (with external filter) EN 55032 class A (with external filter) FCC Part 15 class A (with external filter)
		External filter proposal: <a href="http://www.tracopower.com/overview/thr20wi">www.tracopower.com/overview/thr20wi</a>
EMS Immunity	- Electrostatic Discharge	EN 55024 (IT Equipment) Air: EN 61000-4-2, ±8 kV, perf. criteria A
	- RF Electromagnetic Field	Contact: EN 61000-4-2, ±6 kV, perf. criteria A EN 61000-4-3, 10 V/m, perf. criteria A
	- EFT (Burst) / Surge	EN 61000-4-4, ±2 kV, perf. criteria A EN 61000-4-5, ±2 kV, perf. criteria A
		Ext. input component: 24 Vin models: 390µF chemi-con KY 48 Vin models: 330 µF chemi-con KY 110 Vin models: 390µF chemi-con KXJ
	- Conducted RF Disturbances	EN 61000-4-6, 10 Vrms, perf. criteria A
	- PF Magnetic Field	Continuous: EN 61000-4-8, 100 A/m, perf. criteria A 1 s: EN 61000-4-8, 1000 A/m, perf. criteria A

## General Specifications

Relative Humidity		95% max. (non condensing)
Temperature Ranges	- Operating Temperature	-40°C to +80°C
	- Case Temperature	-40°C to +90°C (with Heat Sink)
	- Storage Temperature	+105°C max.
		-50°C to +125°C
Power Derating	- High Temperature	See application note: <a href="http://www.tracopower.com/overview/thr20wi">www.tracopower.com/overview/thr20wi</a>
Cooling System		Natural convection (20 LFM)
Remote Control	- Voltage Controlled Remote	On: 3.5 to 12 VDC or open circuit Off: 0 to 1.2 VDC or short circuit Refers to 'Remote' and '-Vin' Pin
	- Off Idle Input Current	2.5 mA typ.
	- Remote Pin Input Current	-0.5 to 0.5 mA
Switching Frequency		260 - 310 kHz (PWM) 280 kHz typ. (PWM)
Insulation System		Reinforced Insulation
Working Voltage (rated)		250 VAC
Isolation Test Voltage	- Input to Output, 60 s	3'000 VAC
	- Input to Case, 60 s	1'500 VAC
	- Output to Case, 60 s	1'500 VAC
Isolation Resistance	- Input to Output, 500 VDC	1'000 MΩ min.
Isolation Capacitance	- Input to Output, 100 kHz, 1 V	1'500 pF typ.
Reliability	- Calculated MTBF	665'000 h (MIL-HDBK-21 7F, ground benign)
Environment	- Vibration	EN 61373
	- Mechanical Shock	EN 61373
Housing Material		Red Copper, Powder Coating
Base Material		Non-conductive FR4 (UL94 V-0 rated)
Isolation Frame Material		Non-conductive black Plastic (UL94 V-0 rated)
Potting Material		Epoxy (UL 94 V-0 rated)
Pin Material		Copper Alloy (C6801)
Pin Foundation Plating		Nickel (2 - 4 µm)
Pin Surface Plating		Tin (3 - 5 µm), matte
Soldering Profile		260°C / 10 s max.
Connection Type		THD (Through-Hole Device)

All specifications valid at nominal voltage, full load and +25°C after warm-up time unless otherwise stated.

Weight	40.5 g
Thermal Impedance	12.1 K/W 9.8 K/W (with Heat Sink)
Environmental Compliance	- REACH Declaration <a href="http://www.tracopower.com/info/reach-declaration.pdf">www.tracopower.com/info/reach-declaration.pdf</a> REACH SVHC list compliant REACH Annex XVII compliant - RoHS Declaration <a href="http://www.tracopower.com/info/rohs-declaration.pdf">www.tracopower.com/info/rohs-declaration.pdf</a> Exemptions: 7a (RoHS exemptions refer to the component concentration only, not to the overall concentration in the product (O5A rule). The SCIP number is provided on request.)


### Supporting Documents

Overview Link (for additional Documents)

[www.tracopower.com/overview/thr20wi](http://www.tracopower.com/overview/thr20wi)

### Outline Dimensions

#### Standard version

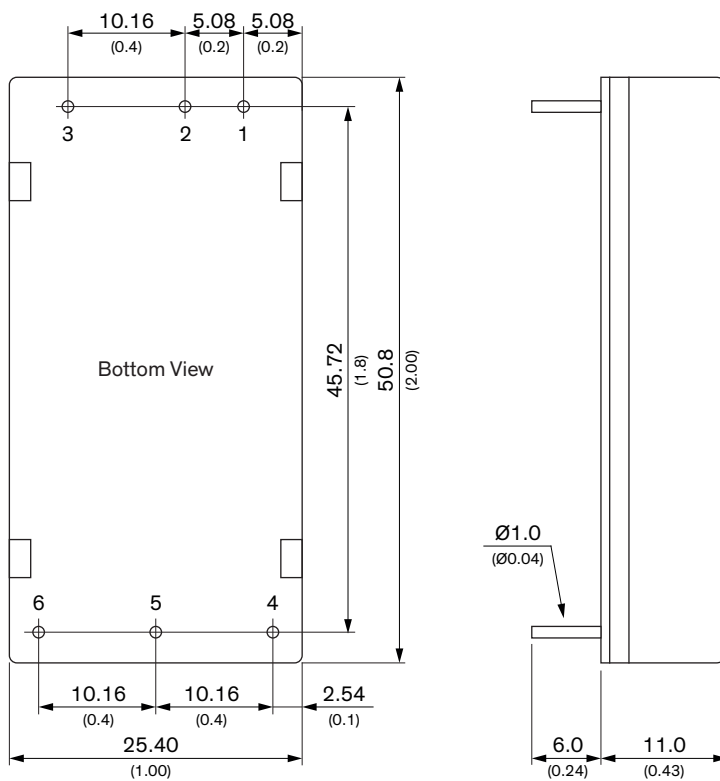


Dimensions in mm (inch)  
Tolerances: x.x ±0.75 (±0.03)  
x.xx ±0.25 (±0.01)  
Pin diameter ±0.05 (±0.002)

#### Pinout

Pin	Single	Dual
1	+Vin (Vcc)	+Vin (Vcc)
2	-Vin (GND)	-Vin (GND)
3	Remote On/Off	Remote On/Off
4	+Vout	+Vout
5	-Vout	Common
6	Trim	-Vout

All specifications valid at nominal voltage, full load and +25°C after warm-up time unless otherwise stated.

**Alternative Pinning version**

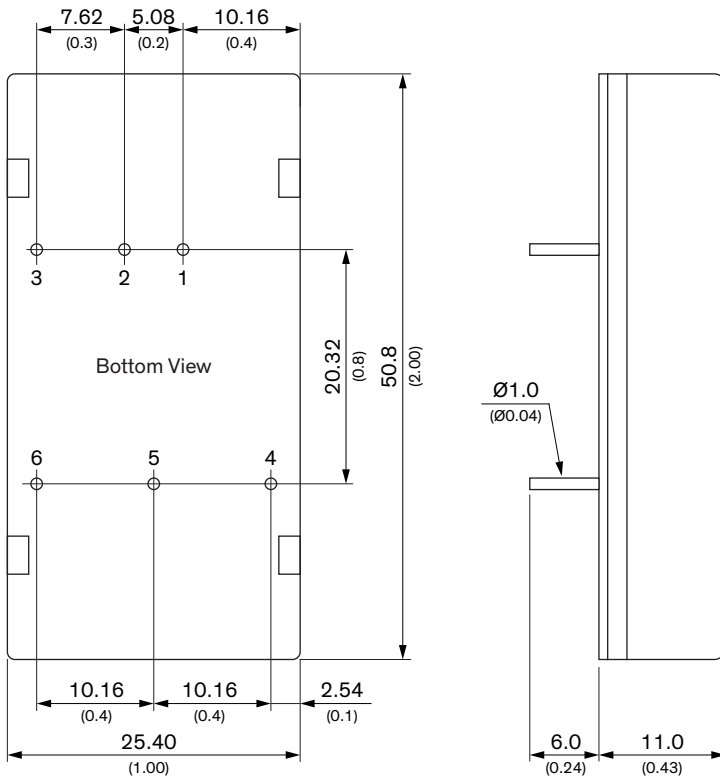

Dimensions in mm (inch)  
 Tolerances: x.x ±0.75 (±0.03)  
 x.xx ±0.25 (±0.01)  
 Pin diameter ±0.05 (±0.002)

Pinout		
Pin	Single	Dual
1	+Vin (Vcc)	+Vin (Vcc)
2	-Vin (GND)	-Vin (GND)
3	Remote On/Off	Remote On/Off
4	+Vout	+Vout
5	Trim	Common
6	-Vout	-Vout

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Isolated DC/DC Converters](#) category:*

*Click to view products by [TRACO Power](#) manufacturer:*

Other Similar products are found below :

[ESM6D044440C05AAQ](#) [FMD15.24G](#) [PSL486-7LR](#) [Q48T30020-NBB0](#) [18362](#) [JAHW100Y1](#) [SPB05C-12](#) [SQ24S15033-PS0S](#) [19-130041](#)  
[CE-1003](#) [RDS180245](#) [MAU228](#) [J80-0041NL](#) [DFC15U48D15](#) [XGS-0512](#) [XGS-1205](#) [XGS-1212](#) [XGS-2412](#) [XGS-2415](#) [XKS-1215](#) [06322](#)  
[NCT1000N040R050B](#) [SPB05B-15](#) [SPB05C-15](#) [L-DA20](#) [DCG40-5G](#) [QME48T40033-PGB0](#) [XKS-2415](#) [XKS-2412](#) [XKS-1212](#) [XKS-1205](#)  
[XKS-0515](#) [XGS-2405](#) [XGS-1215](#) [XGS-0515](#) [73-551-5038I](#) [AK1601-9RT](#) [VI-R5022-EXWW](#) [PSC128-7iR](#) [RPS8-350ATX-XE](#)  
[DAS1004812](#) [PQA30-D24-S24-DH](#) [VI-M5F-CQ](#) [VI-LN2-EW](#) [VI-PJW01-CZY](#) [CK2540-9ERT](#) [AK-1615-7R](#) [700DNC40-CON-KIT-8G](#)  
[350DNC40-CON-KIT-9G](#) [088-101348-G](#)