


Features

- ◆ Single-in-line package (SIP)
- ◆ Fully SMD-design
- ◆ Isolated single and dual output
- ◆ I/O isolation 1'000 VDC
- ◆ Unregulated device
- ◆ High efficiency up to 83 %
- ◆ Industry standard pinout
- ◆ 100% burn-in (8 h)
- ◆ Lead free design, RoHS compliant
- ◆ 3-year product warranty

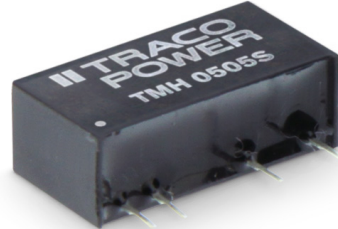

The TMH series are ultra miniature, isolated 2 Watt DC/DC-converters in a Single-in-Line package (SIP). Requiring only 1.5 cm² board space they offer the ideal solution in many space critical applications for board level power distribution. The use of SMD-technology makes it possible to offer a product with high performance at low cost.

Models

Ordercode	Input voltage	Output voltage	Output current max.	Efficiency typ.
TMH 0505S	5 VDC ±10%	5 VDC	400 mA	76 %
TMH 0512S		12 VDC	165 mA	80 %
TMH 0515S		15 VDC	133 mA	80 %
TMH 0505D		±5 VDC	±200 mA	77 %
TMH 0512D		±12 VDC	±83 mA	79 %
TMH 0515D		±15 VDC	±66 mA	79 %
TMH 1205S	12 VDC ±10%	5 VDC	400 mA	78 %
TMH 1212S		12 VDC	165 mA	82 %
TMH 1215S		15 VDC	133 mA	83 %
TMH 1205D		±5 VDC	±200 mA	79 %
TMH 1212D		±12 VDC	±83 mA	82 %
TMH 1215D		±15 VDC	±66 mA	82 %
TMH 2405S	24 VDC ±10%	5 VDC	400 mA	77 %
TMH 2412S		12 VDC	165 mA	81 %
TMH 2415S		15 VDC	133 mA	82 %
TMH 2405D		±5 VDC	±200 mA	79 %
TMH 2412D		±12 VDC	±83 mA	81 %
TMH 2415D		±15 VDC	±66 mA	82 %

Input Specifications

Input current no load / full load	5 Vin models	60 mA / 510 mA typ.
	12 Vin models	30 mA / 200 mA typ.
	24 Vin models	15 mA / 100 mA typ.
Surge voltage (1 s max.)	5 Vin models	9 V max.
	12 Vin models	18 V max.
	24 Vin models	30 V max.
Reflected input ripple current	can be reduced by ext. 1 – 3.3 μ F polyester film capacitor	
Input filter	internal capacitors	

Output Specifications

Voltage set accuracy	± 1 % typ. / ± 3 % max.	
Voltage balance (dual output models, balanced loads)	0.1 % typ. / 1 % max.	
Regulation	– Input variation (1 % input voltage change)	1.2 % typ. / 1.5 % max.
	– Load variation (20 – 100 %)	5 to 11 % max. (depending on model)
Ripple and noise (20 MHz Bandwidth)	100 mVp-p typ. / 150 mVp-p max.	
Temperature coefficient	± 0.01 %/K typ. / ± 0.02 %/K max.	
Short circuit protection	limited 0.5 s max.	
Capacitive load	– Single output models	470 μ F max.
	– Dual output models	390 μ F max.

General Specifications

Temperature ranges	– Operating	–40°C to +85°C
	– Case temperature	+105°C max.
	– Storage	–50°C to +125°C
Derating (natural convection)	3 %/K above +70°C	
Humidity (non condensing)	95 % rel H max.	
Reliability, calculated MTBF (MIL-HDBK-217F at +25°C, ground benign)	>2'000'000 h	
Isolation voltage (60 s)	– Input/Output	1'000 VDC
Isolation capacitance	– Input/Output	80 pF typ.
Isolation resistance	– Input/Output	>1'000 Mohm
Switching frequency	50 to 100 kHz (frequency modulation)	
Environmental compliance	– Reach	www.tracopower.com/info/reach-declaration.pdf
	– RoHS	RoHS directive 2002/95/EC


All specifications valid at nominal input voltage, full load and +25°C after warm-up time unless otherwise stated.

Physical Specifications

Casing material	non conductive black plastic (UL 94-V0 rated)
Package weight	2.7 g (0.1oz)
Soldering temperature	max. +265°C / 10 s

Supporting documents: www.tracopower.com/overview/tmh

Outline Dimensions mm (inches)

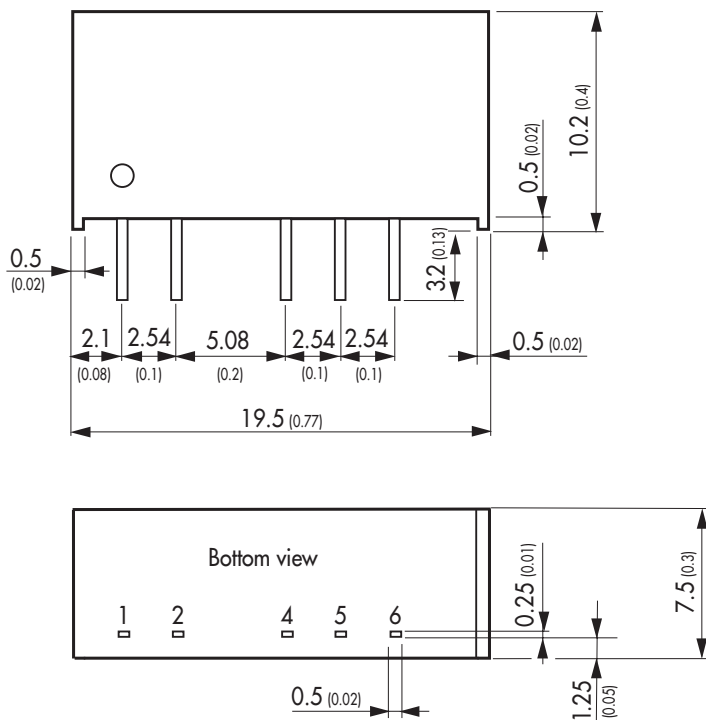

Pin-Out		
Pin	Single	Dual
1	+Vin (Vcc)	+Vin (Vcc)
2	-Vin (GND)	-Vin (GND)
4	-Vout	-Vout
5	No pin	Common
6	+Vout	+Vout

Tolerances ± 0.25 (± 0.01)
pins ± 0.05 (± 0.002)

Specifications can be changed without notice! Make sure you are using the latest documentation, downloadable at www.tracopower.com

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Isolated DC/DC Converters](#) category:

Click to view products by [TRACO Power](#) manufacturer:

Other Similar products are found below :

[ESM6D044440C05AAQ](#) [FMD15.24G](#) [PSL486-7LR](#) [Q48T30020-NBB0](#) [JAHW100Y1](#) [SPB05C-12](#) [SQ24S15033-PS0S](#) [18952](#) [19-130041](#)
[CE-1003](#) [CE-1004](#) [GQ2541-7R](#) [RDS180245](#) [MAU228](#) [J80-0041NL](#) [DFC15U48D15](#) [XGS-0512](#) [XGS-1205](#) [XGS-1212](#) [XGS-2412](#) [XGS-2415](#) [XKS-1215](#) [06322](#) [NCT1000N040R050B](#) [SPB05B-15](#) [SPB05C-15](#) [L-DA20](#) [DCG40-5G](#) [QME48T40033-PGB0](#) [XKS-2415](#) [XKS-2412](#)
[XKS-1212](#) [XKS-1205](#) [XKS-0515](#) [XKS-0505](#) [XGS-2405](#) [XGS-1215](#) [XGS-0515](#) [PS9Z-6RM4](#) [73-551-5038I](#) [AK1601-9RT](#) [VI-N61-CM](#) [VI-R5022-EXWW](#) [PSC128-7iR](#) [RPS8-350ATX-XE](#) [DAS1004812](#) [PQA30-D24-S24-DH](#) [VI-M5F-CQ](#) [VI-LN2-EW](#) [VI-PJW01-CZY](#)