


Power Inductors

Model HM72L-0420 series




Features:

- Operating Temperature Range -55°C to $+125^{\circ}\text{C}$
- Ambient Temperature, Maximum $+85^{\circ}\text{C}$
- Temperature Rise, 40°C
- RoHS Compliant



All parts are Pb-free and comply with EU Directive 2011/65/EU (RoHS2)

Schematic



Specifications @ 25°C

Part Number	Inductance ($\mu\text{H} \pm 20\%$ @0A)	DCR (m Ω) Typ	DCR (m Ω) Max	Irms (A)	Isat (A)	Part Number	Inductance ($\mu\text{H} \pm 20\%$ @0A)	DCR (m Ω) Typ.	DCR (m Ω) Max	Irms (A)	Isat (A)
HM72L-0420R10LFTR	0.10	3.5	4.0	12.0	22.0	HM72L-04201R2LFTR	1.20	24.0	27.0	4.5	7.0
HM72L-0420R15LFTR	0.15	6.0	6.6	9.0	13.0	HM72L-04201R5LFTR	1.50	38.0	46.0	4.0	6.0
HM72L-0420R22LFTR	0.22	6.0	6.6	9.0	12.5	HM72L-04202R2LFTR	2.20	52.0	58.0	3.0	5.0
HM72L-0420R33LFTR	0.33	9.6	13.0	8.0	12.0	HM72L-04203R3LFTR	3.30	74.0	87.0	2.5	4.0
HM72L-0420R47LFTR	0.47	12.5	14.0	7.0	9.5	HM72L-04204R7LFTR	4.70	98.0	110.0	2.0	3.5
HM72L-0420R56LFTR	0.56	14.0	16.0	6.5	10.0	HM72L-04205R6LFTR	5.60	105.0	115.0	1.8	3.0
HM72L-0420R60LFTR	0.60	14.0	16.0	6.5	10.0	HM72L-04206R8LFTR	6.80	160.0	175.0	1.5	2.5
HM72L-0420R68LFTR	0.68	16.0	18.0	6.0	9.0	HM72L-0420100LFTR	10.0	256.0	282.0	1.2	2.2
HM72L-04201R0LFTR	1.00	24.0	27.0	4.5	7.0						

- Notes:
- (1) Isat is the saturation current at which inductance rolls off approximately 30% from its initial (zero DC)
 - (2) Iirms is the approximate current at which $\Delta T = 40^{\circ}\text{C}$
 - (3) Operating Temperature Range -55°C to $+125^{\circ}\text{C}$

General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.









TT Electronics | BI Technologies

A-1445, Jalan Tanjung Api

25050 Kuantan Pahang Darul Makmur, Malaysia | Ph: +60 9 565 8888









www.ttelectronicsmagnetics.com/customer-service-enquiry


Electrical Specifications @ 25

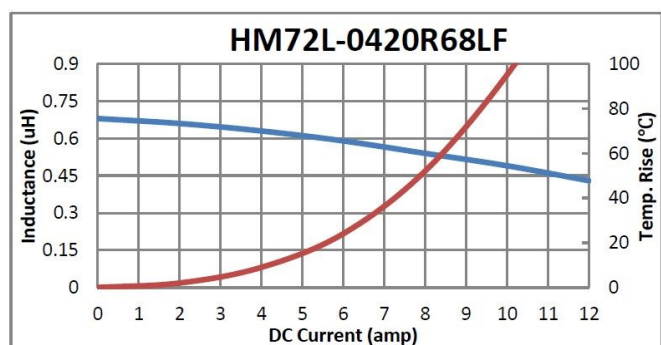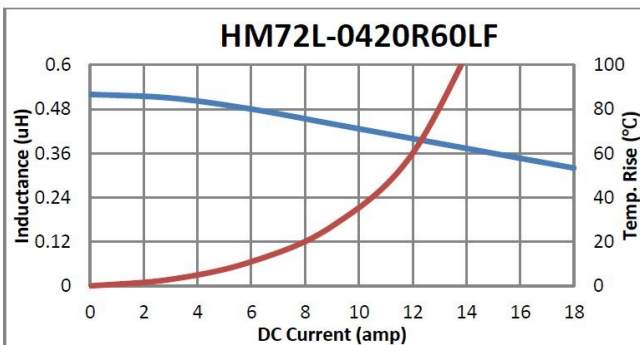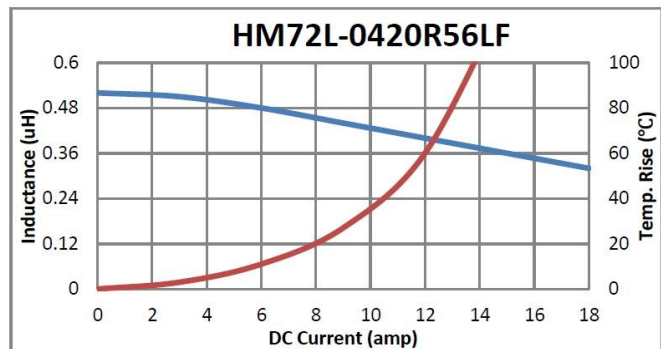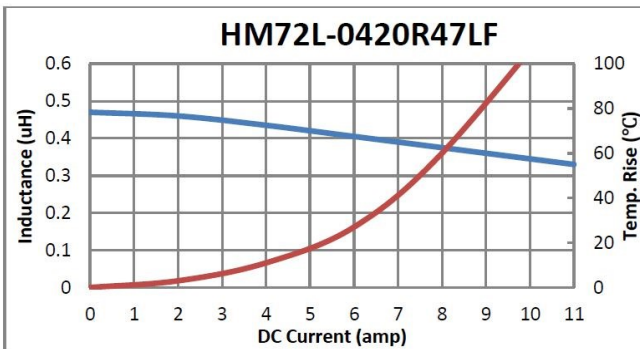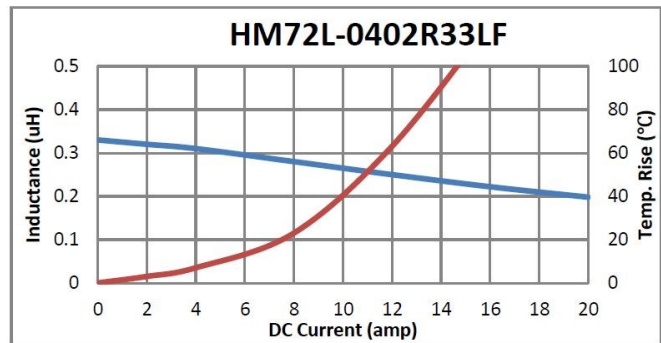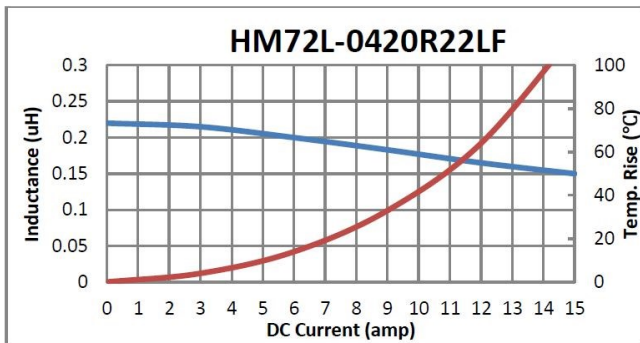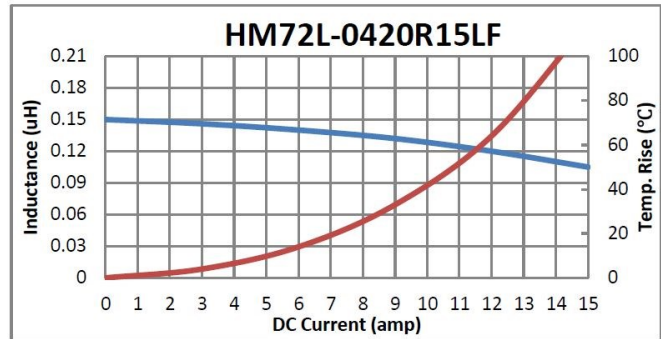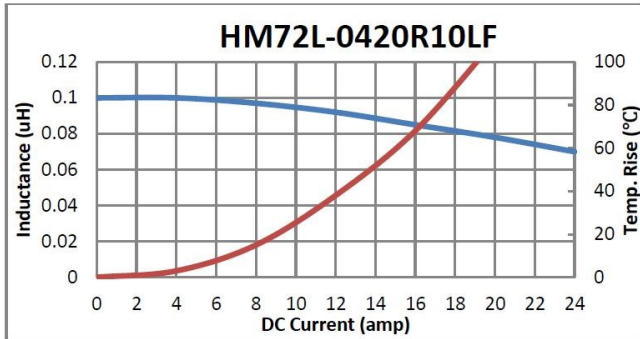


General Note
 TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

Electrical Specifications @ 25°C

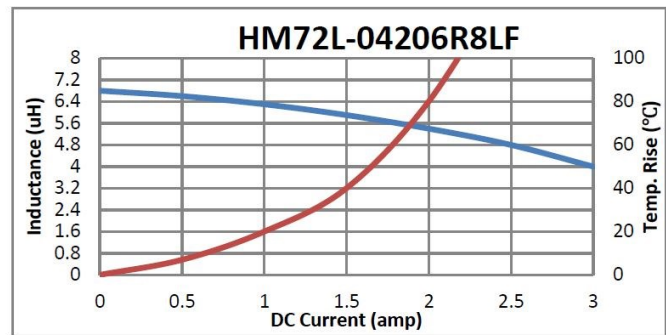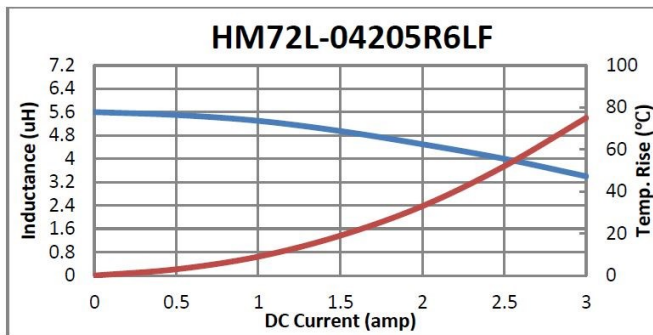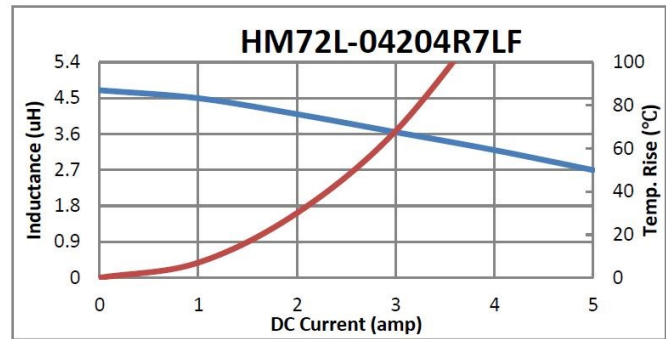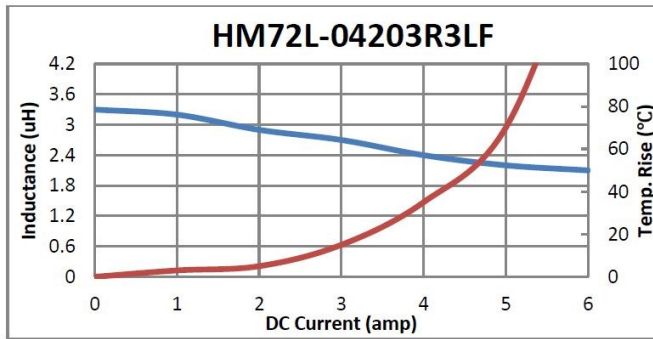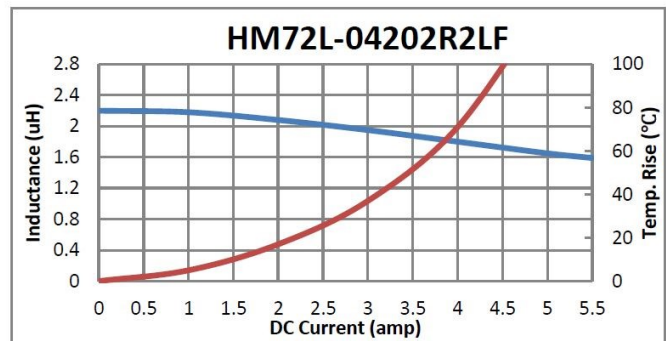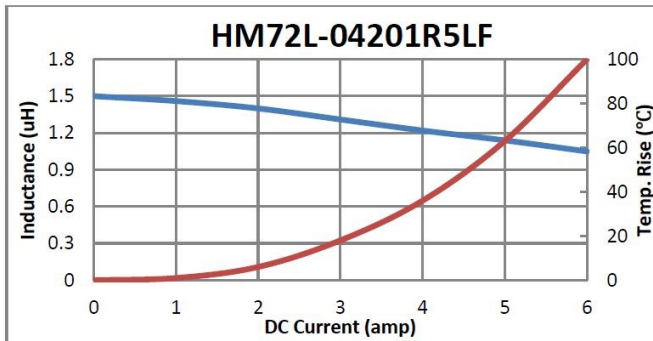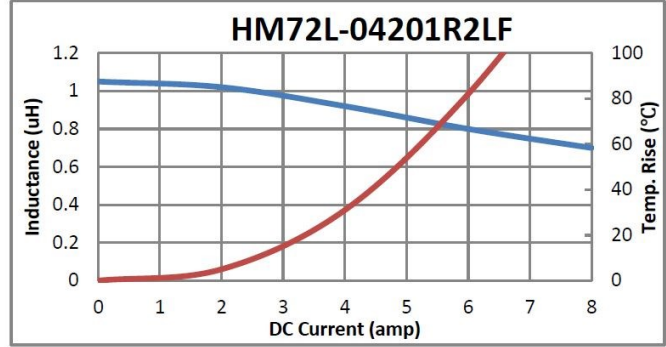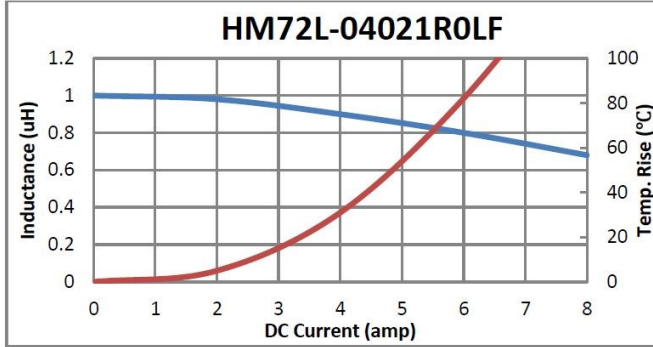

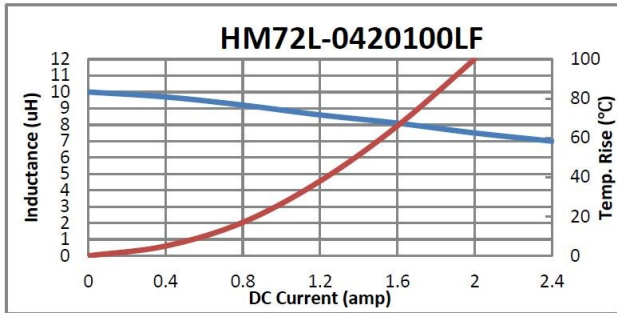

Outline dimensions (mm)

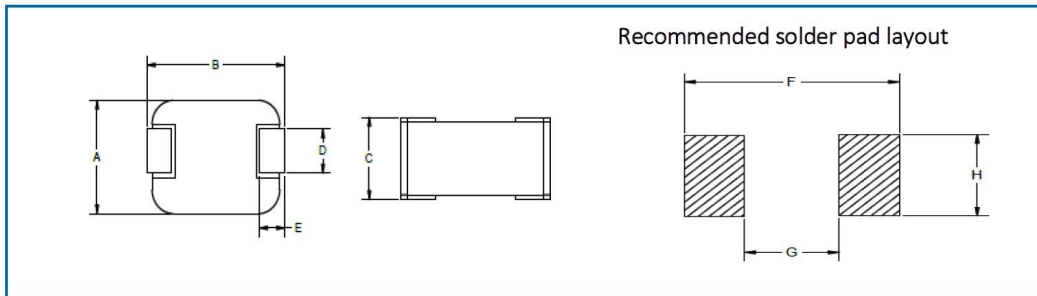


CASE SIZE	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)	F(mm)	G(mm)	H(mm)
0420 series	4.05 ± 0.25	4.45 ± 0.25	2	1.5 ± 0.3	0.8 ± 0.3	4.95	2.15	2.3

Packaging

Standard:	Embossed Tape and Reel	
	Diameter:	All case size = 13" (330mm)
	Reel:	Case size 0420 = 2,000 units

Ordering information

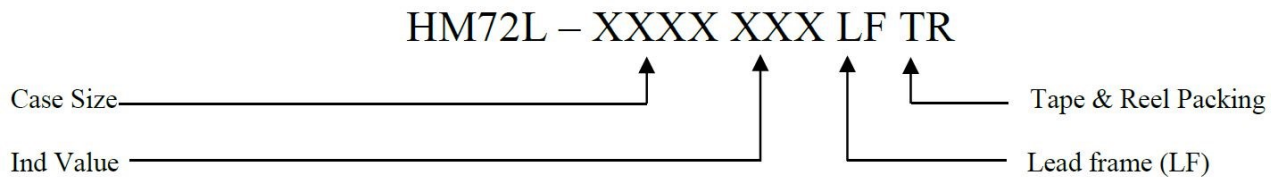

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Fixed Inductors](#) category:

Click to view products by [TT Electronics](#) manufacturer:

Other Similar products are found below :

[CR43NP-680KC](#) [CR54NP-820KC](#) [CR54NP-8R5MC](#) [CTX32CT-100](#) [70F224AI](#) [MGDQ4-00004-P](#) [MHL1ECTTP18NJ](#) [MHL1JCTTD12NJ](#)
[PE-51506NL](#) [PE-53601NL](#) [PE-53602NL](#) [PE-53630NL](#) [PE-53824SNLT](#) [PE-92100NL](#) [PG0434.801NLT](#) [PG0936.113NLT](#) [9310-16](#) [PM06-2N7](#) [PM06-39NJ](#) [A01TK](#) [1206CS-471XJ](#) [HC2-2R2TR](#) [HC2LP-R47-R](#) [HC3-2R2-R](#) [1206CS-151XG](#) [RCH664NP-140L](#) [RCH664NP-4R7M](#)
[RCH8011NP-221L](#) [RCP1317NP-332L](#) [RCP1317NP-391L](#) [RCR1010NP-470M](#) [RCR110DNP-331L](#) [DH2280-4R7M](#) [DS1608C-106](#) [ASPI-4020HI-R10M-T](#) [B10TJ](#) [B82477P4333M](#) [B82498B3101J000](#) [B82498B3680J000](#) [ELJ-RE27NJF2](#) [1812CS-153XJ](#) [1812CS-183XJ](#) [1812CS-223XJ](#) [1812LS-104XJ](#) [1812LS-105XJ](#) [1812LS-124XJ](#) [1812LS-154XJ](#) [1812LS-223XJ](#) [1812LS-224XJ](#) [1812LS-563XJ](#)