

Product Features

1. High precision and high frequency stability
2. Extremely good for reducing EMI effect
3. Provide clean and stable reference clock to a wide variety of ICs
4. The best choice of Bluetooth , Wi-Fi and other short range wireless communication
5. RoHS and REACH Compliant , Pb-free , Halogen-free
6. Industry Standard Package :
3.2 x 2.5 x 0.7 mm (7M Series)

Application :

- Wireless Communication
- CPE , Router , Ethernet Switch , Gateway , Set-Top Box
- Notebook , Tablet , Server , Cloud
- Industry



Test condition

Ambient temperature : $25 \pm 5^{\circ}\text{C}$


Relative humidity : 40% ~ 70%

● Table 1 . Electrical Specifications

| Parameters | Symbol | Min. | Typ. | Max. | Units | Notes |
|--|--------|----------------|------|------|--------------------|--|
| Nominal Frequency | F | 8 ~ 80 | | | MHz | |
| Frequency Tolerance | FT | ± 10 | | | ppm | @ $25^{\circ}\text{C} \pm 3^{\circ}\text{C}$ |
| Frequency Stability Over Operating Temp. Range (Reference 25°C) | ST | ± 20 | | | ppm | @ $-40 \sim 85^{\circ}\text{C}$ |
| | | ± 30 | | | | @ $-40 \sim 105^{\circ}\text{C}$ |
| Operating Temperature | Topr | -40 | 25 | 105 | $^{\circ}\text{C}$ | |
| Load Capacitance | CL | 6~20 | | | pF | |
| Drive Level | DL | - | 100 | 300 | μW | |
| Equivalent Series Resistance | ESR | - | - | 300 | Ohm | 8~12MHz |
| | | - | - | 80 | | 12~16MHz |
| | | - | - | 50 | | 16~40MHz |
| | | - | - | 30 | | >40MHz |
| Aging | - | $\pm 3, \pm 5$ | | | ppm | 1st Year |

Note : The table shows common spec. if you have special spec. requirement , please feel free to contact our salesperson.

● Dimensions

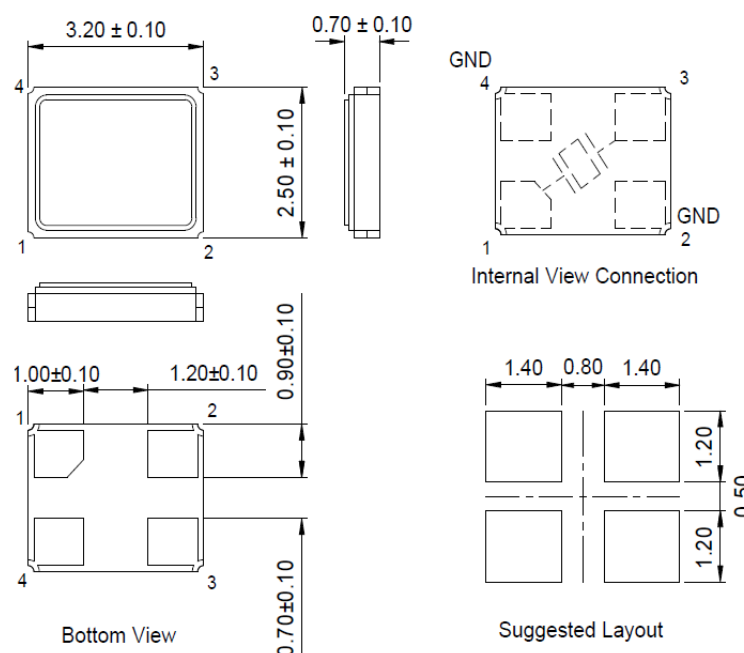

(Unit : mm)

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Crystals category](#):

Click to view products by [TXC Corporation manufacturer](#):

Other Similar products are found below :

[CX3225GB25000M0PPSZ1](#) [718-13.2-1](#) [7A-40.000MAAE-T](#) [FL2000085](#) [99-BU](#) [9B-15.360MBBK-B](#) [9C-7.680MBBK-T](#) [H10S-12.000-18-EXT-TR](#) [ABC2-6.000MHZ-D4Z-T](#) [ABLS-20.000MHZ-D2-T](#) [ABS071-32.768KHZ-6-T](#) [R38-32.768-12.5-5PPM-NPB](#) [BTD1062E05A-513](#) [21U15A-21.4MHZ](#) [RTX-781DF1-S-20.950](#) [LFXTAL066198Cutt](#) [9C-14.31818MBBK-T](#) [A-11.000MHZ-27](#) [ABL-27.000MHZ-B4Y-T](#) [ABM11-132-24.000MHZ-T3](#) [ABM3B1-25.000MHZ-D2Y-T](#) [SPT2A-.032768B](#) [SPT2A.032768G](#) [LFXTAL065253Cutt](#) [LFXTAL066431Cutt](#) [XT9S20ANA14M7456](#) [XT9SNLANA16M](#) [7A-24.576MBBK-T](#) [7B-30.000MBBK-T](#) [CX2520DB16000H0HPQCC](#) [MMCC2R32.7680KHZ](#) [6504-202-1501](#) [6526-202-1501](#) [ABLS-12.000MHZ-B2Y-T](#) [7A-10.000MBBK-T](#) [SG636PCE-20.000MC](#) [3404](#) [CM315D32768EZFT](#) [C1E-24.000-7-2020-R](#) [C1E-19.200-12-1530-X-R](#) [C1E-16.000-12-1530-X-R](#) [ABM11-16.000MHZ-9-B1U-T](#) [FL5000014](#) [EUCA18-3.1872M](#) [FX0800015](#) [425F35E027M0000](#) [FP0800018](#) [MS3V-T1R-32.768kHz-7pF-20PPM-TA-QC-Au](#) [VXM7-1C1-16M000](#) [MS3V-T1R-32.768kHz-9pF-20PPM-TA-QC-Au](#)