

SMD kHz Crystals

2.0 x 1.2 x 0.6 (max) mm 9H T11 Series



Features

- Ceramic surface mount package.
- Applications in mobile phone, Notebook and DSC.
- RoHS Compliant / Pb Free.


Electrical Specifications

Item / Type	9H T11
Normal Frequency	32.768 KHz
Frequency Tolerance(at 25 °C)	± 20 ppm , or specify
Operation Temperature Range	- 40 ~ + 85 °C
Shunt Capacitance (C0)	1.3pF typical
Motional Capacitance (C1)	6.4fF typical
Insulation Resistance (IR)	500 MΩ Min.
Drive Level (DL)	0.5 μW Max.
Load Capacitance(CL)	12.5 pF , other spec.
Turnover Temperature (Ti)	25 °C ± 5 °C
Parabolic Coefficient (B)	(- 0.03 ± 0.01) * 10 ⁻⁶ / °C ²
Aging (at 25 °C)	± 3 ppm at first year
Storage Temperature Range	- 55 ~ +125 °C

Equivalent Series Resistance(ESR)

T11
 90 KΩ Max

Dimensions

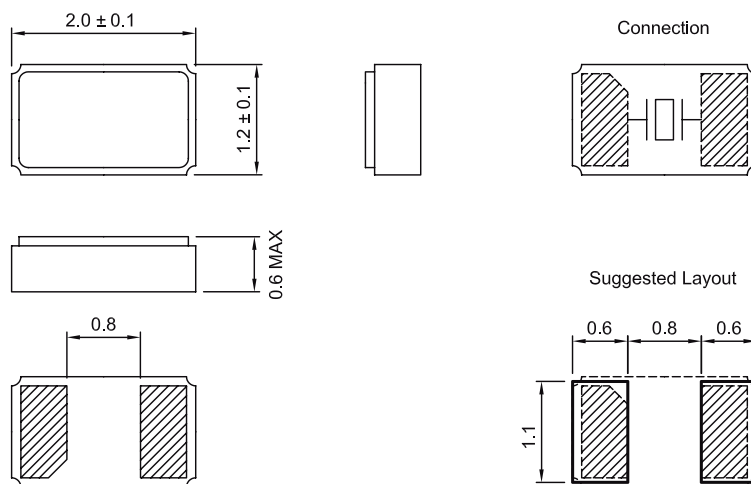

Units: mm

Remark : Specification subject to change without prior notice. Please confirm with our sales. <http://www.txccorp.com>

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Crystals](#) category:

Click to view products by [TXC Corporation](#) manufacturer:

Other Similar products are found below :

[CX3225GB25000M0PPSZ1](#) [718-13.2-1](#) [MC405 32.0000K-R3:PURE SN](#) [7A-40.000MAAE-T](#) [FL2000085](#) [99-BU](#) [9B-15.360MBBK-B](#) [9C-7.680MBBK-T](#) [H10S-12.000-18-EXT-TR](#) [ABC2-6.000MHZ-D4Z-T](#) [ABLS-20.000MHZ-D2-T](#) [ABS071-32.768KHZ-6-T](#) [R38-32.768-12.5-5PPM-NPB](#) [BTD1062E05A-513](#) [21U15A-21.4MHZ](#) [RTX-781DF1-S-20.950](#) [LFXTAL066198Cutt](#) [9C-14.31818MBBK-T](#) [A-11.000MHZ-27](#) [ABL-27.000MHZ-B4Y-T](#) [ABM11-132-24.000MHZ-T3](#) [ABM3B1-25.000MHZ-D2Y-T](#) [SPT2A-.032768B](#) [SPT2A.032768G](#) [SSPT7F-9PF20-R](#) [FX325BS-38.88EEM1201](#) [LFXTAL065253Cutt](#) [LFXTAL066431Cutt](#) [XT9S20ANA14M7456](#) [XT9SNLANA16M](#) [646G-24-2](#) [7A-24.576MBBK-T](#) [7B-30.000MBBK-T](#) [7A-14.31818MBBK-T](#) [6504-202-1501](#) [6526-202-1501](#) [ABLS-12.000MHZ-B2Y-T](#) [ABLS-10.000MHZ-D3W-T](#) [7A-10.000MBBK-T](#) [SG636PCE-20.000MC](#) [3404](#) [E1SAA18-25.000M TR](#) [CM315D32768EZFT](#) [C1E-24.000-7-2020-R](#) [C1E-19.200-12-1530-X-R](#) [C1E-16.000-12-1530-X-R](#) [FL5000014](#) [EUCA18-3.1872M](#) [FX0800015](#) [425F35E027M0000](#)