
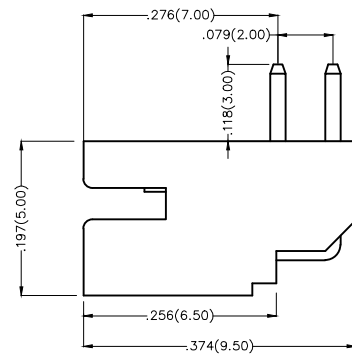



REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

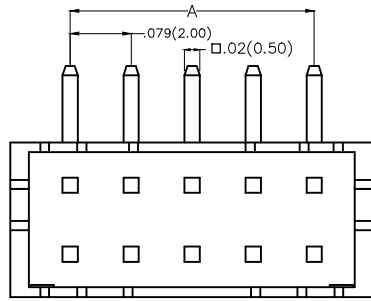


Electrical

Current Rating: 3.0A AC(rms)/DC
Voltage Rating: 250V AC(rms)/DC
Contact Resistance: 10 mΩ Max
Insulation Resistance: 1000 MΩ MIN
Withstanding Voltage: 800V AC r.m.s
Temperature Range—Operating: -25°C~+85°C
Material and Plating
Housing: PA46(UL 94V-0)
Contact Pin: Brass
Plating: Tin Plated


2x4—2x20Circuits

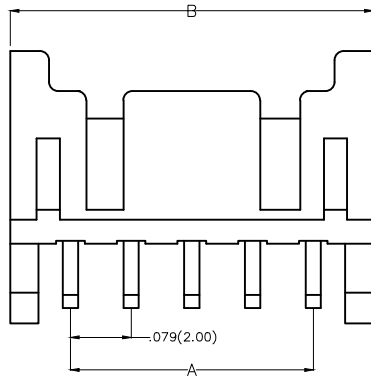

2x2Circuits

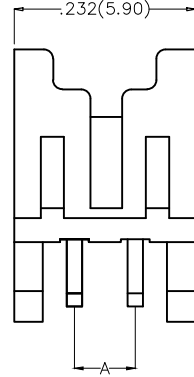


2x3Circuits

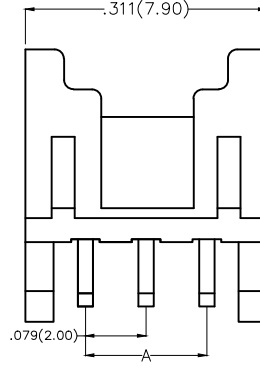

Ordering Information

FWF 200 06 — D XX B 2 2 W5 B
1 2 3 4 5 6 7 8 9 10

1	Category FWF—Wafer	2	Series Number 200—Pitch2.0mm	3	Distinction No. 06	4	Row Option D—Double Row	5	Circuits XX	6	Entry Angle B—90° Angle
7	Plating 2—Tin Plated	8	Material—Resin 2—PA46	9	Color—Resin W5—White	10	Packaging B—PE Bag				

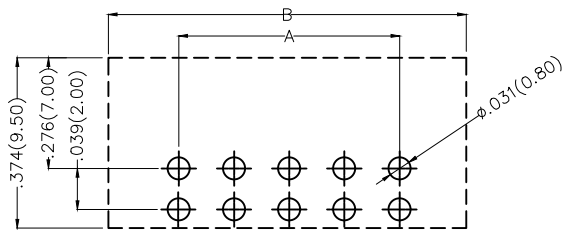

Recommended P.C.Board Layout

 THIRD ANGLE PROJECTION	GENERAL TOLERANCES (UNLESS SPECIFIED) X.±.012(0.30) X.'±5' X.X±.008(0.20) .X'±2' X.XX±.006(0.15) .XX'±1' X.XXX±.004(0.10) .XXX'±0.5'		APPROVE BY FRANK	DATE 18/JUN/13	PART NO. FWF20006—DXXB22W5B	ITEM NO. FWF20006	 TXGA Leader Of Industry
	DESIGN UNITS Inch (metric)	SCALE 5:1	SIZE A4	CHECKED BY JACOB	DATE 18/JUN/13	TITLE Wire to Board (Wafer) Pitch 2.0mm 90° Angl (DIP)	
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION							

1 2 3 4 5 6 7 8

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

Circuits (n)	Part No.	Dimensions(in/mm)		Circuits (n)	Part No.	Dimensions(in/mm)	
		A	B			A	B
4	FWF20006-D04B22W5B	.079(2.00)	.232(5.90)	24	FWF20006-D24B22W5B	.866(22.00)	1.020(25.90)
6	FWF20006-D06B22W5B	.157(4.00)	.311(7.90)	26	FWF20006-D26B22W5B	.945(24.00)	1.098(27.90)
8	FWF20006-D08B22W5B	.236(6.00)	.390(9.90)	28	FWF20006-D28B22W5B	1.024(26.00)	1.177(29.90)
10	FWF20006-D10B22W5B	.315(8.00)	.469(11.90)	30	FWF20006-D30B22W5B	1.102(28.00)	1.256(31.90)
12	FWF20006-D12B22W5B	.394(10.00)	.547(13.90)	32	FWF20006-D32B22W5B	1.181(30.00)	1.335(33.90)
14	FWF20006-D14B22W5B	.472(12.00)	.626(15.90)	34	FWF20006-D34B22W5B	1.260(32.00)	1.413(35.90)
16	FWF20006-D16B22W5B	.551(14.00)	.705(17.90)	36	FWF20006-D36B22W5B	1.339(34.00)	1.492(37.90)
18	FWF20006-D18B22W5B	.630(16.00)	.783(19.90)	38	FWF20006-D38B22W5B	1.417(36.00)	1.571(39.90)
20	FWF20006-D20B22W5B	.709(18.00)	.862(21.90)	40	FWF20006-D40B22W5B	1.496(38.00)	1.650(41.90)
22	FWF20006-D22B22W5B	.787(20.00)	.941(23.90)				

A

B

C

D

E

F

A



B

C

D

E

F

 THIRD ANGLE PROJECTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 18/JUN/13	PART NO. FWF20006-DXXB22W5B	ITEM NO. FWF20006	 Leader Of Industry	
	X.±.012(0.30)	X.±5'	CHECKED BY JACOB	DATE 18/JUN/13	TITLE Wire to Board (Wafer) Pitch 2.0mm 90° Angled (DIP)			REV 0
	DESIGN UNITS Inch (metric)	X.X±.008(0.20)	.X'±2"	DRAWN BY CHERRY	DATE 18/JUN/13	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		
	SCALE 5:1	SIZE A4	X.XX±.006(0.15)	.XX'±1"	X.XXX±.004(0.10)	.XXX'±0.5'		

1 2 3 4 5 6 7 8

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [TXGA](#) manufacturer:

Other Similar products are found below :

[57102-F02-18ULF](#) [58102-G61-06LF](#) [0009485154](#) [009176003701906](#) [0050291907](#) [00-9021-0611-00-339](#) [02.125.8002.8](#) [609-3404](#) [61062-3](#)
[622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [644827-2](#) [65495-038](#) [65692-001LF](#) [65781-018](#)
[65781-047](#) [65817-010LF](#) [65817-015LF](#) [66207-023LF](#) [67016-026LF](#) [67095-007LF](#) [68631-112](#) [68645-018](#) [68648-049](#) [699319-000](#)
[70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-4853B](#) [707-5020](#) [707-5028](#) [71.350.2428.0](#) [71961-016LF](#) [733-134](#) [754199-000](#) [760-3052](#) [787-8014-00](#)
[FCN-367T-T012/H](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [800-90-010-10-002000](#) [801-43-002-10-013000](#) [801-43-006-10-002000](#)
[803-41-018-10-001000](#)