

# FUSIBLE WIRE WOUND RESISTORS, FLAMEPROOF

## 1. Applicable Scope:

This standard specification is for use in consumer electronics, computers, telecommunications, control instruments...etc.

## 2. Part Number:

It is composed by Type, Rated Wattage, Nominal Resistance, Tolerance and Package. e.g.

<u>FKN</u>	<u>1WS</u>	<u>10R</u>	<u>J</u>	<u>T/B</u>
Type	Rated Wattage	Nominal Resistance	Tolerance	Package

### 2.1 Type :

Fusible Wire Wound Resistors, Flameproof are called "FKN".

### 2.2 Rated Wattage:

Shown by "W", such as 1WS, 2WS.

### 2.3 Nominal Resistance:

$\Omega$  is its unit, which be in accordance with JIS-C6409 article 6 (EIA RS-196A) series.

Letter "10R" indicates resistance value  $10\Omega$ .

### 2.4 Tolerance:

It is measured by Bridge-method at room temperature and expressed by a capital letter.


J =  $\pm 5\%$ .

### 2.5 Package:

T/B = tape in box; Nil = Bulk.

## 3. Rated Power:

Rated power is the value of Max load power specified at the ambient temperature of  $70^\circ\text{C}$ , and shall meet the functions of electrical and mechanical performance. When the ambient temperature surpasses above mentioned temperature, the value declines as per following DERATING CURVE.

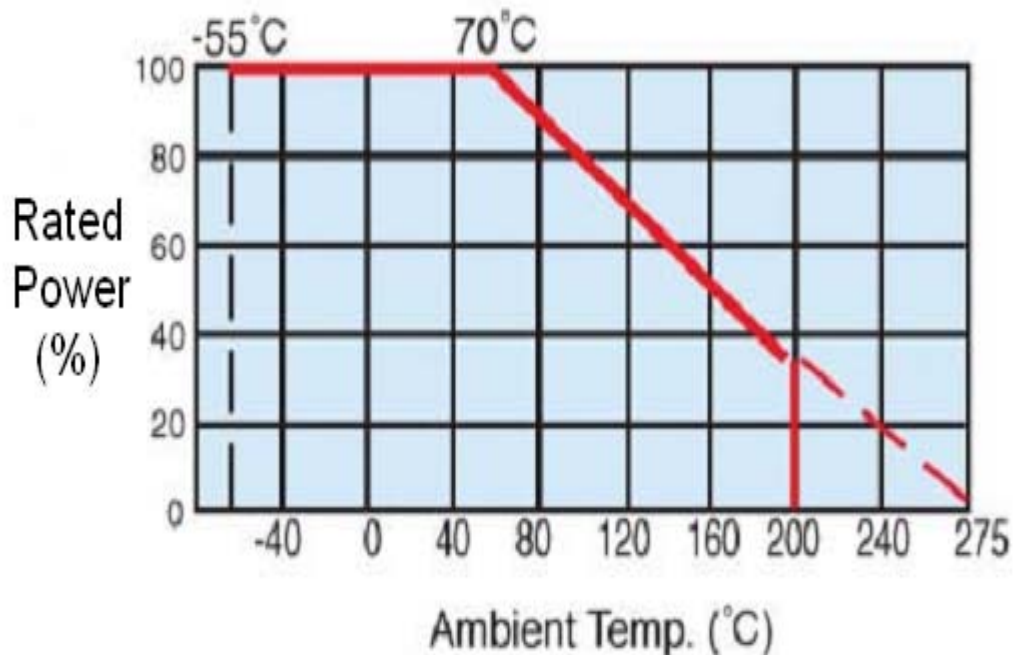

# FUSIBLE WIRE WOUND RESISTORS, FLAMEPROOF

## 3.1 Rated Voltage:

It is calculated through the following formula:


$$V = \sqrt{P \times R}$$

where V: rated voltage  
P: rated power  
R: total nominal resistance

However, in case the voltage calculated exceeds the maximum load voltage, such the maximum load voltage shall be regarded as its rated voltage, means whichever less.

## 4. Dimension and structure:

### 4.1 Dimension:

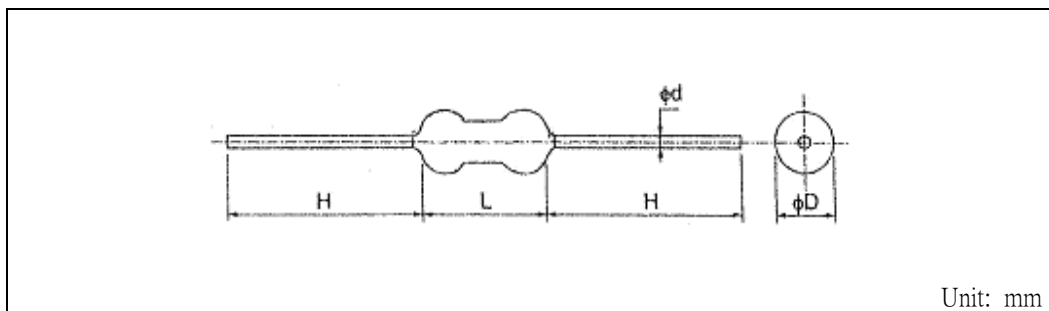

TYPE	D ± 1	L ± 1	H ± 3	d ± 0.1	Resistance Range	Dielectric Withstanding Voltage
FKN						
1WS	2.6 ± 0.5	6.8	28	0.65	1 Ω ~ 100 Ω	250V
2WS	3	9	28	0.65	1 Ω ~ 100 Ω	350V

### 4.2 STRUCTURE:

#### 4.2.1 Terminal:

Terminal is to be firmly connected with resistors element, both electrically and mechanically, and allow easy soldering.

#### 4.2.2 Coating:

Coating is done by light green flameproof paint (resistant to 800°C) or Silicon Resin which is solid enough to be free from looseness, crack and easy breakage. It is also resistant to cleaning and industrial solvents, and the paint shall be limited within 2mm of lead wires from resistor body.

#### 4.2.3 Marking:

Marking is made on resistors surface by color coding.

1st, 2nd, 3rd : nominal resistance.

4th: tolerance.

5th: black color band for fusible wire wound resistors, flameproof.

## 5. Operating Temperature Range: -55°C ~ 200°C

# FUSIBLE WIRE WOUND RESISTORS, FLAMEPROOF

---

## 6. Mechanical Performance:

### 6.1 Terminal tensile:

To fix the resistor body, a static load of 1kg. is to be gradually applied into the terminal for 10 seconds without causing any looseness and fall.

### 6.2 Twist withstand:

To bend the lead wire at the point of about 6mm from resistor body to 90°, then catch the wire at 1.2 ±0.4mm apart from the bent point end and turn it (clockwise) by 360 degrees perpendicular to the resistor axis at speed of 10 seconds per turn, and do the same counterclockwise again which constitute a whole turn. Repeat the turn 2 times without causing any break and looseness.

## 7. Electrical Performance:

### 7.1 Resistance Temperature Coefficient:

It shall be within ±300ppm/°C.

$$T.C \text{ (ppm/°C)} = [(R2 - R1) \div R1] \times [1 \div (T2 - T1)] \times 10^6$$

where

R1: resistance value at room temperature

R2: resistance value at test temp.

T1: room temp. (usu. 25°C)

T2: test temp. (e.g. 75°C)

### 7.2 Temperature Cycle:

Following temp. cycles are to be made 5 times and then put at room temp. for one hour, the resistance value change rate between pre-and-post test shall be within ±1%.

Steps	Temperature(°C)	Time (minutes)
1 <sup>st</sup> step	-55 ± 3	30
2 <sup>nd</sup> step	Room temp.	3
3 <sup>rd</sup> step	200 ± 3	30
4 <sup>th</sup> step	Room temp.	3

### 7.3 Short Time Over Load:

When the resistors are applied 5 times as much as rated power for 5 seconds continuously, it shows no evidence of arc, flame...etc. Removing the voltage and place the resistors to the normal condition for 30 minutes, the resistance value change rate between pre-and-post test shall be within ±2%.

### 7.4 Insulation Character :

Resistors are located in a V-shaped metal trough. Using the DC 500V megger instrument 2 poles to clutch either side of lead wires and metal trough, measuring the Insulation Resistance which shall be over 1000MΩ.

### 7.5 Voltage Withstanding:

Resistors are located in a V-shaped metal trough. Applying suitable voltage listed on DIMENSION for one minute and should find no physical damage to the resistors, such as arc, char...etc.

### 7.6 Load Life:

The resistors arrayed are sent into the 70°C oven, applying rated voltage at the cycle of 1.5 hours ON, 0.5 hour OFF for 1000<sup>±48</sup> hours in total. Then, after removing the voltage, take the resistors out of the oven and left under normal temp. for one hour cooling. The resistance value change rate between pre-and-post test shall be within ±3%.

## FUSIBLE WIRE WOUND RESISTORS, FLAMEPROOF

---

### 7.7 Moisture-proof Load Life:

The resistors arrayed are placed into a constant temp./humidity oven at the temp. of  $40 \pm 2^\circ\text{C}$  and the humidity of 90~95%, then 1/10 DC rated power is applied for 1.5 hours and cut off for 0.5 hour. The similar cycle will be repeated for  $1000_{-0}^{+48}$  hours in total (including cut-off time). Then remove the voltage, taking the resistors out of the oven and leaving them at room temp. for one hour. The resistance value change rate between pre-and-post test shall be within  $\pm 3\%$ . There also shall be no evidence of remarkable change on appearance, and the marking shall not be illegible.

### 7.8 Solder-ability:

The leads with flux are dipped in a melted solder of  $235 \pm 5^\circ\text{C}$  for 2 seconds, more than 95% of the circumference of the lead wires shall be covered with solder.

### 7.9 Resistance to Soldering Heat:

Two leads are together dipped in a melted solder of  $270 \pm 5^\circ\text{C}$  for  $10 \pm 1$  seconds, or  $350 \pm 10^\circ\text{C}$  for  $3.5 \pm 0.5$  seconds, Then remove the resistors and leaving them at room temp. for one hour. The resistance value change rate between pre-and-post test shall be within  $\pm 1\%$ .

### 7.10 Nonflammability:

The resistors are applied the power of 16 times the rated wattage for 5 min. and shall not get flame.

### 7.11 Fusing Characteristics:

7.11.1 The resistors are applied the power of 16 times the rated wattage and shall be fusing within 60 sec.

7.11.2 The resistance value will be as high as 100 times the original value after fusing.

### 7.12 Surge Voltage Withstanding:


The resistors are designed to withstand following surge voltage,  $1.2/50\mu\text{s}$  pulse, according to IEC-61000-4-5, 10 pulses in total, 30 seconds between each pulse. The resistance value change rate between pre-and-post test shall be within  $\pm 5\%$ .

TYPE	Resistance Range	Resistance Range	Resistance Range	Resistance Range
FKN	$1\Omega \sim 10\Omega$	$11\Omega \sim 43\Omega$	$47\Omega \sim 75\Omega$	$82\Omega \sim 100\Omega$
1WS	1.2kV	1.5kV	1.7kV	2kV
2WS	1.4kV	1.7kV	1.9kV	2.2kV

## FUSIBLE WIRE WOUND RESISTORS, FLAMEPROOF

8.Others:

8.1 Taping Specifications:

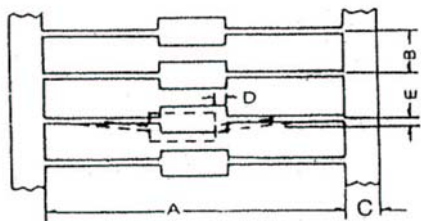

Unit : mm

FKN	Type	Size		C±1	D Max	E Max
		A	B			
1WS	T-52	52±1	5±0.5	6	0.6	1.2
2WS	T-52	52±1	5±0.5	6	0.6	1.2

8.2 Tape in Box:

			Unit : mm					
			FKN	TYPE	QTY PER BOX	a	b	c
			1WS	T-52	5,000	144	84	272
			2WS	T-52	1,000	75	55	255

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Thick Film Resistors - Through Hole](#) category:*

*Click to view products by [Tyohm](#) manufacturer:*

Other Similar products are found below :

[M8340104K3300GCD03](#) [M8340105K3300GGD03](#) [M8340105K3922FGD03](#) [M8340107K2401GCD03](#) [M8340109K1002JCD03](#)

[M8340109K1003GCD03](#) [MP850-3.00-1%](#) [ARC3.11 2M J A](#) [M8340105K1003GCD03](#) [M8340105M2201GCD03](#) [M8340107M7501GCD03](#)

[M8340108K2051FCD03](#) [M8340108K7501GCD03](#) [M8340108M5100JGD03](#) [M8340109K1000GCD03](#) [MOX-GRD-001](#)

[M8340102M4701GBD04](#) [M8340102K1002GBD04](#) [M8340109K2002GGD03](#) [M8340108K2002FGD03](#) [OE1305](#) [MS-221-82R5](#) [MOX-](#)

[750231004DE](#) [MOX-4-127505J](#) [SM102034504FE](#) [MOX300002206FE](#) [MOX-400233004F](#) [MOX300001005BE](#) [SM104066008J](#) [MOX-](#)

[400262008PE](#) [MOX-400232506FE](#) [MOX-400234007FE](#) [MOX-400221006G](#) [MOX-750235006ME](#) [SM103032506FE](#) [SM202022005FE](#)

[MOX1125231002FE](#) [MOX-1-122504F](#) [MOX-400225003F](#) [MOX1125731008FE](#) [MOX-5-126002JE](#) [MS176-2.20M-1%](#) [MOX-830212453BE](#)

[TRHE01A270RJ2E](#) [TRHE01A560RJ2E](#) [TRHP01A200RF2E](#) [TRHP01A5001F2E](#) [MG715-2.40M-1%](#) [MS214-20.0K-1%](#) [MF0W4FF4702A50](#)