




## 2SD669/A

## NPN SILICON TRANSISTOR

### BIPOLAR POWER GENERAL PURPOSE TRANSISTOR

#### APPLICATIONS

\* Low frequency power amplifier complementary pair with UTC 2SB649/A

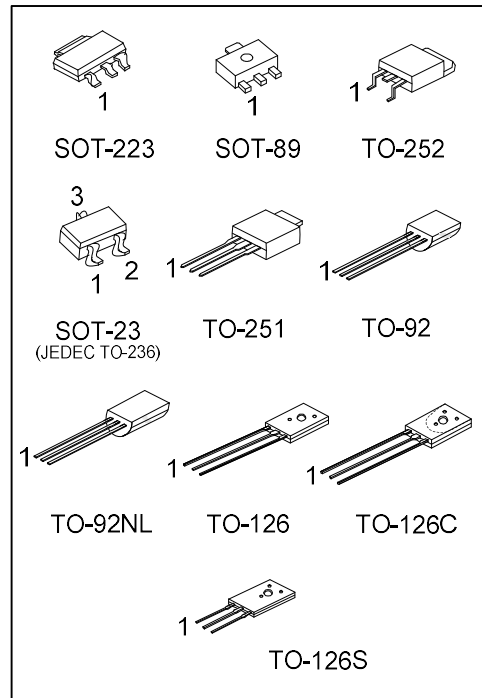

#### ORDERING INFORMATION

Ordering Number		Package	Pin Assignment			Packing
Lead Free	Halogen Free		1	2	3	
2SD669xL-x-AA3-R	2SD669xG-x-AA3-R	SOT-223	B	C	E	Tape Reel
2SD669xL-x-AB3-R	2SD669xG-x-AB3-R	SOT-89	B	C	E	Tape Reel
2SD669xL-x-AE3-R	2SD669xG-x-AE3-R	SOT-23	E	B	C	Tape Reel
2SD669xL-x-AE3-6-R	2SD669xG-x-AE3-6-R	SOT-23	B	E	C	Tape Reel
2SD669xL-x-T60-K	2SD669xG-x-T60-K	TO-126	E	C	B	Bulk
2SD669xL-x-T60-T	2SD669xG-x-T60-T	TO-126	E	C	B	Tube
2SD669xL-x-T6C-K	2SD669xG-x-T6C-K	TO-126C	E	C	B	Bulk
2SD669xL-x-T6C-T	2SD669xG-x-T6C-T	TO-126C	E	C	B	Tube
2SD669xL-x-T6S-K	2SD669xG-x-T6S-K	TO-126S	E	C	B	Bulk
2SD669xL-x-T6S-T	2SD669xG-x-T6S-T	TO-126S	E	C	B	Tube
2SD669xL-x-T92-B	2SD669xG-x-T92-B	TO-92	E	C	B	Tape Box
2SD669xL-x-T92-K	2SD669xG-x-T92-K	TO-92	E	C	B	Bulk
2SD669xL-x-T9N-B	2SD669xG-x-T9N-B	TO-92NL	E	C	B	Tape Box
2SD669xL-x-T9N-K	2SD669xG-x-T9N-K	TO-92NL	E	C	B	Bulk
2SD669xL-x-TM3-T	2SD669xG-x-TM3-T	TO-251	B	C	E	Tube
2SD669xL-x-TN3-R	2SD669xG-x-TN3-R	TO-252	B	C	E	Tape Reel

Note: Pin Assignment: B: Base C: Collector E: Emitter

<p>2SD669xG-x-AE3-6-R</p> <ul style="list-style-type: none"> <li>(1)Packing Type</li> <li>(2)Pin Assignment</li> <li>(3)Package Type</li> <li>(4)Rank</li> <li>(5)Green Package</li> <li>(6) Collector-Emitter Voltage</li> </ul>	<ul style="list-style-type: none"> <li>(1) B: Tape Box, K: Bulk, R: Tape Reel, T: Tube</li> <li>(2) refer to Pin Assignment</li> <li>(3) AA3: SOT-223, AB3: SOT-89, AE3: SOT-23 T60: TO-126, T6C: TO-126C, T6S: TO-126S TM3: TO-251, TN3: TO-252, T92: TO-92 T9N: TO-92NL</li> <li>(4) x: refer to Classification of <math>h_{FE1}</math></li> <li>(5) G: Halogen Free and Lead Free, L: Lead Free</li> <li>(6) A: 160V, Blank: 120V</li> </ul>
---	---

## MARKINL INFORMATION

PACKALE	MARKINL	
	2SD669	2SD669A
SOT-223		
SOT-89		
SOT-23		
TO-126 TO-126C TO-126S		
TO-92		
TO-92NL		
TO-251 TO-252		

■ **ABSOLUTE MAXIMUM RATINGS** ( $T_A=25^\circ\text{C}$  unless otherwise specified)

PARAMETER		SYMBOL	RATINGS	UNIT
Collector-Base Voltage		$V_{CB0}$	180	V
Collector-Emitter Voltage	2SD669	$V_{CE0}$	120	V
	2SD669A		160	
Emitter-Base Voltage		$V_{EB0}$	5	V
Collector Current		$I_C$	1.5	A
Collector Peak Current		$I_{C(PK)}$	3	A
Base Current		$I_B$	0.5	A
Power Dissipation	SOT-223/SOT-89	$P_D$	0.5	W
	SOT-23		0.35	W
	TO-126/TO-126S		1.3	W
	TO-126C		1	W
	TO-92/TO-92NL		0.6	W
	TO-251/TO-252		2	W
Junction Temperature		$T_J$	+150	$^\circ\text{C}$
Storage Temperature		$T_{STL}$	-40 ~ +150	$^\circ\text{C}$

Note Absolute maximum ratings are those values beyond which the device could be permanently damaged. Absolute maximum ratings are stress ratings only and functional device operation is not implied.

■ **HERMAL DATA**

PARAMETER		SYMBOL	RATINGS	UNIT
Junction to Case	SOT-89	$\theta_{JC}$	38	$^\circ\text{C/W}$
	SOT-223		14	
	SOT-23		110	
	TO-92/TO-92NL		80	
	TO-126/TO-126S		6.25	
	TO-126C		10	
	TO-251/TO-252		4.5	

■ **ELECTRICAL CHARACTERISTICS** ( $T_A=25^\circ\text{C}$ , unless otherwise specified)







PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
<b>OFF CHARACTERISTICS</b>						
Collector to Base Breakdown Voltage	$BV_{CBO}$	$I_C=1\text{mA}, I_E=0$	180			V
Collector to Emitter Breakdown Voltage	2SD669	$I_C=10\text{mA}, R_{BE}=\infty$	120			V
	2SD669A		160			
Collector to Emitter Breakdown Voltage ( $V_{BE}=0\text{V}$ )	2SD669	$I_C=1\text{mA}, V_{BE}=0\text{V}$	120			V
	2SD669A		160			
Emitter to Base Breakdown Voltage	$BV_{EBO}$	$I_E=1\text{mA}, I_C=0$	5			V
Collector Cut-off Current	$I_{CBO}$	$V_{CB}=160\text{V}, I_E=0$			10	$\mu\text{A}$
Emitter Cutoff Current	$I_{EBO}$	$V_{EB}=4\text{V}, I_C=0$			10	$\mu\text{A}$
<b>ON CHARACTERISTICS</b>						
DC Current Gain	$h_{FE1}$	$V_{CE}=5\text{V}, I_C=150\text{mA}$ (Note)	60		320	
	$h_{FE2}$	$V_{CE}=5\text{V}, I_C=500\text{mA}$ (Note)	30			
Collector-Emitter Saturation Voltage	$V_{CE(SAT)}$	$I_C=600\text{mA}, I_B=50\text{mA}$ (Note)			1	V
Base-Emitter Saturation Voltage	$V_{BE(SAT)}$	$I_C=600\text{mA}, I_B=50\text{mA}$ (Note)			1.2	V
Base-Emitter Voltage	$V_{BE}$	$V_{CE}=5\text{V}, I_C=150\text{mA}$ (Note)			1.5	V
<b>DYNAMIC CHARACTERISTICS</b>						
Current Gain Bandwidth Product	$f_T$	$V_{CE}=5\text{V}, I_C=150\text{mA}$ (Note)		140		MHz
Output Capacitance	$C_{ob}$	$V_{CB}=10\text{V}, I_E=0, f=1\text{MHz}$		14		pF
<b>SWITCHING CHARACTERISTICS</b>						
Rise time	$t_R$	$V_{CC}=50\text{V}, I_C=0.5\text{A}, I_{B1}=I_{B2}=10\text{mA}, t_p=25\mu\text{s}, \text{Duty Cycle}\leq 1\%$		0.5		$\mu\text{s}$
Storage time	$t_S$			1.5		$\mu\text{s}$
Fall Time	$t_F$			0.7		$\mu\text{s}$

Note: Pulse test.

■ **CLASSIFICATION OF  $h_{FE1}$**

RANK	B	C	D
RANLE	60-120	100-200	160-320

## TYPICAL CHARACTERISTICS

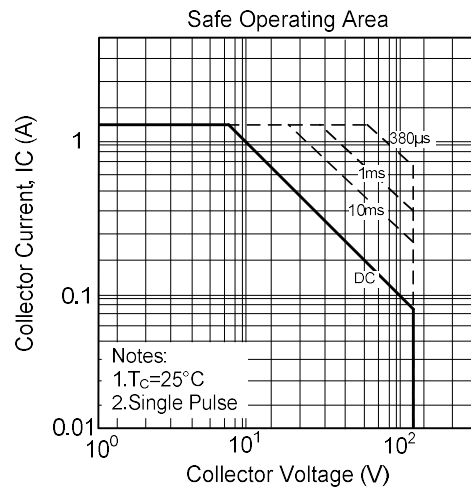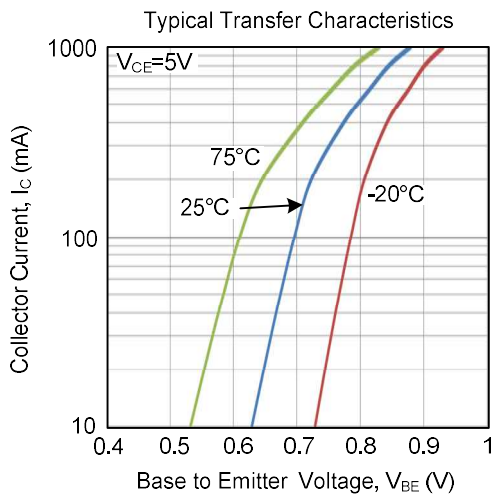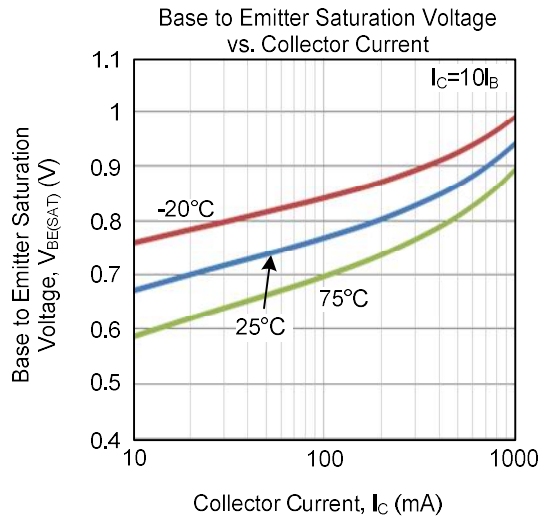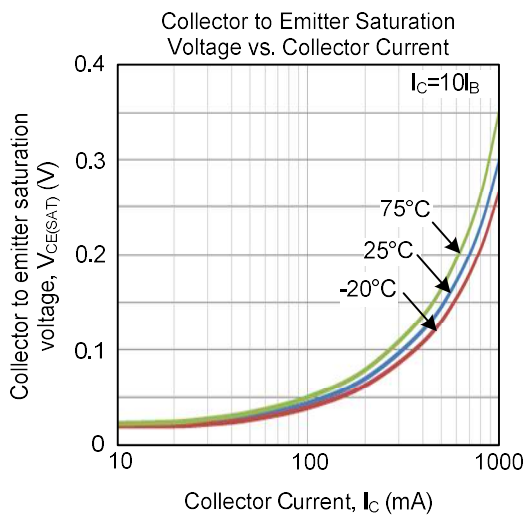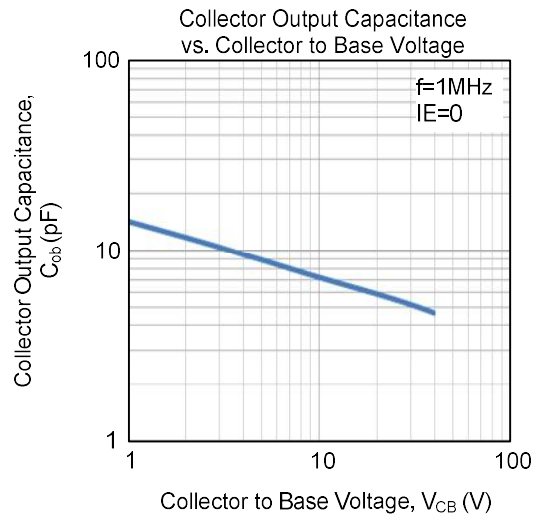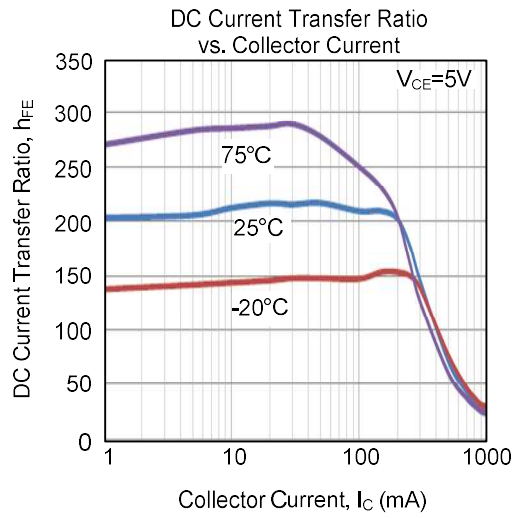

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. UTC reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Bipolar Transistors - BJT category](#):*

*Click to view products by [Unisonic manufacturer](#):*

Other Similar products are found below :

[BC559C](#) [MCH4017-TL-H](#) [MMBT-2369-TR](#) [BC546/116](#) [NJVMJD148T4G](#) [NTE16](#) [NTE195A](#) [IMX9T110](#) [2N4401-A](#) [2N6728](#) [2SA1419T-TD-H](#) [2SB1204S-TL-E](#) [2SC5488A-TL-H](#) [FMC5AT148](#) [2N2369ADCSM](#) [2N2907A](#) [2N3904-NS](#) [2N5769](#) [2SC4618TLN](#) [CPH6501-TL-E](#) [US6T6TR](#) [BAX18/A52R](#) [BC556/112](#) [IMZ2AT108](#) [MMST8098T146](#) [MCH6102-TL-E](#) [BC846B-13-F](#) [2N3879](#) [30A02MH-TL-E](#) [NTE13](#) [NTE282](#) [NTE323](#) [NTE350](#) [NTE81](#) [JANTX2N2920L](#) [JANSR2N2907AUB](#) [CMLT3946EG TR](#) [SNSS40600CF8T1G](#) [CMLT3906EG TR](#) [GRP-DATA-JANS2N2907AUB](#) [GRP-DATA-JANS2N2222AUA](#) [MMDT3946FL3-7](#) [2N4240](#) [JANS2N3019](#) [MSB30KH-13](#) [2N2221AUB](#) [2SD1815T-TL-E](#) [2N6678](#) [2N2907Ae4](#) [JAN2N3507](#)