



2SD965/A

NPN SILICON TRANSISTOR


LOW VOLTAGE HIGH CURRENT TRANSISTOR

FEATURES

- * Collector current up to 5A
- * UTC **2SD965**: Collector-Emitter voltage up to 20 V
- * UTC **2SD965A**: Collector-Emitter voltage up to 30 V

APPLICATIONS

- * Audio amplifier
- * Flash unit of camera
- * Switching circuit

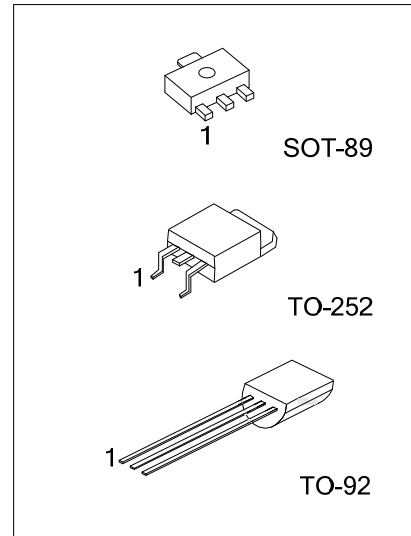

ORDERING INFORMATION

Ordering Number		Package	Pin Assignment			Packing
Lead Free	Halogen Free		1	2	3	
-	2SD965G-x-AB3-R	SOT-89	B	C	E	Tape Reel
2SD965L-x-T92-B	2SD965G-x-T92-B	TO-92	E	C	B	Tape Box
2SD965L-x-T92-K	2SD965G-x-T92-K	TO-92	E	C	B	Bulk
2SD965L-x-TN3-R	2SD965G-x-TN3-R	TO-252	B	C	E	Tape Reel
-	2SD965AG-x-AB3-R	SOT-89	B	C	E	Tape Reel
2SD965AL-x-T92-B	2SD965AG-x-T92-B	TO-92	E	C	B	Tape Box
2SD965AL-x-T92-K	2SD965AG-x-T92-K	TO-92	E	C	B	Bulk
2SD965AL-x-TN3-R	2SD965AG-x-TN3-R	TO-252	B	C	E	Tape Reel

Note: Pin Assignment: C: Collector B: Base E: Emitter

<p>2SD965G-x-AB3-R</p> <p>(1) Packing Type (2) Package Type (3) Rank (4) Green Package</p>	<p>(1) R: Tape Reel, B: Tape Box, K: Bulk (2) AB3: SOT-89, T92: TO-92, TN3: TO-252 (3) x: refer to Classification of h_{FE2} (4) G: Halogen Free and Lead Free, L: Lead Free</p>
--	---

MARKING

PACKAGE	MARKING	
	2SD965	2SD965A
SOT-89		
TO-252		
TO-92		

■ ABSOLUTE MAXIMUM RATING (T_A=25°C)

PARAMETER	SYMBOL	RATINGS	UNIT
Collector-Base Voltage	V _{CBO}	40	V
Collector-Emitter Voltage	V _{CEO}	20	V
		30	V
Emitter-Base Voltage	V _{EBO}	7	V
Collector Dissipation	P _C	500	mW
		750	mW
		1	W
Collector Current	I _C	5	A
Junction Temperature	T _J	150	°C
Storage Temperature	T _{STG}	-65 ~ +150	°C

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged. Absolute maximum ratings are stress ratings only and functional device operation is not implied.

■ ELECTRICAL CHARACTERISTICS (T_A=25°C, unless otherwise specified)


PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Collector-Base Breakdown Voltage	BV _{CBO}	I _C =100μA, I _E =0	40			V
Collector-Emitter Breakdown Voltage	BV _{CEO}	I _C =1mA, I _B =0	20			V
			30			V
Emitter-Base Breakdown Voltage	BV _{EBO}	I _E =10μA, I _C =0	7			V
Collector Cut-off Current	I _{CBO}	V _{CB} =10V, I _E =0			100	nA
Emitter Cut-off Current	I _{EBO}	V _{EB} =7V, I _C =0			100	nA
DC Current Gain	h _{FE1}	V _{CE} =2V, I _C =1mA		200		
	h _{FE2}	V _{CE} =2V, I _C =0.5A	230		800	
	h _{FE3}	V _{CE} =2V, I _C =2A	150			
Collector-Emitter Saturation Voltage	V _{CE(SAT)}	I _C =3A, I _B =0.1A			1	V
Current Gain Bandwidth Product	f _T	V _{CE} =6V, I _C =50mA		150		MHz
Output Capacitance	C _{ob}	V _{CB} =20V, I _E =0, f=1MHz			50	pF

■ CLASSIFICATION OF h_{FE2}


RANK	Q	R	S
RANGE	230-380	340-600	560-800

TYPICAL CHARACTERISTICS


Static Characteristics

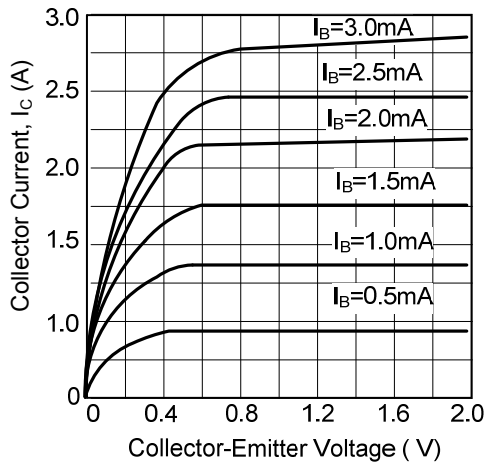


DC Current Gain

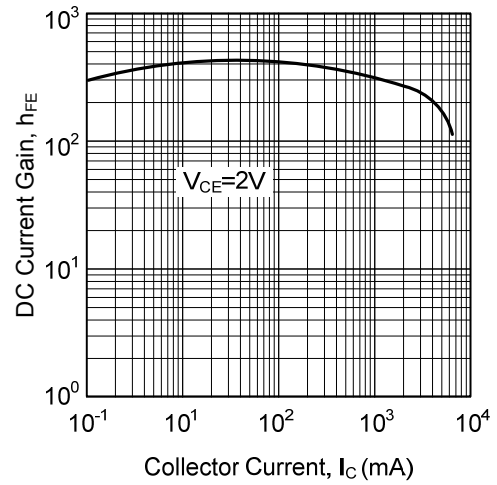


Base-Emitter on Voltage

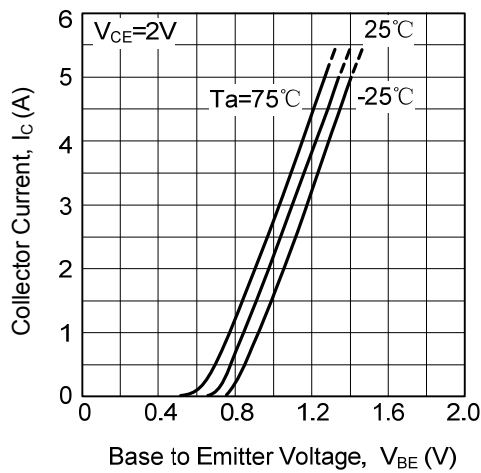


Saturation Voltage

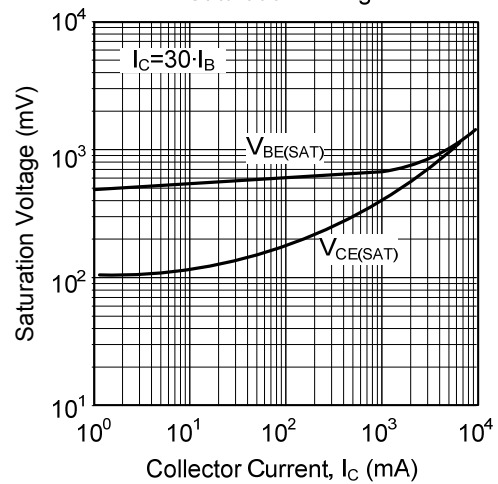



Current Gain-Bandwidth Product

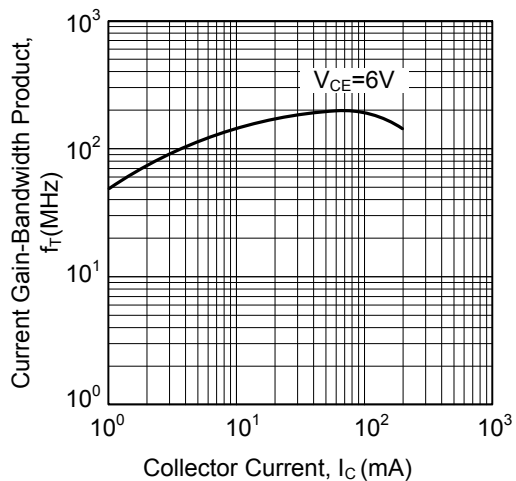

Collector Output Capacitance

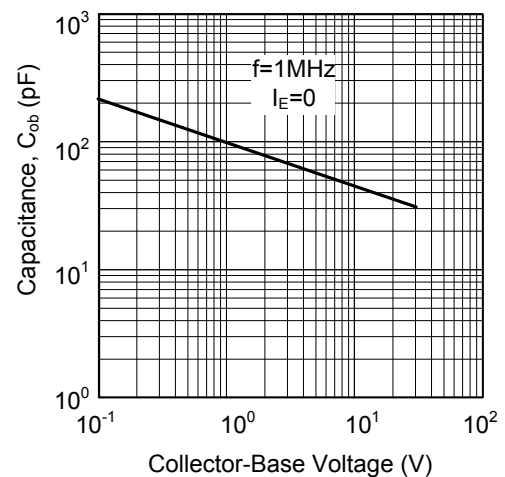

TYPICAL CHARACTERISTICS

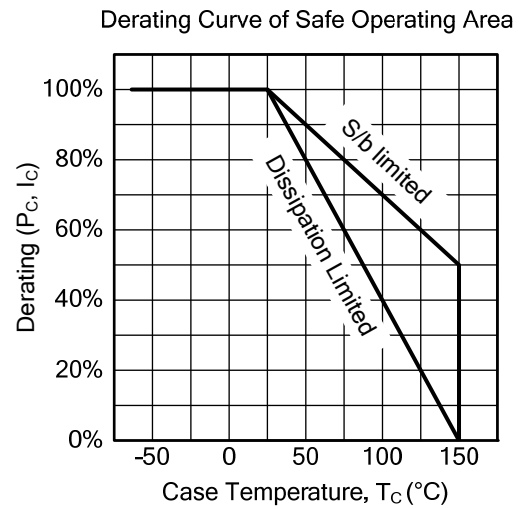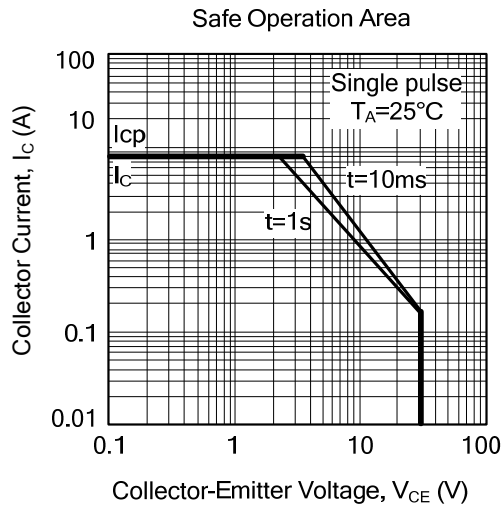

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Bipolar Transistors - BJT category](#):

Click to view products by [Unisonic manufacturer](#):

Other Similar products are found below :

[BC559C](#) [MCH4017-TL-H](#) [MMBT-2369-TR](#) [BC546/116](#) [NJVMJD148T4G](#) [NTE16](#) [NTE195A](#) [IMX9T110](#) [2N4401-A](#) [2N4403](#) [2N6728](#)
[2SA1419T-TD-H](#) [2SA2126-E](#) [2SB1204S-TL-E](#) [FMC5AT148](#) [2N2369ADCSM](#) [2N2907A](#) [2N3904-NS](#) [2N5769](#) [2SC4618TLN](#) [CPH6501-](#)
[TL-E](#) [MCH4021-TL-E](#) [Jantx2N5416](#) [US6T6TR](#) [BAX18/A52R](#) [BC556/112](#) [IMZ2AT108](#) [MMST8098T146](#) [UMX21NTR](#) [MCH6102-TL-E](#)
[TTA1452B,S4X\(S](#) [2N3879](#) [NTE13](#) [NTE282](#) [NTE323](#) [NTE350](#) [NTE81](#) [JANTX2N2920L](#) [JANTX2N3735](#) [JANSR2N2222AUB](#)
[CMLT3946EG TR](#) [SNSS40600CF8T1G](#) [CMLT3906EG TR](#) [GRP-DATA-JANS2N2907AUB](#) [GRP-DATA-JANS2N2222AUA](#)
[MMDT3946FL3-7](#) [2N4240](#) [MSB30KH-13](#) [2N2221AUB](#) [2SD1815T-TL-E](#)