



ELECTRONIC EQUIPMENT FILM CAPACITOR

DADC Series



- It is excellent in coping with high current and in heat radiation.
- It can handle a frequency of above 100kHz.
- The amor is a powder molded flame resisting epoxy resin (correspond V-0).

◆SPECIFICATIONS

Items	Characteristics			
Category temperature range	-40 to +105°C			
Rated voltage range	250 to 630Vdc			
Capacitance tolerance	±5% (J)			
Voltage proof (Terminal - Terminal)	No degradation, at 150% of rated voltage shall be applied for 60 seconds.			
Dissipation factor (tanδ)	No more than 0.05%			
Insulation resistance (Terminal - Terminal)	No less than 50000MΩ : Equal or less than 1μF.			
	No less than 50000ΩF : More than 1μF.			
	Rated voltage (V _{dc})	250	400	630
	Measurement voltage (V _{dc})	100	100	500
Endurance	The following specifications shall be satisfied, after 1000hrs with applying rated voltage×125% at 85°C.			
	Appearance	No serious degradation		
	Insulation resistance (Terminal - Terminal)	No less than 25000MΩ : Equal or less than 1μF.		
		No less than 25000ΩF : More than 1μF.		
	Dissipation factor (tanδ)	No more than initial specification at 1kHz.		
Capacitance change	Within ±3% of initial value.			
Loading under damp heat	The following specifications shall be satisfied, after 500hrs with applying rated voltage at 40°C 90~95%RH.			
	Appearance	No serious degradation.		
	Insulation resistance (Terminal - Terminal)	No less than 25000MΩ : Equal or less than 1μF.		
		No less than 25000ΩF : More than 1μF.		
	Dissipation factor (tanδ)	No more than initial specification at 1kHz.		
Capacitance change	Within ±5% of initial value.			

◆STANDARD RATINGS

WV (Vdc)	Cap (μF)	Dimensions (mm)					Maximum ripple current (Arms)	WV (Vac)	Part Number	Previous Part Number (Just for your reference)
		W	H	T	F	φd				
250	0.01	15.5	11.0	7.0	7.5	0.8	0.78	125	FDADC251V103JGLBM0	DADC2E103J-F2BM
	0.012		11.5	7.5			1.0		FDADC251V123JGLBM0	DADC2E123J-F2BM
	0.015		13.0	8.5			1.2		FDADC251V153JGLBM0	DADC2E153J-F2BM
	0.018		11.5	7.5			1.4		FDADC251V183JGLBM0	DADC2E183J-F2BM
	0.022		12.0	6.0			1.7		FDADC251V223JGLBM0	DADC2E223J-F2BM
	0.027		12.5	6.5			1.9		FDADC251V273JGLBM0	DADC2E273J-F2BM
	0.033		13.0	7.0			2.2		FDADC251V333JGLBM0	DADC2E333J-F2BM
	0.039		13.0	7.5			2.4		FDADC251V393JGLBM0	DADC2E393J-F2BM
	0.047		15.5	7.5			2.6		FDADC251V473JGLBM0	DADC2E473J-F2BM
	0.056		15.5	7.5			2.8		FDADC251V563JGLBM0	DADC2E563J-F2BM
	0.068		12.0	6.5			2.9		FDADC251V683JGLBM0	DADC2E683J-F2BM
	0.082		12.5	7.0			3.0		FDADC251V823JGLBM0	DADC2E823J-F2BM
	0.1		12.0	6.5			3.1		FDADC251V104JDLBM0	DADC2E104J-F2BM
	0.12		12.5	7.0			3.3		FDADC251V124JDLBM0	DADC2E124J-F2BM
	0.15		14.0	7.0			3.4		FDADC251V154JDLBM0	DADC2E154J-F2BM
	0.18		14.5	7.5			3.6		FDADC251V184JDLBM0	DADC2E184J-F2BM
	0.22	15.5	7.5	3.7	FDADC251V224JDLBM0	DADC2E224J-F2BM				
	0.27	16.0	8.0	3.8	FDADC251V274JDLBM0	DADC2E274J-F2BM				
	0.33	16.5	8.5	4.0	FDADC251V334JDLBM0	DADC2E334J-F2BM				
	0.39	17.5	9.0	4.1	FDADC251V394JDLBM0	DADC2E394J-F2BM				
	0.47	16.5	8.0	4.3	FDADC251V474JNLBM0	DADC2E474J-F2BM				
	0.56	17.0	8.5	4.6	FDADC251V564JNLBM0	DADC2E564J-F2BM				
	0.68	17.5	9.0	5.0	FDADC251V684JNLBM0	DADC2E684J-F2BM				
	0.82	18.0	10.0	5.3	FDADC251V824JNLBM0	DADC2E824J-F2BM				
	1.0	19.0	10.5	5.7	FDADC251V105JNLBM0	DADC2E105J-F2BM				
	1.2	20.0	11.5	6.2	FDADC251V125JNLBM0	DADC2E125J-F2BM				
	1.5	21.0	12.5	6.7	FDADC251V155JNLBM0	DADC2E155J-F2BM				
	1.8	22.0	14.0	7.2	FDADC251V185JNLBM0	DADC2E185J-F2BM				
	2.2	23.5	15.0	7.8	FDADC251V225JNLBM0	DADC2E225J-F2BM				
	2.7	24.0	15.5	8.2	FDADC251V275JELBM0	DADC2E275J-F2BM				
	3.3	24.5	16.5	8.7	FDADC251V335JELBM0	DADC2E335J-F2BM				
	3.9	25.5	17.5	9.1	FDADC251V395JFLEM0	DADC2E395J-F2EM				
4.7	27.0	19.0	9.3	FDADC251V475JFLEM0	DADC2E475J-F2EM					

- (1)The maximum ripple current : +85°C max., 100kHz, sine wave
- (2)WV(Vac) : 50Hz or 60Hz, sine wave


◆STANDARD RATINGS

WV (Vdc)	Cap (μF)	Dimensions (mm)					Maximum ripple current (Arms)	WV (Vac)	Part Number	Previous Part Number (Just for your reference)	
		W	H	T	F	φd					
400	0.01	15.5	11.0	7.0	7.5	0.8	1.5	250	FDADC401V103JGLBM0	DADC2G103J-F2BM	
	0.012		11.5	7.5			1.7		FDADC401V123JGLBM0	DADC2G123J-F2BM	
	0.015		13.0	8.5			1.9		FDADC401V153JGLBM0	DADC2G153J-F2BM	
	0.018		11.5	7.5			2.0		FDADC401V183JGLBM0	DADC2G183J-F2BM	
	0.022		12.0	6.0			2.2		FDADC401V223JGLBM0	DADC2G223J-F2BM	
	0.027		12.5	6.5			2.4		FDADC401V273JGLBM0	DADC2G273J-F2BM	
	0.033		13.0	7.0			2.6		FDADC401V333JGLBM0	DADC2G333J-F2BM	
	0.039		13.0	6.0			2.7		FDADC401V393JGLBM0	DADC2G393J-F2BM	
	0.047		13.5	6.5			2.9		FDADC401V473JGLBM0	DADC2G473J-F2BM	
	0.056		14.0	6.5			3.1		FDADC401V563JGLBM0	DADC2G563J-F2BM	
	0.068	17.5	13.5	6.5	3.2	FDADC401V683JDLBM0	DADC2G683J-F2BM				
	0.082		14.0	7.0	3.4	FDADC401V823JDLBM0	DADC2G823J-F2BM				
	0.1		14.5	7.5	3.6	FDADC401V104JDLBM0	DADC2G104J-F2BM				
	0.12		15.0	8.0	3.9	FDADC401V124JDLBM0	DADC2G124J-F2BM				
	0.15		16.0	8.5	4.3	FDADC401V154JDLBM0	DADC2G154J-F2BM				
	0.18		16.5	9.5	4.6	FDADC401V184JDLBM0	DADC2G184J-F2BM				
	0.22		16.0	9.0	4.9	FDADC401V224JHLBM0	DADC2G224J-F2BM				
	0.27		18.0	9.5	5.3	FDADC401V274JHLBM0	DADC2G274J-F2BM				
	0.33		20.5	19.0	10.5	5.6	FDADC401V334JHLBM0		DADC2G334J-F2BM		
	0.39			19.5	11.5	5.9	FDADC401V394JHLBM0		DADC2G394J-F2BM		
	0.47	20.0		11.5	6.3	FDADC401V474JNLBM0	DADC2G474J-F2BM				
	0.56	21.0		13.0	6.6	FDADC401V564JNLBM0	DADC2G564J-F2BM				
	0.68	21.0		13.0	6.9	FDADC401V684JELBM0	DADC2G684J-F2BM				
	0.82	22.5		14.0	7.2	FDADC401V824JELBM0	DADC2G824J-F2BM				
	1.0	25.5		23.5	15.5	7.5	FDADC401V105JELBM0		DADC2G105J-F2BM		
	1.2			25.0	16.5	8.0	FDADC401V125JELBM0		DADC2G125J-F2BM		
	1.5			26.5	18.5	8.5	FDADC401V155JELBM0		DADC2G155J-F2BM		
	1.8			26.0	17.5	8.9	FDADC401V185JFLEM0		DADC2G185J-F2EM		
2.2	27.5		19.5	9.3	FDADC401V225JFLEM0	DADC2G225J-F2EM					
630	0.01		15.5	11.0	7.0	7.5	0.8	1.8	300	FDADC631V103JGLBM0	DADC2J103J-F2BM
	0.012			11.5	7.5			2.0		FDADC631V123JGLBM0	DADC2J123J-F2BM
	0.015			13.0	8.5			2.1		FDADC631V153JGLBM0	DADC2J153J-F2BM
	0.018			11.5	7.5			2.2		FDADC631V183JGLBM0	DADC2J183J-F2BM
	0.022			12.5	7.0			2.3		FDADC631V223JGLBM0	DADC2J223J-F2BM
	0.027	12.5		7.0	2.5			FDADC631V273JGLBM0		DADC2J273J-F2BM	
	0.033	13.0		7.5	2.6			FDADC631V333JGLBM0		DADC2J333J-F2BM	
	0.039	12.5		7.0	2.7			FDADC631V393JHLBM0		DADC2J393J-F2BM	
	0.047	12.5		7.0	2.8			FDADC631V473JHLBM0		DADC2J473J-F2BM	
	0.056	13.0		7.5	3.1			FDADC631V563JHLBM0		DADC2J563J-F2BM	
	0.068	20.5	13.5	8.0	3.4	FDADC631V683JHLBM0	DADC2J683J-F2BM				
	0.082		14.0	8.5	3.6	FDADC631V823JHLBM0	DADC2J823J-F2BM				
	0.1		16.0	8.5	3.9	FDADC631V104JHLBM0	DADC2J104J-F2BM				
	0.12		16.5	9.5	4.3	FDADC631V124JHLBM0	DADC2J124J-F2BM				
	0.15		17.5	10.5	4.7	FDADC631V154JHLBM0	DADC2J154J-F2BM				
	0.18		18.5	11.0	5.1	FDADC631V184JHLBM0	DADC2J184J-F2BM				
	0.22		21.0	11.5	5.5	FDADC631V224JHLBM0	DADC2J224J-F2BM				
	0.27		22.5	13.0	5.9	FDADC631V274JHLBM0	DADC2J274J-F2BM				
	0.33		29.0	18.5	11.5	6.3	FDADC631V334JPLNM0	DADC2J334J-F2NM			
	0.39			19.5	12.5	6.7	FDADC631V394JPLNM0	DADC2J394J-F2NM			
	0.47	20.5		13.5	7.2	FDADC631V474JPLNM0	DADC2J474J-F2NM				
	0.56	22.5		14.0	7.6	FDADC631V564JPLNM0	DADC2J564J-F2NM				
	0.68	23.5		15.0	8.1	FDADC631V684JPLNM0	DADC2J684J-F2NM				
	0.82	23.0		14.5	8.6	FDADC631V824JRLPM0	DADC2J824J-F2PM				
	1.0	36.0		24.0	15.5	9.1	FDADC631V105JRLPM0	DADC2J105J-F2PM			
	1.2			25.5	17.0	9.3	FDADC631V125JRLPM0	DADC2J125J-F2PM			

(1)The maximum ripple current : +85°C max., 100kHz, sine wave

(2)WV(Vac) : 50Hz or 60Hz, sine wave

◆DIMENSIONS (mm)

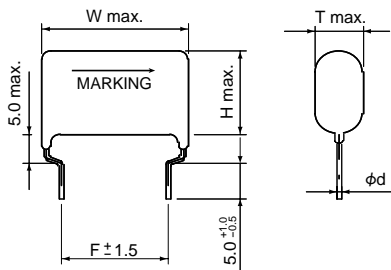

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Film Capacitors](#) category:

Click to view products by [United Chemicon](#) manufacturer:

Other Similar products are found below :

[F450KG153J250ALH0J](#) [750-1018](#) [FKP1-1000160010P15](#) [FKP1-1500160010P15](#) [82EC1100DQ50K](#) [MMWAF150KME](#)
[PFR5101J100J11L16.5TA18](#) [PME261JB5220KR19T0](#) [A521HH333M035C](#) [QXJ2E474KTPT](#) [QXL2B333KTPT](#) [QXM2G104K](#) [DMT2P22](#)
[EEC2G505HQA406](#) [B32520C6332K000](#) [B32522C6104K000](#) [B32523Q3155J](#) [B32676E6755K](#) [C3B2AD44400B20K](#) [217-0716-001](#) [KP1830-](#)
[247/061-G](#) [SCD105K122A3-22](#) [2N3155](#) [F601BL225K063CL60A](#) [FKP1-2202KV5P15](#) [FKS3-680040010P10](#) [445450-1](#) [B32523Q0475K000](#)
[46KR415050M1K](#) [4BSNBX4100ZBFJ](#) [4DCNAQ4450ZA0J](#) [MKP383510063JKP2T0](#) [MKT 1813-368-015](#) [MKT182022263473](#) [WMC08P22](#)
[WMF1S15](#) [WMF4S68](#) [EEC2E106HQA405](#) [EEC2G805HQA415](#) [82DC3100DQ50J](#) [82DC4100AA60K](#) [82EC2150DQ50K](#) [WMF4D68](#)
[WMF1D68](#) [PHE841ED6150MR17T0](#) [B25620B118K883](#) [B25620B158K883](#) [66MD2100CK7AK](#) [97F8038](#) [NRM-S225K250F](#)