


1. 额定电压	DC 48V/AC 125V	6. 自由位置 (FP)	7. $30 \pm 0.20\text{mm}$
2. 额定电流	0.1A	7. 动作位置 (OP)	6. $95 \pm 0.20\text{mm}$
3. 绝缘电阻 (IR)	50兆欧 (Min)	8. 机械寿命	1,000,000次
4. 接触电阻 (CR)	100毫欧 (Max)	9. 电气寿命	1,000,000次
5. 操作力 (OF)	$70 \pm 15\text{gf}$	10. 耐压 (WV)	AC250V 1分钟

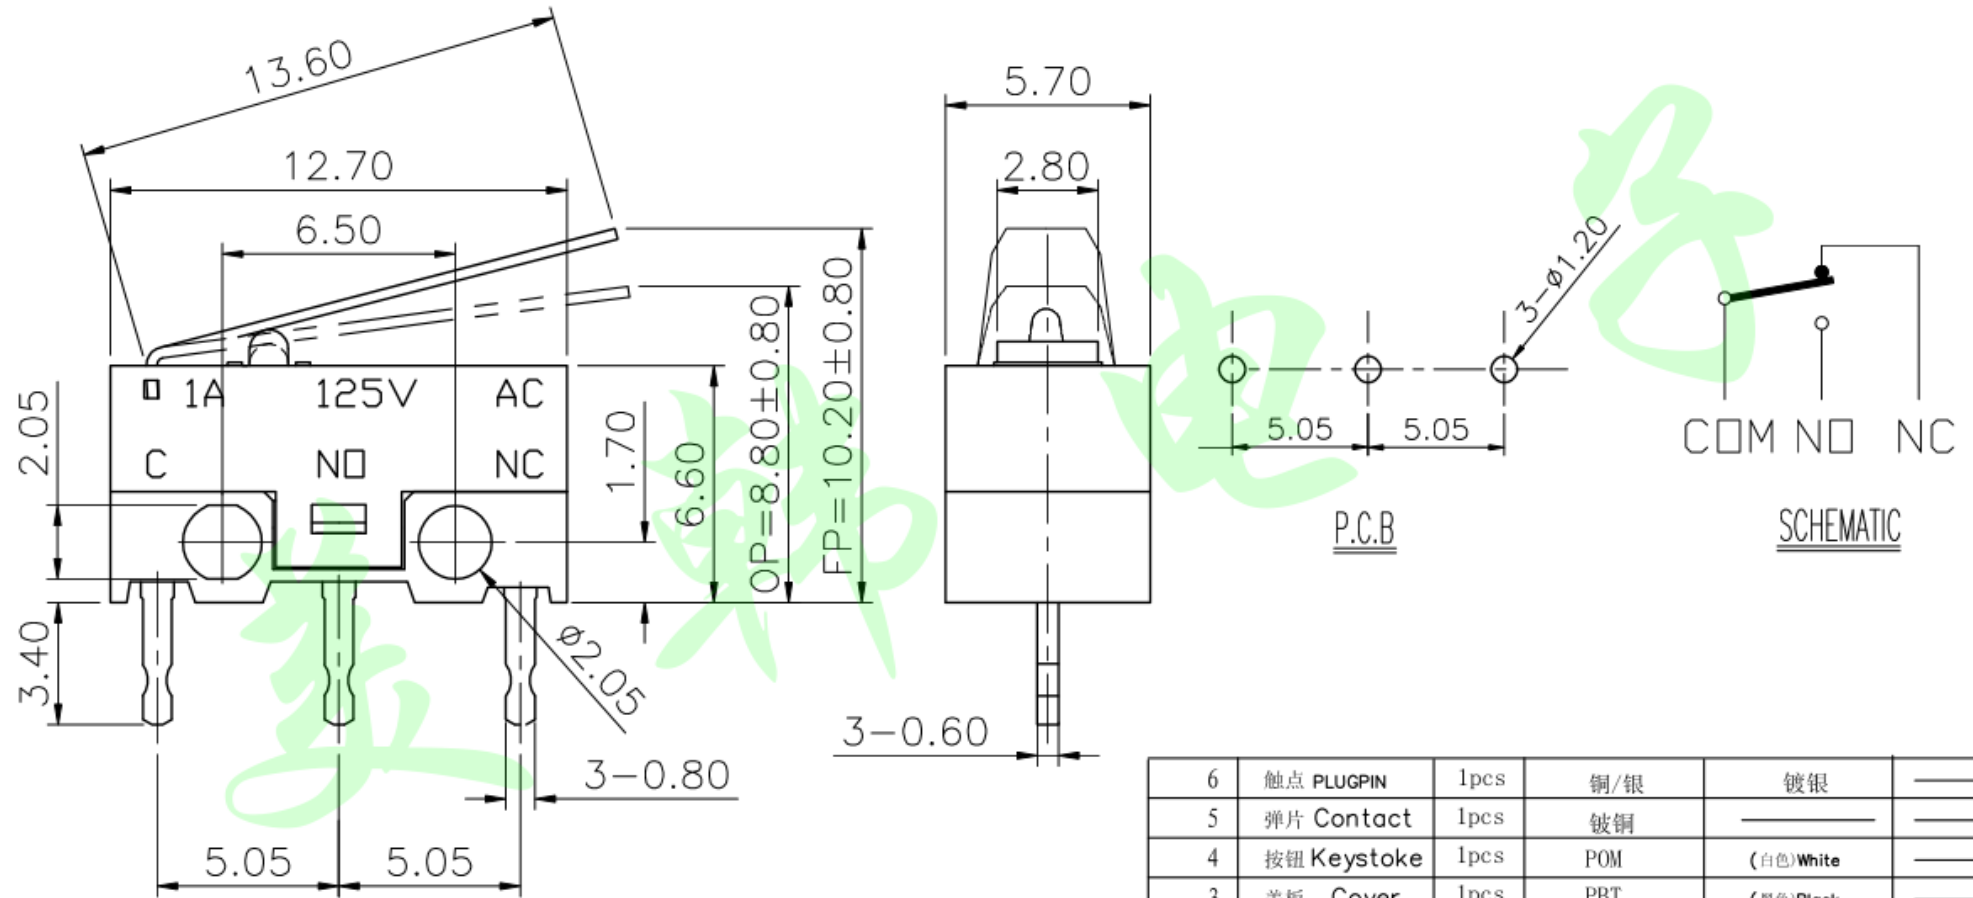

6	触点 PLUGPIN	1pcs	铜/银	镀银	——
5	弹片 Contact	1pcs	镀铜	——	——
4	按钮 Keystoke	1pcs	POM	(白色)White	——
3	盖板 Cover	1pcs	PBT	(黑色)Black	——
2	底座 Base	1pcs	PBT	白色)White	——
1	端子 Terminal	1pcs	(黄铜)Brass	(镀银)Plating Silver	——
序号 ITEM	零件 PART NAME	用量 QTY.	材质 MATERIAL	电镀/颜色 FINISHING	备注 REMARK

产品结构表 (BOM)

0~3	±0.05	±0.10	±0.20
>3~6	±0.05	±0.10	±0.30
>6~30	±0.10	±0.20	±0.50
>30~120	±0.15	±0.30	±0.80
未注尺寸公差 (mm)			



设计 Jack Jin	图面 单位 MM	A4	东莞市美韩电子科技有限公司 Dongguan Usakro Electronic Technology Co., Ltd.		
审核 Jacky Zhong	比例 重量		1:1	DWG NO.	型号: UK-E0516
批准 Tony Meng	页码 版次	1/1 A/0	1 of 1	PART NO.	规格: 12.7*5.7 微动开关
					SIZE A4
					VER R

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Basic / Snap Action Switches](#) category:*

*Click to view products by [USAKRO](#) manufacturer:*

Other Similar products are found below :

[83228001](#) [01.098.1358.1](#) [602EN1-6B](#) [602EN532](#) [602EN535-RB](#) [602HE5-RB1](#) [604HE162](#) [604HE223-6B](#) [624HE17-RB](#) [6HM89](#) [6PA78-JM](#)  
[6SE1](#) [6SX1-H58](#) [70500840](#) [MBD5B1](#) [MBH2731](#) [73-316-0012](#) [79211759](#) [79211923](#) [79218589](#) [7AS12](#) [ML-1155](#) [ML-1376](#) [831010C3.0](#)  
[831060C3.TL](#) [831090C2.EL](#) [83131904](#) [84212012](#) [8AS239](#) [8HM73-3](#) [903VB1-PG](#) [914CE1-6G](#) [PL-100](#) [11SM1077-H4](#) [11SM1077-H58](#)  
[11SM1-TN107](#) [11SM405](#) [11SM703-T](#) [11SM8423-H2](#) [11SX37-T](#) [11SX48-H58](#) [11SX55-H58](#) [11SM2442-T](#) [11SM76-T](#) [11SM77-H58](#)  
[11SM77-T](#) [11SM863-T](#) [11SM866](#) [11SX47-H58](#) [A7CN-1M-1-LEFT](#)