


USR5638 56K* V.92 PCI EXPRESS FAXMODEM

ANALOG

USRobotics now offers another form factor for internal modems, PCI Express. The USRobotics 56K* PCI Express Faxmodem (PCIe 1.1) is a single lane (x1) express card with both full height and low profile brackets and will fit into any available PCI Express slot. It is also broadly compatible with Windows including 64 bit and server systems, using the CPU of the host computer for high compression throughput due to direct parallel access. The PCI Express Faxmodem is fully compatible with V.92 and lower rates, making it ideal for compact POS solutions that only require V.34.

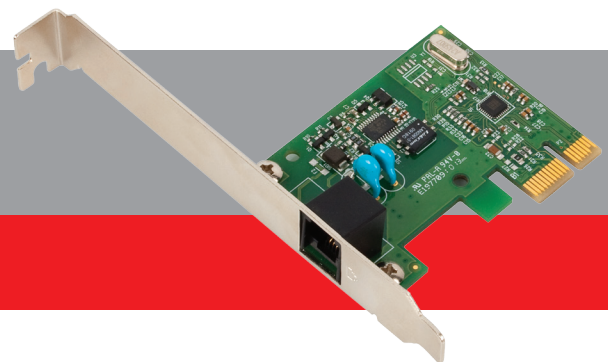

Simple, affordable PCIe to fit any PCI Express slot

PCI Express

- Supports PCI-Express revision 1.1 standard
- Single lane card fits any PCI Express slot, with any lane size
- Full height and low profile PCI brackets included

Advanced features and functionality

- Send and receive faxes through your computer while running other applications
- Permanently store preferred modem default settings
- Wake-on-ring and Caller ID support†

Get the speed you need

- Quick Connect (V.92) reduces the time it takes to establish your dial-up Internet connection
- V.92 lets you send attachments up to 50% faster

Simple three-step installation

- Your USRobotics modem is so easy to install and use, you'll be up and running in no time! Our Quick Installation Guide makes installation as easy as 1-2-3.


Excellent Compatibility

- Compatible with most recent Windows Operating Systems including Server 2016, Server 2012 and Win 10.
- Compatible with Windows Embedded POSReady 2009
- Common driver across multiple Operating Systems


Global Approvals

- US and European regulatory approvals
- Qualified for additional worldwide regulatory approvals, license fee for full approval





Model 5638
56K PCI Express Faxmodem

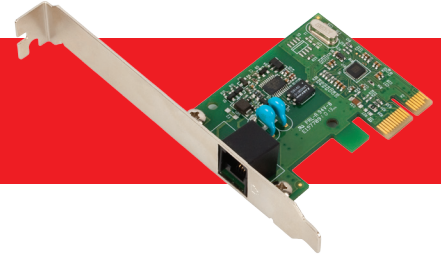

MODEL USR5638 56K* V.92 PCI EXPRESS FAXMODEM

SPECIFICATIONS & STANDARDS

GENERAL

- Data: V.92, V.90, V.34, V.32bis, V.32
- Data Error Control/Compression: V.44/V.42/V.42bis and MNP5
- Fax: EIA 578 (Class 1) with V.17, V.29, V.27ter, V.21, Group 3
- V.80 video conferencing support
- Hayes Compatible

PHYSICAL

- Phone line interface: One RJ-11 socket
- Caller ID support (requires service from your local phone company; Caller ID may not be supported in some countries)†

ENVIRONMENTAL

- Temperature:
 - Operating Temperature conditions: 0 to 50 degrees C
 - Non-Operating Temperature conditions: -20 to 70 degrees C
- Humidity: Operating Humidity conditions:
 - 20% to 80% non-condensing
 - Non-Operating Humidity conditions: 5% to 95% non-condensing

POWER CONSUMPTION

- Power 3.3V
- Signal LVDS

REGULATORY

- FCC approved
- IC approved
- UL/CUL listed
- TBR-21

PACKAGE DIMENSIONS/WEIGHT

- 6.75 x 5.38 x 1.18 in (17.15 x 13.60 x 3.0 cm)
- .34 lb / .15 kg

PRODUCT DIMENSIONS

- 2.75 x 2 x .5 in (6.98 x 5.08 x 1.27 cm)
- .08 lb (.03 kg)

MINIMUM SYSTEM REQUIREMENTS

- Windows® Server 2016/Win 10/Server 2012 R2/Server 2012/Win 8/ Server 2011/ Win 7/ Server 2008/ Vista™/ Server 2003/ POSReady/XP/2000 32 and 64 bit operating systems (Unimodem TSP/TAPI compliant)
- Available PCI Express slot: full height or low profile
- 2x or better CD-ROM drive
- Analog phone line

PACKAGE CONTENTS

- USRobotics 56K* PCI Express Modem with full height PCI bracket
- Low profile bracket
- Phone cord
- Quick Installation Guide
- Installation Essentials CD-ROM: drivers for Windows, Command Reference

WARRANTY

- 2-year limited manufacturer warranty from date of purchase

* Capable of receiving at up to 56 Kbps and sending at up to 48 Kbps (or 31.2 Kbps with V.90 server). Due to FCC regulations on power output, receiving speeds are limited to 53.3 Kbps. Actual speeds may vary. V.92 and V.90 features require compatible phone service and support from your Internet Service Provider (ISP). USRobotics modems featuring V.92 enhancements are backward compatible and will negotiate the highest possible speed when connecting to an ISP.

† Call Waiting/ Caller ID service required for utilizing Caller ID capability.

For connection to the Public Switched Telephone Network (PSTN)

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Ethernet Modules](#) category:

Click to view products by [US Robotics](#) manufacturer:

Other Similar products are found below :

[1026937](#) [1026932](#) [M38510/00302BCA](#) [70001610](#) [70001634](#) [850-15633](#) [PD-AS-951/12-24](#) [GX-OC1601](#) [1402407](#) [I210T1](#) [I350T4V2](#)
[SBL2EX](#) [SL170115](#) [GX-OD1612](#) [CPTS-4R4E-R](#) [TDKEZW3](#) [I350F2](#) [I350F2BLK](#) [I350T2V2](#) [V23993-USB1029A](#) [100-POE4](#) [105FX-ST](#)
[105TX-SL](#) [SEG305-T](#) [70001992](#) [70001993](#) [708TX](#) [854-19720](#) [I350T4V2BLK](#) [I350T2V2BLK](#) [I210T1BLK](#) [PD-OUT/MBK/S](#) [SX-BR-](#)
[4600WAN2-US](#) [W4S105C](#) [X710DA4FHBLK](#) [I350T2V2BLK](#) [936714](#) [GX-ID1611](#) [3G8F7-DRM21-E](#) [EKI-2525I-BE](#)
[BCM53426A0KFSBG](#) [PCM-24R2GL-AE](#) [96NIC-1G4P-PE-IN2](#) [0.70001777](#) [BCM53402A0KFSBG](#) [105FXE-SC-15-POE](#) [PD-OUT/MBK/G](#)
[856-15410](#) [X520QDA1](#) [BCM84794A1KFSBG](#) [X520DA2OCP](#)