




DIMENSION		0~8	8~25	25~50	50~100	100~200	200~300	∠ (DEG)
TOLERANCE		±0.08	±0.10	±0.12	±0.18	±0.20	±0.30	±0.20°
MARK	ZONE	DESCRIPTION	REV.	Modify		APRD.	DATE	
			A					

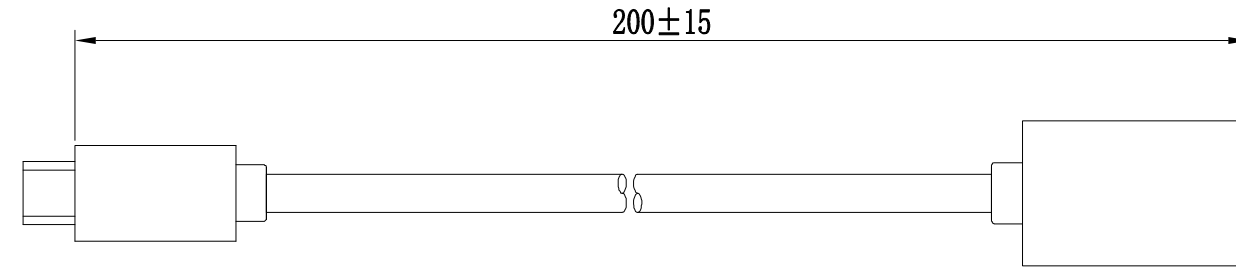


Conn.1

Conn.2

NOTE:
 1.Electronic Test(Electrical Performance):
 100% Open & Short & Mis-wire Test
 Conductive Resistance:3 OHM Max.
 Insulation Resistance:5M OHMS Min.
 Insulation Voltage: 300V DC/10ms
 Hi-Pot: AC300V,10ms.
 All Test Duability: 0.3SEC
 2.RoHS Compliant Certified
 3.One cable per palybag

Wire Diagram



CONN1:TYPE-CM		CONTACT	CONN2:USB3.0-AF	
PIN	Signal Name	Signal Name	PIN	Signal Name
A1,A12,B1,B12	GND	GND_PWRrt1 SDP1_Drain,SDP2_Drain	4 7	GND GND_DRAIN
A4,B4,A9,B9	VBUS	PWR_VBUS1	1	VBUS
A5	CC			
B5	vcom			
A6	Dp1	UTP_Dp	3	D+
A7	Dn1	UTP_Dn	2	D-
A2	SSTXp1	SDPp1	9	MicB_SSRX+
A3	SSTXn1	SDPn1	8	MicB_SSRX-
B11	SSRXp1	SDPp2	6	MicB_SSTX+
B10	SSRXn1	SDPn2	5	MicB_SSTX-
Shell	Shield	Shield	Shell	Shield

4	material	35P PVC BLACK ROHS	g	20
3	connector	3.0Ver TYPE-CM 5.1K Ω. BLACK Insulator.Shell	PCS	1
2	connector	3.0Ver USB_A F.Blue Insulator.Shell	PCS	1
1	CABLE	USB3.0 (1P#30+D+AL+MyIar)*2C+1P#30+2C#24+AL+64TC+B OD4.5 Black	mm	0.15
	NAME	MATERIAL DESCRIPTION	UNIT	QTY

VCOM International Ltd.			SHEET:	
			1 OF 1	
DRWN: Xiang	DATE: 2022.12.6	PART NAME: USB 3.0 AF TO TYPE CM CABLE	<input checked="" type="checkbox"/> 3rd	
CHKD:	DATE:			
APRD:	DATE:	CUST NO. :	PAPER SIZE	A4
MO:	UNIT: mm		WEIGHT: g	
CUST:	SCALE:	DRAWING NO. :CU409		

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Audio Cables](#) / [Video Cables](#) / [RCA Cables](#) category:

Click to view products by [VCOM](#) manufacturer:

Other Similar products are found below :

[1-3737-600-3216](#) [LF3BLX](#) [30-513](#) [28-511-0](#) [RCA05RCAB](#) [427493000-3](#) [49152A-010-S2](#) [32-3766](#) [32HR07284X](#) [CAB-LFH-V16A16S0](#)
[DB25M02XLRMXLRFY](#) [426052000-3](#) [LF1BKX](#) [TT746](#) [CA-MINIDP-DVIM-6FT](#) [CA-MINIDP-DVIM-3FT](#) [CA-MINIDP-DVIM-10FT](#)
[CA-MINIDP-VGAF-3FT](#) [CA-MINIDP-HDMIF-6FT](#) [MDC8P53](#) [LF10GNX](#) [427492100-3](#) [LF4BLX](#) [cab-DP to HDMI Passive](#) [VGA CABLE](#)
[DISPLAYPORT TO VGA CABLE](#) [TT3GNX](#) [1700021831-01](#) [Audio Cable](#) [427491690-3](#) [427528000-3](#) [TT2PX](#) [SPEAKER CABLE](#)
[L=300mm](#) [Speaker cable](#) [594E3412000E](#) [32007-005500-200-RS](#) [BCLBH](#) [BANHF](#) [BAPHG](#) [COQBI](#) [COQBG](#) [COEHG](#) [COJBI](#) [DAEBK](#)
[51771](#) [39448](#) [VAB-S04-L](#) [VAS-A13-B200](#) [VAS-A13-B300](#) [KABADA USBC/JACK OEM-C11](#)