



NTC Thermistors, Radial Leaded with Low B_{25/85} Values



QUICK REFERENCE DATA		
PARAMETER	VALUE (per case)	UNIT
Resistance value at 25 °C	5K, 10K	Ω
Tolerance on R ₂₅ -value	± 1	%
B _{25/85} -value	3324, 3435	K
Tolerance on B _{25/85} -value	± 1	%
Operating temperature range (short term)	-55 to +125	°C
Response time (63.2 %) 25 °C to 750 °C still air (for info by case)	1.2	s
Dissipation factor δ in still air (for each case)	7	mW/K
Maximum power dissipation (by case)	250	mW
Weight	approx. 0.22	g

FEATURES

- Alternate B_{25/85} to the NTCLE100.. series
- Linearization possible over a wider range of temperature because lower sensitivity than standard NTCLE101...SB0 (lower B_{25/85} values)
- Delivered in bulk (delivery on tape and reel possible)
- Material categorization: For definitions of compliance please see www.vishay.com/doc?99912



RoHS COMPLIANT

APPLICATIONS

- Temperature measurement, sensing, control, and compensation

MOUNTING

Please refer to information provided for generic NTCLE100E3... series.

PACKAGING

The thermistors are packed in cardboard boxes, each box contains 500 units.


RELIABILITY INFORMATION

By soldering in any position. Not intended for potted applications.

ELECTRICAL DATA AND ORDERING INFORMATION					
VISHAY SAP ORDERING NUMBER (1)	R ₂₅ -VALUE (kΩ)	dR ₂₅ -VALUE (%)	B _{25/85} -VALUE (K)	B _{25/85} -TOL. (%)	DESCRIPTION
NTCLE101E3C90172	5	1	3324	1	NTC thermistors with two tin-plated copper leads, 90172 and 90173 are respectively red and white lacquered and are non insulated
NTCLE101E3C90173	10	1	3435	1	

Note

(1) The complete resistance vs temperatures characteristics can be downloaded at: www.vishay.com/resistors-non-linear/ntc-curve-list/.

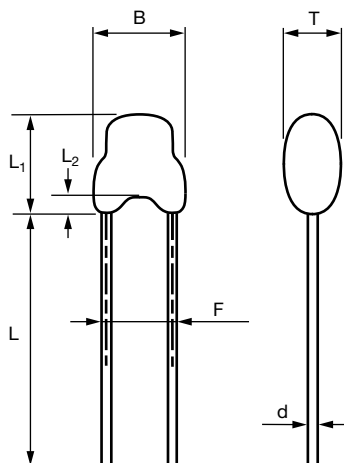

DIMENSIONS in millimeters			
PARAMETER	VALUE		
	NOM.	MIN.	MAX.
B	Not applicable	Not applicable	3.5
T	Not applicable	Not applicable	2.8
L ₁	Not applicable	Not applicable	8
L ₂	2	1	3
L	Not applicable	17	Not applicable
F	2.54	For information only	
d	0.6	0.54	0.66



Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [NTC \(Negative Temperature Coefficient\) Thermistors category:](#)

Click to view products by [Vishay manufacturer:](#)

Other Similar products are found below :

[118-253FAJ-P01](#) [121-202EAC-P01](#) [123-802EAJ-P01](#) [128-105NDP-Q02](#) [135-503LAD-J01](#) [B57250V2104F360](#) [B57250V2473F560](#)
[B57620C472K962](#) [NTCLE410E3103F](#) [A1004SG22P0](#) [199-303KAF-A02](#) [30054-4](#) [M09N038F](#) [B57423V2473H062](#) [B57471V2474H062](#)
[B57620C5223J062](#) [500-52AA04-101](#) [526-31AA19-104](#) [526-31AN12-202](#) [103AT-5-1P-FT](#) [10K3A542I](#) [112-103FAG-H02](#) [112-104KAG-](#)
[B01](#) [11028414-00](#) [111-182CAG-H01](#) [112-103FAF-H01](#) [112-104KBF-F01](#) [118-202CAJ-P01](#) [526-31AA79-102](#) [B57442V5103J62](#)
[B57401V2103H62](#) [B57621C5472J62](#) [194303KEVA01](#) [NTCACAPE3C90193](#) [USP11595](#) [B57359V2224J260](#) [B57343V5103J360](#) [50070974-](#)
[003-01](#) [189-602LDR-A01](#) [B57621C5472K062](#) [B57421V2153J062](#) [B57230V2103H260](#) [B57471V2684H062](#) [B57471V2333H062](#) [126-](#)
[153YJC-B01](#) [NTCS0603E3333FHT](#) [118-802EAJ-P01](#) [121-103FAC-Q02](#) [144-101FAG-001](#) [526-31AD07-153](#)