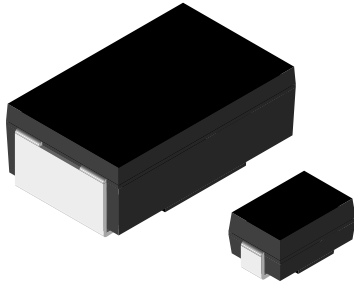


Wirewound Resistors, Precision Power, Surface Mount



FEATURES

- All welded construction
- Molded encapsulation
- Wraparound terminations
- Excellent stability at different environmental conditions
- High power ratings (up to 3 W)
- Superior surge capability
- Available in non-inductive styles with Aryton-Perry winding (WSN in lieu of WSC, maximum resistance is one-half WSC range)
- Compliant to RoHS directive 2002/95/EC



RoHS*
COMPLIANT

STANDARD ELECTRICAL SPECIFICATIONS						
GLOBAL MODEL	HISTORICAL MODEL	SIZE INCH	POWER RATING $P_{70\text{ }^\circ\text{C}}$ W	TOLERANCE $\pm \%$	RESISTANCE RANGE Ω	ENCAPSULATION
WSC01/2	WSC-1/2	2012	0.5	0.5, 1, 5	0.1 to 4.99	Epoxy
WSC0001	WSC-1	2515	1.0	0.5, 1, 5	0.1 to 2.77K	Thermoplastic ⁽²⁾
WSC2515	WSC2515	2515	1.0	0.5, 1, 5 ⁽¹⁾	0.1 to 2.5K	Thermoplastic
WSC0002	WSC-2	4527	2.0	0.5, 1, 5	0.1 to 4.92K	Thermoplastic ⁽²⁾
WSC4527	WSC4527	4527	2.0	0.5, 1, 5	0.1 to 4.92K	Thermoplastic
WSC6927	WSC6927	6927	3.0	0.5, 1, 5	0.1 to 8K	Thermoplastic

Notes

- Part marking: 1/2 W - DALE, value; 1 W - model, value, tolerance, date code; 2 W and 3 W - DALE, model, value, tolerance, date code
- ⁽¹⁾ 0.1 % and 0.25 % is available on the WSC2515 for 0.499 Ω to 2.5 k Ω range
- ⁽²⁾ As of 1/1/2010, the WSC0001 and WSC0002 are molded with thermoplastic in lieu of epoxy. Reference PCN-DR-002-2009 and PCN-DR-003-2009.

TECHNICAL SPECIFICATIONS						
PARAMETER	UNIT	WSC01/2	WSC0001	WSC2515	WSC0002	WSC4527/WSC6927
Temperature Coefficient	ppm/ $^\circ\text{C}$	0.1 Ω to 0.99 $\Omega = \pm 90$ 1.0 Ω to 4.99 $\Omega = \pm 50$	0.1 Ω to 0.99 $\Omega = \pm 90$ 1.0 Ω to 26.5 $\Omega = \pm 50$ 26.51 Ω and above $= \pm 20$	0.1 Ω to 0.3 $\Omega = \pm 150$ 0.31 Ω to 0.99 $\Omega = \pm 90$ 1.0 Ω to 26.5 $\Omega = \pm 50$ 26.51 Ω and above $= \pm 20$	0.1 Ω to 0.99 $\Omega = \pm 90$ 1.0 Ω to 9.9 $\Omega = \pm 50$ 10.0 Ω and above $= \pm 20$	0.1 Ω to 0.3 $\Omega = \pm 150$ 0.31 Ω to 0.99 $\Omega = \pm 90$ 1.0 Ω to 9.9 $\Omega = \pm 50$ 10 Ω and above $= \pm 20$
Dielectric Withstanding Voltage	V_{AC}	> 500	> 500	> 500	> 500	> 500
Insulation Resistance	Ω	> 10^9	> 10^9	> 10^9	> 10^9	> 10^9
Operating Temperature Range	$^\circ\text{C}$	- 65 to + 175	- 65 to + 275	- 65 to + 275	- 65 to + 275	- 65 to + 275
Maximum Working Voltage	V	$(P \times R)^{1/2}$	$(P \times R)^{1/2}$	$(P \times R)^{1/2}$	$(P \times R)^{1/2}$	$(P \times R)^{1/2}$
Weight/1000 pieces (typical)	g	90	165	165	760	760/1675

GLOBAL PART NUMBER INFORMATION

Global Part Numbering example: WSC2515R7000FEA (preferred part numbering format)

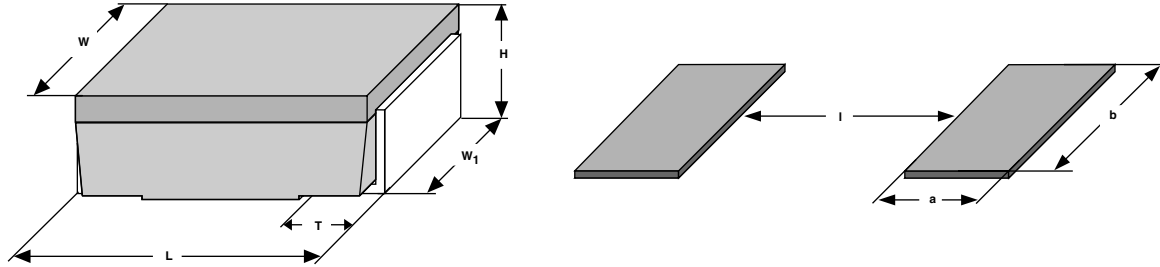
W	S	C	2	5	1	5	R	7	0	0	0	F	E	A		
GLOBAL MODEL		SIZE		VALUE			TOLERANCE			PACKAGING			SPECIAL			
WSC WSN		01/2 0001 2515 0002 4527 6927		R = Decimal K = Thousand R7000 = 0.70 Ω 1K500 = 1.5 k Ω			B = $\pm 0.1\%$ ⁽³⁾ C = $\pm 0.25\%$ ⁽³⁾ D = $\pm 0.5\%$ F = $\pm 1.0\%$ G = $\pm 2.0\%$ H = $\pm 3.0\%$ J = $\pm 5.0\%$ K = $\pm 10\%$			EA = Lead (Pb)-free, tape/reel EK = Lead (Pb)-free, bulk TA = Tin/lead, tape/reel (R86) BA = Tin/lead, bulk (B43)			(Dash number) (Up to 2 digits) From 1 to 99 as applicable			

Historical Part Number example: WSC-1 0.7 Ω 1% R86 (will continue to be accepted, but will be supplied as WSC0001R7000FTA)

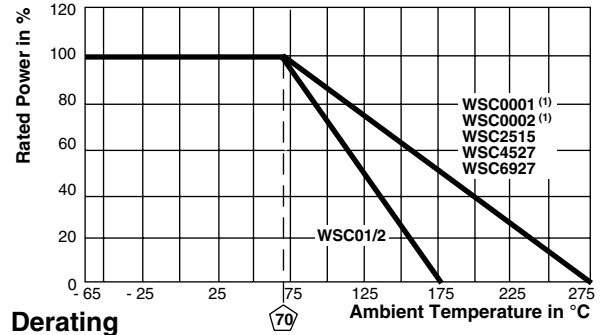
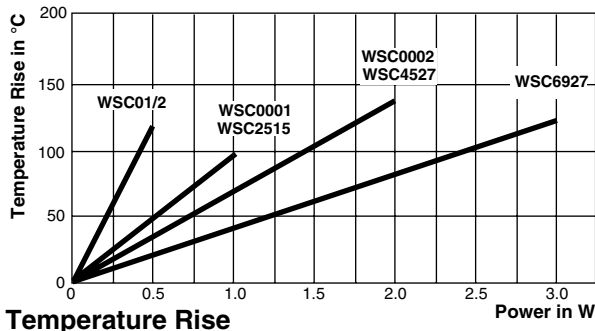
WSC-1	0.7 Ω	1%	R86
HISTORICAL MODEL	RESISTANCE VALUE	TOLERANCE	PACKAGING

Note

- ⁽³⁾ WSC2515 only
- * Pb containing terminations are not RoHS compliant, exemptions may apply

DIMENSIONS in inches (millimeters)


MODEL	DIMENSIONS					SOLDER PAD DIMENSIONS		
	L	H	T	W	W ₁	a	b	l
WSC01/2	0.200 ± 0.020 [5.08 ± 0.508]	0.096 ± 0.015 [2.44 ± 0.381]	0.040 ± 0.010 [1.02 ± 0.254]	0.125 ± 0.005 [3.18 ± 0.127]	0.050 ± 0.010 [1.27 ± 0.254]	0.085 [2.16]	0.070 [1.78]	0.080 [2.03]
WSC0001	0.250 ± 0.020 [6.35 ± 0.508]	0.110 ± 0.015 [2.79 ± 0.381]	0.045 ± 0.010 [1.14 ± 0.254]	0.150 ± 0.005 [3.81 ± 0.127]	0.098 ± 0.005 [2.49 ± 0.127]	0.090 [2.29]	0.115 [2.92]	0.120 [3.05]
WSC2515	0.250 ± 0.020 [6.35 ± 0.508]	0.110 ± 0.015 [2.79 ± 0.381]	0.045 ± 0.010 [1.14 ± 0.254]	0.150 ± 0.005 [3.81 ± 0.127]	0.098 ± 0.005 [2.49 ± 0.127]	0.090 [2.29]	0.115 [2.92]	0.120 [3.05]
WSC0002	0.445 ± 0.032 [11.30 ± 0.813]	0.162 ± 0.015 [4.11 ± 0.381]	0.100 ± 0.010 [2.54 ± 0.254]	0.275 ± 0.005 [6.98 ± 0.127]	0.215 ± 0.005 [5.46 ± 0.127]	0.155 [3.94]	0.230 [5.84]	0.205 [5.21]
WSC4527	0.455 ± 0.020 [11.56 ± 0.508]	0.167 ± 0.010 [4.24 ± 0.254]	0.100 ± 0.010 [2.54 ± 0.254]	0.275 ± 0.005 [6.98 ± 0.127]	0.215 ± 0.005 [5.46 ± 0.127]	0.155 [3.94]	0.230 [5.84]	0.205 [5.21]
WSC6927	0.690 ± 0.032 [17.53 ± 0.813]	0.280 ± 0.015 [7.11 ± 0.381]	0.100 ± 0.010 [2.54 ± 0.254]	0.275 ± 0.005 [6.98 ± 0.127]	0.215 ± 0.015 [5.46 ± 0.381]	0.155 [3.94]	0.235 [5.97]	0.470 [11.94]


Note

(1) As of 1/1/2010, WSC0001 and WSC0002 will be molded with thermoplastic and have the higher 275 °C temperature derating

PERFORMANCE		
TEST	CONDITIONS OF TEST	TEST LIMITS
Thermal Shock	- 55 °C to + 150 °C, 1000 cycles, 15 min at each extreme	± (0.5 % + 0.05 Ω) ΔR
Short Time Overload	5 x rated power for 5 s	± (0.2 % + 0.05 Ω) ΔR
Low Temperature Storage	- 65 °C for 24 h	± (0.2 % + 0.05 Ω) ΔR
High Temperature Exposure	1000 h at + 275 °C (+ 175 °C for WSC01/2)	± (0.5 % + 0.05 Ω) ΔR
Bias Humidity	+ 85 °C, 85 % RH, 10 % Bias, 1000 h	± (0.2 % + 0.05 Ω) ΔR
Mechanical Shock	100 g's for 11 ms, 5 pulses	± (0.1 % + 0.05 Ω) ΔR
Vibration	Frequency varied 10 Hz to 500 Hz in 1 min, 3 directions, 9 h	± (0.1 % + 0.05 Ω) ΔR
Load Life	1000 h at rated power, + 70 °C, 1.5 h "ON", 0.5 h "OFF"	± (1.0 % + 0.05 Ω) ΔR
Resistance to Solder Heat	+ 260 °C solder, 10 s to 12 s dwell, 25 mm/s emergence	± (0.5 % + 0.05 Ω) ΔR

PACKAGING				
MODEL	REEL			
	TAPE WIDTH	DIAMETER	PIECES/REEL	CODE
WSC01/2	12 mm/embossed plastic	330 mm/13"	2000	EA/TA
WSC0001/WSC2515	16 mm/embossed plastic	330 mm/13"	2000	EA/TA
WSC0002/WSC4527	24 mm/embossed plastic	330 mm/13"	1200	EA/TA
WSC6927	32 mm/embossed plastic	330 mm/13"	725	EA/TA

Note

- Embossed Carrier Tape per EIA-481-1, 2, 3



Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Wirewound Resistors - SMD category:](#)

Click to view products by [Vishay manufacturer:](#)

Other Similar products are found below :

[RWS5 R22 F B](#) [WSM24R99FLFTR](#) [RWS5 R47 J B](#) [RWS5 R68 F B](#) [SMW5R11JT](#) [WSC2515365R0FTB](#) [RWS5 82R F B](#) [RWS5 120R F B](#)
[RWS5 10R F B](#) [ACS-10S-15R-J](#) [SMW3300RJT](#) [RW7S0FB180RJET](#) [RW5S0FA470RJET](#) [RW7S0FB4K70JET](#) [RW7S0FB4K70FET](#) [RWS5](#)
[1R J B](#) [RWS5 33R J B](#) [RWS1 50R F B](#) [PWR4318W1001JE](#) [PWR4318W4700JE](#) [PWR2010WR500FE](#) [PWR4318WR470JE](#)
[QL0000J0220200](#) [QL0025J0470000](#) [QL0050J0102000](#) [QL0050J0362000](#) [QL0080J0470000](#) [R100W-10R](#) [R100W-470R](#) [R100W-4R7](#)
[R200W-220R](#) [R200W-22R](#) [R200W-47R](#) [R50W-10R](#) [R50W-22R](#) [R50W-2R2](#) [R80W-47R](#) [SMW5R36JT](#) [SMW5R24JT](#) [SMW591RJT](#)
[SMW52R4JT](#) [SMW513RJT](#) [SMW562RJT](#) [SMW5240RJT](#) [SMW51R6JT](#) [JW08](#) [RTS-01-100-100R-5-5/A](#) [RTS-01-100-10K-5-5/A](#) [RTS-01-](#)
[100-10R-5-5/A](#) [RTS-01-100-15R-5-5/A](#)