

.290" MOUNT PANEL LIGHTS

90 Series

- Mounting Hardware Provided - For Detailed LED Data, See Discrete Section, MODEL 200

1	Model	Wires
C ^[1] (optional)	905 ^[2] 91 94 96 961 964	W (optional)

TO ORDER, FOLLOW THE EXAMPLE:

Select one **BOLD** component from each numbered category in the tables below.

1	Model	2	LED	3	Voltage	4	Lens Diffusion	5	Lens Color	6	Bezel Color
	94		-LRG		12H		-C		W		0

→ Part Number **94-LRG12H-CW0**

STANDARD INTENSITY - DIFFUSED ENCAPSULATION						
2	LED	Color	λpk (nm)	Iv ^[3] (mcd)	Viewing Angle	V/C Table ^[5]
	-BR^[4]	RED	635	14	60	I
	-BA^[4]	AMB	583	16	60	I
	-BG^[4]	GRN	565	10	60	I

Voltage/Current	
Design Vf/If	Max Vf/If
V/C Table I	
5V/22mA	5.5V/28mA
12V/20mA	14V/25mA
15V/24mA	16.5V/28mA
24V/17mA	26V/20mA
28V/16.5mA	30V/18mA
48V/15mA	50V/16mA
60V/9mA	65V/10mA
120VAC/3.5mA	130VAC/4mA

3	Voltage ^[6]
	2
	5H
	12H
	15H
	24H
	28H
	48H
	60H
	120 ^[9]

MEDIUM INTENSITY - TINTED ENCAPSULATION					
LED	Color	λpk (nm)	Iv ^[3] (mcd)	Viewing Angle	V/C Table ^[5]
-BCR	RED	635	120	35	I
-BCA	AMB	583	100	35	I
-BCG	GRN	565	80	24	I

Voltage/Current	
Design Vf/If	Max Vf/If
V/C Table II	
5V/15mA	5.5V/23mA
12V/15mA	14V/20mA
15V/15mA	16.5V/18mA
24V/15mA	26V/18mA
28V/15mA	30V/17mA
48V/9.5mA	50V/10mA
60V/7mA	65V/8mA
120VAC/3.5mA	130VAC/4mA

4	Lens Diffusion
	-C
	Clear
	-N
	Diffused

HIGH INTENSITY - WATERCLEAR ENCAPSULATION					
LED	Color	λpk (nm)	Iv ^[3] (mcd)	Viewing Angle	V/C Table ^[5]
-NWR	RED	634	2800	30	I
-NWO	ORG	605	2000	30	I
-NWA	AMB	592	2800	30	I
-NWG	GRN	520	2400	45	II
-NWB	BLU	465	700	45	II
-NWW^[8]	CWHT		2500	50	II
-NWL^[8]	WWHT		1800	50	II
-NKR	RED	634	3600	15	I
-NKO	ORG	605	8000	15	I
-NKA	AMB	592	3600	15	I
-NKG	GRN	520	10000	15	II
-NKB	BLU	465	3000	15	II
-NKW^[8]	CWHT		9200	20	II
-NKL^[8]	WWHT		9200	15	II

5	Lens Color	
	R Red	B Blue
	A Amber	W Water Clear
	Y Yellow	
	G Green	-S Smoke ^[10]

SPECIALTY LEDs - DIFFUSED ENCAPSULATION						
LED	Color	λpk (nm)	Iv ^[3] (mcd)	Viewing Angle	V/C Table ^[5]	Description
-RLP^[7]	RED	635	2.3	50	[5]	Low Power
-ALP^[7]	AMB	583	2.1	50	[5]	Low Power
-GLP^[7]	GRN	565	2.3	50	[5]	Low Power
-LRG^[8]	RED/GRN	660/565	90/40	60	I	Bi-Color, Red Cathode

6	Bezel Color
	0
	Black
	9
	White

[1] The C option specifies a pin length = .20" for panel lights mounted in the PS90 or PS90T socket (pg. 48). Mounting hardware is included with the socket. Do not select the W option. C and standard pins are not solderable.

[2] Model 905 has no lens. Omit Lens Diffusion and Color (e.g. 905-BG5H-0).

[3] Iv = typical luminous intensity @ If = 20mA (Ta = 25°C). Iv is measured without lenses. For Low Power LEDs, If = 2mA.

[4] Use with Model 905 only.

[5] See Voltage/Current table for design specifications. Design current for low power LEDs = 2mA.

[6] Ta = 25°C. Voltage "2" indicates external resistor required. Voltages 5H through 60H are VDC. For AC operation, insert D after Voltage (e.g. 24HD). D indicates built-in rectifier; not required for 5H or 120VAC. DC operation not available for 120V. Bi-Color not available in AC voltages.


[7] Omit H when selecting a voltage (e.g. 91-RLP12-CW0).

[8] Select -CW or -NW Lens only.


[9] Select high intensity LEDs only.

[10] Omit Lens Diffusion when selecting smoked lens (e.g. 91-NWG24H-S0).


905 (no lens)

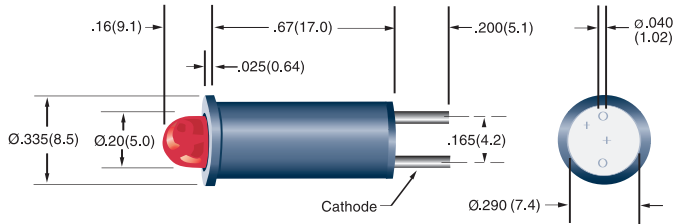


91

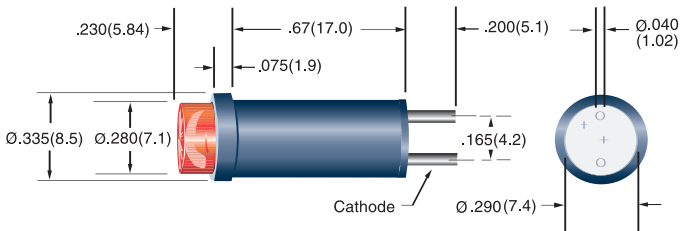


94 (flush lens)

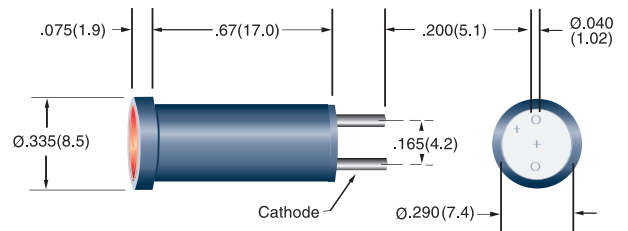


96

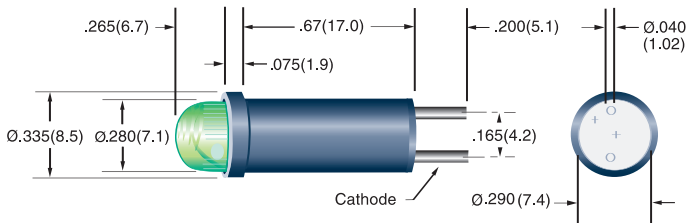


961

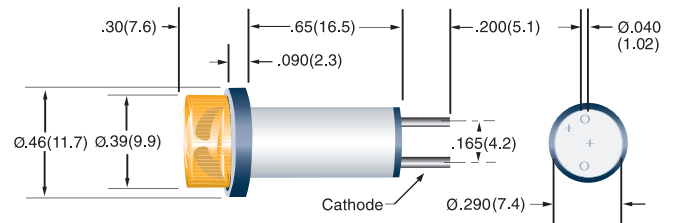

964

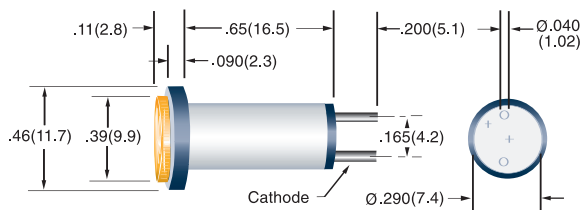

TC9 & NW9 Mounting Hardware

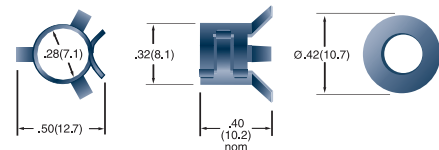

Standard Wire Leads:

6.0" total length(nominal)/.50" stripped (nominal), red anode/black cathode, 24 AWG TPB UL1061 insulation. Contact factory for other lengths, gauges and colors.

All dimensions are in inches (mm)

Tolerances: .xx"(.x) ±.025"(.63) / .xxx"(.xx)±.010"(.25)
Specifications are subject to change without notice.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [LED Panel Mount Indicators](#) category:

Click to view products by [Visual Communications Company](#) manufacturer:

Other Similar products are found below :

[607-3232-140F](#) [821-0331-503](#) [FL2870C8R](#) [FL2950WL7B](#) [FL2950WL8G](#) [FL589WL8R](#) [FL67C8R](#) [H8630FBBA3](#) [NL177WL2A](#)
[NL177WL3G](#) [NL276C2A](#) [NL2950BWL3G](#) [NL589WL2R](#) [NL67C2C](#) [NL67C3R](#) [C480AABG3](#) [PB22BM41K](#) [PB22SIM40Y](#)
[PB22SKRS31KC](#) [L32R-R2-2311](#) [L3353-MWRG](#) [L39UR-R24-2111](#) [L58D-G2-W](#) [L58D-Y2-W](#) [L59D-R12-W](#) [L59UD-R12-W](#) [L625DG](#)
[L625DR](#) [LE177WL39007](#) [LH1048BSWL3702](#) [LH1048BWL3702](#) [LH382A](#) [LH677G](#) [LHM628A](#) [FL276WL7R](#) [FL2950BWL7R](#)
[FL2950WL7R](#) [FL2950WL8R](#) [FL2950WL8R-12](#) [FL2951WL8G](#) [FL2951WL8R](#) [FL589C7R](#) [FL67WL8G](#) [MPC5BCW18.0](#) [556-1605-808F](#)
[556-1705-809F](#) [556-3008-839F](#) [558-0201-818F](#) [559-0001-813F](#) [559-1301-801F](#)