

**HSP**

NOTES:  
 Rated Current:3.0AMP.  
 Contact Resistance:20mΩ Max.  
 Withstand Voltage:1000V AC/DC  
 Insulation Resistance:1000MΩ Min.  
 Operation Temperature:-40°C to +105°C



Contact Material:Brass  
 Contact Plating:Au or Sn Over Ni  
 Insulator Material:PA9T+33%G.F UL94V-0 BK

### Ordering Information

1125-11 XX XX Z XXX C R XX



No. of Pins Contact Plating Pin Length Insulator Packing Series No.  
 02-40 G0=Gold Flash L=A+B+2.8 C=PA9T Material P=Tube+CAP R=Tube+CAP  
 G4=15u"Gold G5=30u"Gold S0=Gold Flash/Tin S3=10u"Gold/Tin S4=15u"Gold/Tin S5=30u"Gold/Tin SN=Tin SM=Matte Tin

Item	Pin Length	A	B	Mating	Standard	Alternate
	11.80	3.00	6.00	2171	2185	

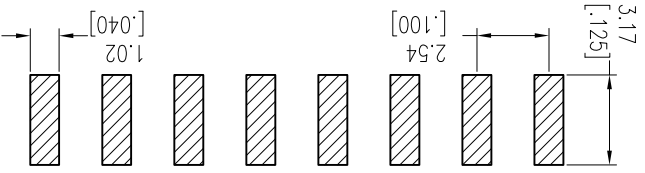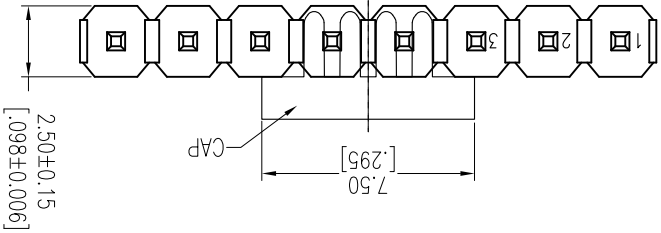

Recommended P.C.B Layout (Top Side)  
 (PCB BOARD TOLERANCE±0.05)

Odd Number

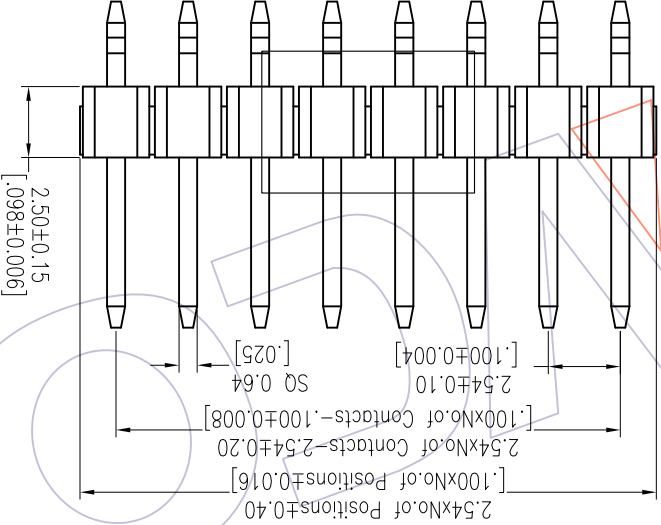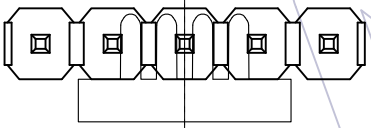

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM TOL	APPROVE	DATE	PROJ.	Customer No.	DATE	SCALE	OPERATION	DRAW	
												DATE	DATE
A0	2012/05/17	NEW		Angle ± 3°									
A1	2018/01/22	Modify P/N	△1	X.XXX ±0.15									
				X.XX ±0.25	CHECK								
				X.X ±0.40	Ruiping	2018/01/22							

WCON  
 WCON-Dongguan  
 WCON-Kunshan  
 Tel: +86 769 85358915  
 Fax: +86 512 57468408  
 E-mail: sdies@wcon.com  
 Http: www.wcon.com

DATE	APPROVE	DATE	SIZE	UNIT	SCALE	DATE	DATE	DATE
2018/01/22		2018/01/22	A4	mm	FIT	2018/01/22	2018/01/22	2018/01/22

TITLE:  
 PH2.54 SINGLE ROW  
 90°SMT H=2.5  
 PART NO.  
 1125-11XXXXXXCRXX

Customer No.  
 WCON-Dongguan  
 WCON-Kunshan  
 Tel: +86 769 85358915  
 Fax: +86 512 57468408  
 E-mail: sdiesks@wcon.com

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Headers & Wire Housings](#) category:*

*Click to view products by [Wcon](#) manufacturer:*

Other Similar products are found below :

[95000-104TRLF](#) [10135584-644402LF](#) [DF62W-EP2022PCA](#) [95000-106TRLF](#) [DF62W-2022SCA](#) [DF62W-EP2022PC](#) [2203348](#) [DF62W-2022SC](#) [1084018](#) [1029039](#) [1084017](#) [802-10-012-10-002000](#) [1112640](#) [1112639](#) [891-007-9SS-BST1T](#) [000-34000](#) [0008550134](#) [0009482033](#) [0009507031](#) [57102-F02-18ULF](#) [57102-S06-03LF](#) [57202-S52-04LF](#) [PCN6-15S-2.5E](#) [0039019024](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [0009508121](#) [0022285053](#) [0050291907](#) [018731A](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#) [60101931](#) [60598-1 \(Cut Strip\)](#) [M1625-3R/100](#) [61062-3](#) [61082-181009](#) [CSU011177004](#) [636-1427](#) [638009-1](#) [641938-9](#) [641991-4](#) [644168-1](#) [644827-2](#) [647662-1](#) [65039-019ELF](#) [65692-001LF](#) [65781-018](#) [65781-047](#)